

Refrigerated Self-Service Case

Lengths include 1" end panels

- HV38RSS 40"L x 42"D x 51-1/4"H
- HV48RSS 50"L x 42"D x 51-1/4"H
- HV56RSS 58"L x 42"D x 51-1/4"H
- HV74RSS 76"L x 42"D x 51-1/4"H



MODEL SHOWN: HV56RSS


STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refig. only)
- Flat front panel
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Shelving removable and adjustable on 1" centers
- Solid back panel
- T-8 top & shelf lights


Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes rear of case)
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel <input type="checkbox"/> White
REAR EXTERIOR COLOR	<input type="checkbox"/> Painted - White	<input type="checkbox"/> Painted - Black <input type="checkbox"/> Stainless steel (w/stainless ext. only)
TRIM COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
BASE	<input type="checkbox"/> Levelers	<input type="checkbox"/> 6"H legs <input type="checkbox"/> Casters (n/a with remote)
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Case to case glass end <input type="checkbox"/> Cutaway with glass <input type="checkbox"/> No end panel (for same case to case connections)
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> Case to case glass end <input type="checkbox"/> Cutaway with glass <input type="checkbox"/> No end panel (for same case to case connections)
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord (self cont.)	<input type="checkbox"/> 6' locking power cord (self cont.) <input type="checkbox"/> Electrical leads (remote)
REFRIGERATION	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	<input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		<input type="checkbox"/> LED lights <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
ACCESSORIES		<input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable wire security cover, locking

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	Integrated Prod Temp ° F
All	40

PLAN VIEW

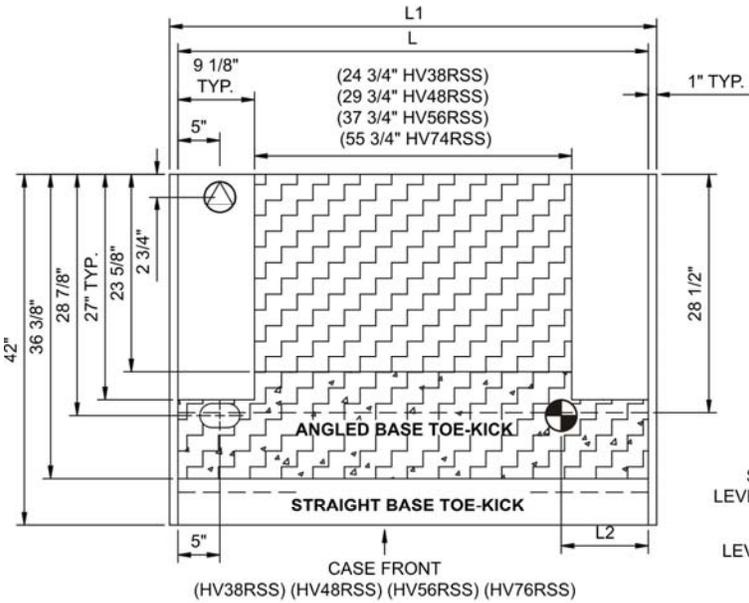

SIDE VIEW

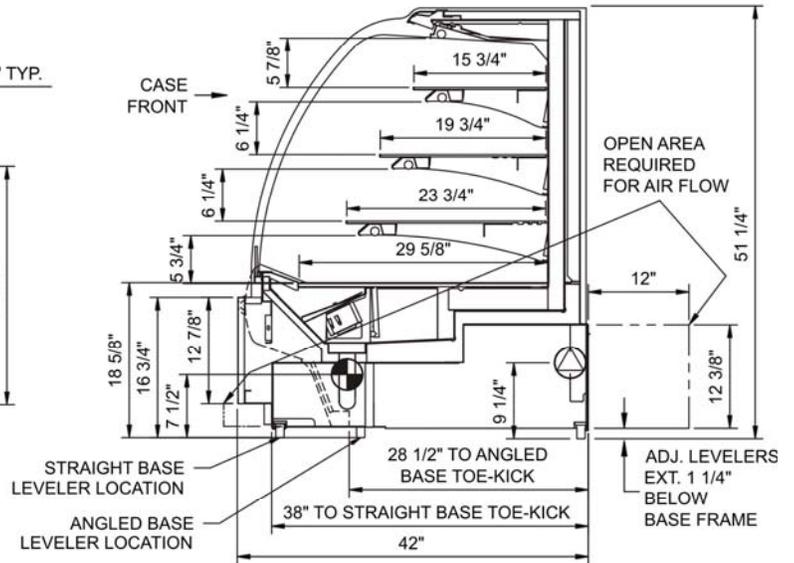

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls	
HV38RSS	38.00	40.00	10.38	Remote(Type I)	Circuit #1	110-120	1	60	2.05	211	2+G	Leads Multiple	24.0	4,226	780	110
				Self-Contained	Circuit #1	110-120	1	60	14.80	1,539	2+G	5-20P or L5-20P	N/A	N/A		
HV48RSS	48.00	50.00	10.38	Remote(Type I)	Circuit #1	110-120	1	60	2.15	223	2+G	Leads Multiple	24.0	5,350	930	110
				Self-Contained	Circuit #1	110-120	1	60	16.00	1,646	2+G	5-20P or L5-20P	N/A	N/A		
HV56RSS	56.00	58.00	10.38	Remote(Type I)	Circuit #1	110-120	1	60	2.65	283	2+G	Leads Multiple	24.0	6,150	930	110
				Self-Contained	Circuit #1	110/230V	1	60	12.00	1,976	3+G	14-20P or L14-20P	N/A	N/A		
HV74RSS	74.00	76.00	10.38	Remote(Type I)	Circuit #1	110-120	1	60	3.06	296	2+G	Leads Multiple	24.0	8,010	1,180	110
				Self-Contained	Circuit #1	110/230V	1	60	15.20	2,344	3+G	14-20P or L14-20P	N/A	N/A		

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 43" Minimum door entry clearance required (Without shipping skid).
- 3) Compressor air ventilation is out the front panel. Front panel cannot be blocked.
- 4) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

