

JOB:	
ITEM NO:	

# **INSULATED HEATED** STAINLESS STEEL BANQUET CART **MODEL EB-150**

## **FEATURES AND BENEFITS:**

- Fully insulated banquet cart designed to hold plated covered meals.
- Bottom mounted power unit lifts out for easy cleaning.
- Standard 1500 Watts, 120 Volts, 15 Amps. Provides guick heat up to 200°F (93°C).
- Stainless steel construction throughout for ease of cleaning.
- · Supplied with three heavy-duty wire grid shelves spaced on 16-1/2" centers to hold (150) 11" covered meals.
- Recessed push/pull handles on both sides prevent damage to walls; allows easy maneuvering.
- One piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty 6" wheels, two swivel with brakes. Rolls easily, even over carpeted surfaces. Staggered mounting provides mobility when fully loaded especially over uneven surfaces.










# **ACCESSORIES and OPTIONS** (Available at extra cost):

- Gravity Transport Latch
- Menu Card Holder
- □ Thermometer Cover
- Various Caster Options
- 240 Volt Service

See page F-4 for accessory details.

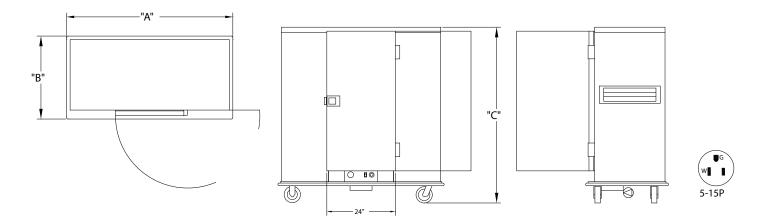

CRES COR MODEL NO.	MEAL CAPACITY COVERED PLATE DIA.		DIM "A"	DIM "B"	DIM "C"		INSIDE DIMENSIONS*			WEIGHT			
	11"	12"	13"	WIDTH	DEPTH	HEIGHT		WIDTH	DEPTH	HEIGHT		ACT.	
EB-150	150	150 120	120 105	105	58-3/4"	26	65	IN	55-3/4	23	54-1/2	LB	395
	EB-150		150	00   120	150   120	105	1500	660	1655	MM	1420	585	1385

<sup>\*</sup>Door opening 22 X 50-1/2 (560 X 1285).

Capacity based on covered plate dia. with nesting height of 3" for plate and cover.

#### **CABINET:**

- · Body: 22 ga. non-magnetic stainless steel.
- Reinforcement: Internal framework of 14 ga. 300 series stainless steel
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in back wall, side walls, door; 2" in top.
- Push handles: 1" dia. stainless steel tubing, recessed on both sides.

## BASE:

- · One piece construction, .190 aluminum, welded.
- Casters: 6" dia., rubber tires, 2-1/8" wide, load cap. 350 lbs. each, temp. range -40°/+160°F. Zerk fittings in hub. Two rigid type; two swivel type equipped with brakes.
- Perimeter bumper: Gray, non-marking rubber, 1 x 1.

#### DOORS:

- Formed 22 ga. non-magnetic stainless steel.
- · Latches: Polished stainless steel, slam type; mounted inboard.
- · Door gaskets: Perimeter type, silicone.
- · Hinges: 11 ga. stainless steel, butt type.

#### SHELVES:

 Three shelves. Each shelf made up of nickel chrome plated heavy duty wire grids, 22.688 x 55.375. Three wire grids total. Shelves fixed on 16-1/2" (420 mm) centers. 16" clearance between shelves.

## **HOT UNIT COMPONENTS:**

- Removable without tools.
- · Body: Formed 22 ga. non-magnetic stainless steel
- Thermostat: Electro-mechanical, ambient to 200°F (93°C).
- Thermometer: Analog type.
- Switch: ON-OFF rocker type, lighted
- Power cord: Permanent, 10 ft., 14/3 ga. with molded plug.
- Heater (1): 1500 Watt.
- · Blower motor.

#### **POWER REQUIREMENTS:**

• 1500 Watts, 120 Volts, 60 Hz., single phase, 13.8 Amps., 15 Amp. service.

## SHORT FORM SPECIFICATIONS

Cres Cor Heated Banquet Cart Model EB-150. Removable 20 ga. non-magnetic stainless steel bottom mounted power unit, 1500 Watts, 120 Volts, 60 Hz, single phase, 15 Amp service. Cabinet 22 ga. non-magnetic stainless steel, stainless steel internal frame. Fiberglass insulation in sides 2", back, door and base 1-1/2". Recessed side push handles. Three fixed shelf positions with nickel chrome plated wire grids. Capacity 150 covered meals. Base one piece .190 aluminum, welded and finished, perimeter bumper. Six inch cushion balloon casters with zerk fittings. Load capacity 350 lbs. each. 2-Year parts / 1-Year labor warranty. Provide the following accessories: \_\_\_\_\_ \_\_\_\_ \_\_\_\_\_ .CSA-US,

CSA-C, CSA to NSF4 listed, ENERGY STAR Qualified.

CRES COR

5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.