0	Shelleymatic <sup>®</sup> by Delfield
	CAB4
_	Mobile enclosed four-stack dish dispensers

## Models

- 4 stack unheated dish dispensers
- CAB4-500 CAB4-575
- CAB4-650
- CAB4-725
- CAB4-813
- CAB4-913
- CAB4-1013
- CAB4-1200
- CAB4-1450

4 stack even temp heated dish dispensers

- CAB4-500ET
- CAB4-575ET CAB4-650ET
- CAB4-725ET
- CAB4-813ET
- CAB4-913ET
- CAB4-1013ET
- CAB4-1200ET
- CAB4-1450ET
  - Standard Features
  - Cabinet top to be 16-gauge stainless steel Outer body and corners to be 20-gauge stainless steel
  - Non-marring gray corner bumpers
  - (4) 4.00" locking polyolefin swivel casters
  - Dispenser top flange, vertical side channels and bottom brace are stainless steel
  - Dispenser flange, channels and bottom to be integrally welded
  - Spring supports to be 14-gauge S/S

  - High impact plastic guide posts mounted to flange
  - One year parts and 90 day labor warranty
  - Heated, OT & ET, Features 9' cord and plug
  - Convection heating module and fan motor per dispenser
  - 22-gauge stainless steel jacket around
  - On/off switch on each dispenser

QT- stainless steel cover per dispenser ET maintains 120-140°F (49-60°C)

Adjustable thermostat per dispenser

QT maintains 150-170°F (66-77°C)

4 stack quick temp heated dish dispensers

Project Item Ouantity CSI Section 11400

Approved Date \_

CAB4-813QT

CAB4-913QT

CAB4-1013QT

CAB4-1200QT

CAB4-1450QT

•

## **Options & Accessories**

- 12" diameter S/S dish dispenser tray (-1200 and -1450 models only)
- Rods for oval dishes and diameter adjustment (-813 through -1450 only)
- Stainless steel tube cover (-500 through -725 models only)
- Stainless steel dome cover (-813 through -1450 models only)
- Hold-down rod for dispenser tubes Wrap-around bumpers
- Four 4" or 5" polyurethane casters
- Flange-mount feet in lieu of casters
- 220 volt, 50/60 cycle, single phase
- electrical connections\*
- Shorten dispenser tubes to special length

\* Inclusion of these options will alter the electrical specifications of unit

## **Specifications**

Cabinet top shall be 16-gauge stainless steel with all corners welded and polished and reinforced with heavy-gauge channels. Cabinet exterior panels and corner support angles shall be 20-gauge stainless steel. Unit shall have four 4.00" (10cm) diameter polyolefin swivel casters, and non-marking gray bumpers at each corner.

CAB4-813

Dispenser tube shall have 3 vertical side channels and a bottom brace of 22-gauge stainless steel. Top supporting flange shall be 18-gauge stainless steel. Flange, channels and bottom brace shall be integrally welded together. Flange shall have 3 guide posts molded from high impact plastic.

Self-leveling mechanisms shall be field adjustable by adding or removing stainless steel extension springs on perimeter of vertical side channels. The dish carrier head shall be stainless steel welded rods with a removable 18-gauge stainless steel top plate.

Capacity of tubes shall be approximately 72 dishes, with a maximum stacking height of 24.00" (61cm).

Models without "-ET" or "-QT" suffix are unheated.

dispensers only: Unit shall be supplied with 9' (2.7m) cord and NEMA 6-20P plug. Electrical connections shall be 208 volt, 60 hertz, single phase. Each tube shall have its own convection heating module consisting of a single 400 or 700 watt heating element and fan motor, located in the center of the interior bottom cavity. Air intake shall have a filter. Each tube shall have an adjustable thermostat inside the motor housing and an ON/OFF switch on one of the dish guide posts. Unit shall maintain temperature between 120°F-140°F (49°C-60°C).

The following applies to CAB4-OT guick temp heated dispensers only: Unit shall be supplied with 9' (2.7m) cord and NEMA 6-20P plug. Electrical connections shall be 208 volt. 60 hertz, single phase. Each tube shall have its own convection heating module consisting of a single 700 watt heating element and fan motor, located in the center of the interior bottom cavity. Air intake shall have a filter. Each tube shall have an adjustable thermostat inside the motor housing and an ON/OFF switch on one of the dish guide posts. Unit shall maintain temperature between 150°F-170°F (66°C-77°C). Each



Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619

www.delfield.com






- Carrier head made of welded rods with a removable 18-gauge top plate
- Field adjustable self-leveling mechanism
- dispenser
  - Air intake shall be filtered

The following applies to CAB4-ET even temp heated

tube shall have a stainless steel dome cover.



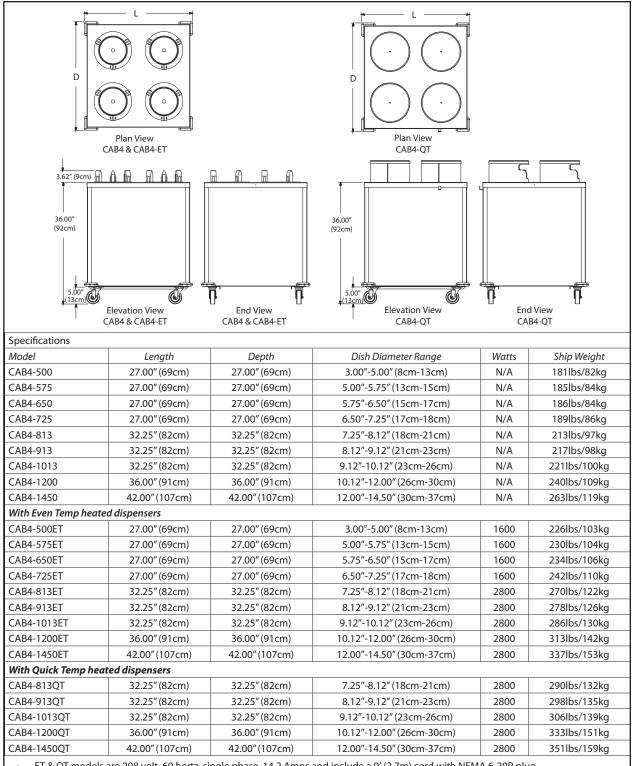

ET & QT models are 208 volt, 60 hertz, single phase, 14.2 Amps and include a 9' (2.7m) cord with NEMA 6-20P plug.

Optional adjusting rods (available on 813–1450 models only) reduce the maximum round dish diameter by 1.25" (3.2cm); overall adjustment by rods is 1.50" (3.8cm). Non-marking adjustment rods must be ordered for each individual dispenser tube; installed at factory only.

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com

Printed in the U.S.A. DSCAB4 05/13



CAB4