
JOB NAME:



MODEL	DIM "A"	DIM "B"	DIM "C"
2178	6"	23"	26-5/8"
	[152.4mm]	[584.2mm]	[676.3mm]
2186	8"	23-1/4"	27-1/8"
	[203.2mm]	[590.6mm]	[689.0mm]
2194	10"	23-7/8"	27-5/8"
	[254.0mm]	[606.4mm]	[701.7mm]
2208	12"	24-1/2"	28-1/8"
	[304.8mm]	[622.3mm]	[714.4mm]
2216	14"	25-1/8"	29"
	[355.6mm]	[638.3mm]	[736.6mm]
2224	16"	25-7/8"	29-5/8"
	[406.4mm]	[657.2mm]	[752.5mm]

ROUGH-IN:

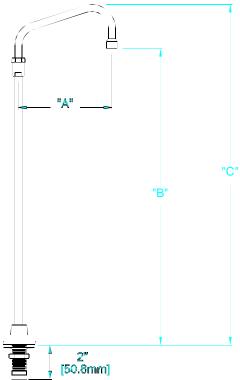

→ ANSI/A112.18.1M

QUANTITY: ITEM NO.:

PRODUCT NAME:

SINGLE DECK KETTLE FILLER

MODEL:

- □ 2178 W/6" SWINGSPOUT
- □ 2186 W/8" SWINGSPOUT
- □ 2194 W/10" SWING SPOUT
- ☐ 2208 W/12" SWING SPOUT
- □ 2216 W/14 SWING SPOUT
- ☐ 2224 W/16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLYLINES (24" 0R 36") CIRCLE LENGTH
- □ VANDALRESISTANTKIT
- □ OTHER _____

FEATURES:

- * SINGLE DECK RIGID BASE
- * 1/2" MALE INLET
- * 1/2" SLIP JOINT

SYSTEM LIMITS

- * TEMP:40°F MIN. TO140°FMAX.
- * PRESSURE200PSIMAX.STATIC
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

* 5.0 LBS