

NOR-LAKE, INCORPORATED  
 727 Second Street  
 P.O. Box 248  
 Hudson, Wisconsin 54016

800-955-5253  
 715-386-2323  
 866-961-5253 Parts  
 800-388-5253 Service  
 715-386-4291 FAX  
 www.norlake.com



# ADVANTEDGE™ REACH-IN FREEZERS



PROJECT: .....

ITEM NUMBER: .....

MODEL NUMBER: .....

1, 2 & 3 DOOR FREEZERS

## SPECIFICATIONS FOR: NLF23-S, NLF49-S, NLF72-S

- **Exterior finish:** Exterior front, sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** Complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door frame heater wires. An interior incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Refrigerant flow is controlled by a capillary tube. R-404a refrigerant. Operating temperature: -5°F.
- **Approvals:** UL, C-UL, ETL Sanitation and ENERGY STAR® listed \*\*

## STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Door opening heaters
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature: -5°F
- Polyurethane insulation
- R-404a refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR® listed \*\*
- Warranties: 3 year parts and labor, 5 year compressor

## OPTIONAL FEATURES\*

- Extra shelves
- Field reversible hinge kit for single door models (part # 146524)
- Pan slide rack (part # 146515)




Nor-Lake, Inc.  
 Registered to ISO 9001:2008  
 File No. 10001816


\* Most options are available two weeks from receipt of order. Please contact us for specific questions.

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


\*\* UL-Sanitation is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable NSF Standards.




NLF23-S Top View




NLF49-S Top View

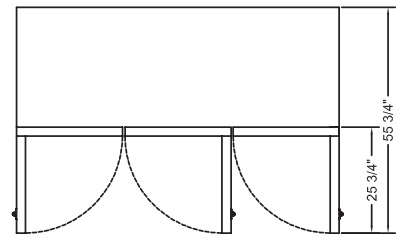


NLF72-S Top View

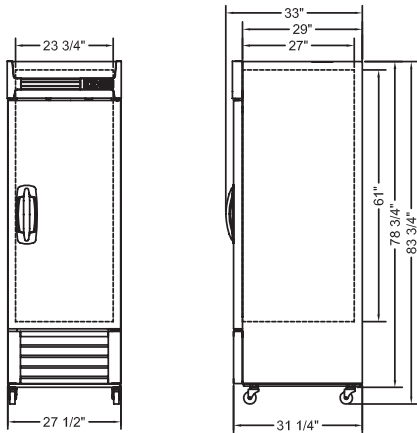

NLF23-S Front and Side Views

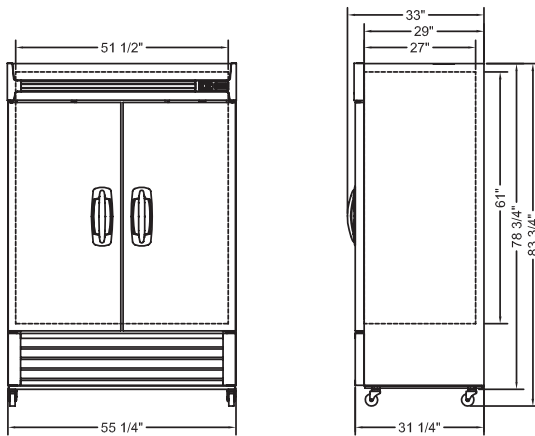

NLF49-S Front and Side Views

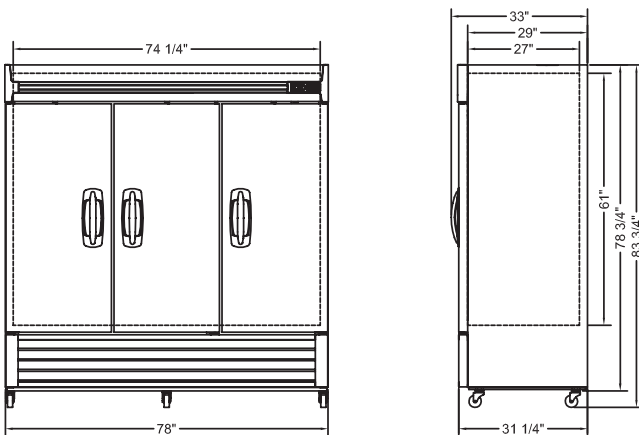

NLF72-S Front and Side Views

## SPECIFICATIONS

Models	NLF23-S	NLF49-S	NLF72-S
Crated Height	84-1/4"	84-1/4"	84-1/4"
Crated Width	29-1/8"	56-3/4"	78-3/8"
Crated Depth	33-1/2"	33-1/2"	33-1/2"
Crated Weight (lbs)	308	483	653
Interior Height (in)	61"	61"	61"
Interior Width (in)	23-3/4"	51-1/2"	74-1/4"
Interior Depth (in)	27"	27"	27"
Overall Height (in)*	83-3/4"	83-3/4"	83-3/4"
Overall Width (in)	27-1/2"	55-1/4"	78"
Overall Depth (in)	33"	33"	33"
Gross Cubage (ft. <sup>3</sup> )	23	49	70
Number of Shelves	4	8	12
Number of Casters	4	4	6
Condensing Unit Size	1/2 HP	3/4 HP	1.1 HP
Refrigerant	R-404a	R-404a	R-404a
Electrical Characteristics	115/60/1	115/60/1	115/208-230/60/1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	14-20P
Total Amp Draw	8.5	9.5	9.0

Specifications subject to change without notice.

\* The overall heights shown in the table and drawings are with casters.



**NORLAKE**<sup>®</sup>

Revision Date: 03/13  
 © 2013 NOR-LAKE, INC.  
 Printed in the U.S.A.  
 Part Number: 138687

**Standex**  
 Food Service Equipment Group