

Project	Quantity	Item #
Model Specified:		CSI Section 11400

### Reach-In Even-Thaw Refrigerator/ Self-Contained



Model RET232NUT-FHS

### Two Section Reach-In Models, 32" Deep



Stainless Exterior  
& Interior

Full Length Door Model RET232NUT-FHS  
Half Length Door Model RET232NUT-HHS

The R-Series "N-Width" reach-in Even Thaw Refrigerator is designed especially to thaw frozen food product under safe, temperature controlled conditions. It can be used to thaw both full or partial loads of frozen food product.

This model includes such high quality cabinet features as stainless steel exterior and interior construction, self-closing doors with a stay open feature, and is equipped standard with a full compliment of stainless steel tray slides to accommodate either: one (1) 18" x 26" or two (2) 14" x 18" pans per pair of tray slides.

### Standard Product Features

- Stainless Steel Exterior & Interior
- Special Refrigeration System/Air Flow Design Promotes Rapid, Safe Thawing Of Frozen Food Product
- Full or Half Length Stainless Steel Doors With Locks
- Self-Closing Doors With Stay Open Feature At 120 Degrees
- Guaranteed For Life Cam-Lift Hinges
- Guaranteed For Life Horizontal Work Flow Door Handle
- Stainless Steel Breaker Caps
- Twenty Eight (28) #1 Type Tray Slides 4" O.C. (14 per section)
- Automatic Non-Electric Condensate Evaporator
- Exterior Mounted Dial Thermometer
- Magnetic Snap-In EZ-Clean Door Gasket(s)
- Gasket-Protecting Metal Door Liner
- 9' Cord & Plug Attached
- Set Of Four (4) 6" High Adjustable Stainless Steel Legs
- Three Year Parts And Labor Warranty
- Five Year Compressor Warranty

### Options & Accessories

- Set of Four (4) 6" High Casters In Lieu of Legs
- Set of Four (4) 4-5/8" High Casters In Lieu of Legs
- 4-1/2" High Stainless Steel Base In Lieu of Legs
- 6" High Stainless Steel Kick Plate
- Stainless Steel Finished Back With Rear Louvers
- Plated Shelves To Fit Tray Slides
- Re-Hinging Feature
- Decorative Kool Klad Laminate Decor
- EZ-Open Foot Pedal (full height doors only)



Listed by Underwriters Laboratories Inc. and classified by Underwriters Laboratories in accordance with ANSI/NSF7.

Approval: \_\_\_\_\_



**TRAULSEN**  
4401 BLUE MOUND RD.  
PHONE 1 (800) 825-8220  
Website: www.traulsen.com

FT. WORTH, TX 76106  
FAX-MKTG. 1 (817) 624-4302

Project	Quantity	Item #
Model Specified:		CSI Section 11400

## Specifications

### Construction, Hardware and Insulation

Cabinet exterior, including front, one piece sides, louver assembly and doors are constructed of heavy gauge stainless steel. Cabinet interior and door liners are constructed of stainless steel. Exterior cabinet top, back and bottom are constructed of heavy gauge aluminized steel. A set of four (4) adjustable 6" high stainless steel legs are included.

Doors are equipped with removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature at 120 degrees. Guaranteed for life, work flow door handle is mounted horizontally over recess in door which limits protrusion from door face into aisle ways.

Gasket profile and Santoprene® material simplify cleaning and increase overall gasket life. Anti condensate heaters are located behind each door opening.

Cabinet and door contains high density, non-CFC, foamed in place polyurethane insulation.

### Refrigeration System

A top mounted, self-contained, balanced refrigeration system using R-404A refrigerant is conveniently located behind the one piece louver assembly. It features a plenum effect blower coil, large, high humidity evaporator coil located outside the food zone, and a top mounted non-electric condensate evaporator. Heaters and fans mounted in the mullion facilitate the Even-Thaw process. Standard operating temperature is 37 to 41°F.

### Interior

Standard interior arrangements include twenty eight (28) #1 tray slides 4" O.C., fourteen per section. Each pair of tray slides can accommodate either: (1) 18" x 26" or (2) 14" x 18" pans.

### Warranties

Both a three year parts and labor warranty and a five year compressor warranty (self-contained models only) are provided standard.



DIMENSIONAL DATA	RET232NUT
Net capacity cu. ft.	46.0 (1303 cu l)
Length - overall in.	52½ (132.4 cm)
Depth - overall in.	35 (88.8 cm)
Depth - over body in.	32 (81.3 cm)
Depth - with door open 90 degrees in.	55¾ (141.6 cm)
Clear door width in.	21½ (53.6 cm)
Clear full-door height in.	57½ (146.3 cm)
Clear half-door height in.	27½ (69.9 cm)
Height - overall on 6" legs <sup>3</sup>	83¼ (211.5 cm)
Pan Capacity - 18" x 26"	28
Pan Capacity - 14" x 18"	56
Net Wt. lbs.	560 (254 kg)
ELECTRICAL DATA	
Voltage	115/60/1
Feed wires with Ground	3
Full load amperes	16.0
REFRIGERATION DATA	
Refrigerant	R-404A
BTU/HR H.P. <sup>2</sup>	4240 (1/2 HP)

### NOTES


NOTE: Figures in parentheses reflect metric equivalents.

- 1= Wattage is determined by listed amps X listed volts X an average run time of 70% for refrigerators and 80% for freezers.
- 2= Based on a 90 degree F ambient and 20 degree F evaporator.
- 3= 12" Top clearance preferred for optimum performance and service access.

Plan - RET232NUT



Elevation - RET232NUT

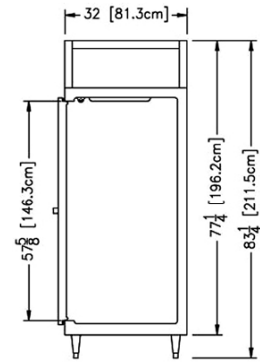

Section - RET232NUT



Uses One NEMA 5-20 P Plug

Full load amps and plug style may vary depending on electrical options chosen and condensing unit employed.

NOTE: When ordering please specify: Voltage, Hinging, Door Size, Options and any additional warranties.

Continued product development may necessitate specification changes without notice.

Part No. TR35805 (revised 7/13)

TRAUlsen  
4401 BLUE MOUND RD.  
PHONE 1 (800) 825-8220  
Website: www.traulsen.com

FT. WORTH, TX 76106  
FAX-MKTG. 1 (817) 624-4302

**Traulsen**