



STAINLESS STEEL  
**DROP-IN SINKS**  
 Two Compartments - FOR GENERAL PURPOSE USE

**NSF** NOTE: Multi-Compartment Drop-In Sinks ARE NSF Approved when used in Mobile Food Carts and Kiosks only.

Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_  
 Model #: \_\_\_\_\_  
 Project #: \_\_\_\_\_

**FEATURES:**

One piece seamless **Deep Drawn** sink bowl design.  
 All sink bowls have a large liberal radii with a minimum dimension of 2" and are rectangular in design for increased capacity.  
 Self-Rim Design. Mounting clips provided and accomodate counters up to 2" thick. (Quantity supplied varies based on drop in sink ordered).  
 Includes 4" O.C. **K-50** faucet & basket drain.

**CONSTRUCTION:**

Bowls fabricated from one sheet of stainless steel.  
 All bowls are Sound Deadened.  
 Units feature Advance Tabco's **Smart Finish™**.

**MECHANICAL:**

Faucet supply is 1/2" IPS male thread.  
 Deck mounted faucets are furnished with aerator.

**MATERIAL:**

18 gauge type 304 series stainless steel.  
 Faucets are brass-nickel plated.  
 Stainless Steel 1-1/2" IPS basket drain.



DI-2-10



DI-2-2012



DI-2-1410



DI-2-208



STANDARD MOUNTING CLIPS  
 Accomodates Countertops up to 2"  
 Replacement # K-28 (Per Sink)

Available Faucets & Accessories	Model #	Qty
Deck Mounted 8" Swing Spout. 4" O.C.	K-50	
Deck Mounted 12" Swing Spout. 4" O.C.	K-53	
Deck Mounted 8 1/2" Gooseneck. 4" O.C.	K-55	
Deck Mounted Swing w/Spray. 8" O.C.*	K-58	
Thick-Counter Mounting Clips for Countertops over 7/8" and up to 2". (Qty. supplied varies based on sink ordered)	K-28	

\*REQUIRES K-472 FAUCET HOLE REVISION

**Standard Faucet conforms to NSF 61 Standard 9. An optional faucet upgrade is required for compliance to AB 1953 Standards.**

For Replacement Faucets & Upgrades, Drains & Accessories visit our website at [www.advancetabco.com](http://www.advancetabco.com)

<p>ADVANCE TABCO          SMART FABRICATION™  <a href="http://www.advancetabco.com">www.advancetabco.com</a></p>	<b>Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.</b> Email Orders To: <a href="mailto:customer@advancetabco.com">customer@advancetabco.com</a> . For Smart Fabrication™ Quotes, Email To: <a href="mailto:smartfab@advancetabco.com">smartfab@advancetabco.com</a> or Fax To: 631-586-2933		
	<b>NEW YORK</b> Fax: (631) 242-6900	<b>GEORGIA</b> Fax: (770) 775-5625	<b>TEXAS</b> Fax: (972) 932-4795


# DIMENSIONS and SPECIFICATIONS

TOL ± .125"


Supplied with K-50 Faucet & K-6 Basket Drain

ALL DIMENSIONS ARE TYPICAL

DI-2-10

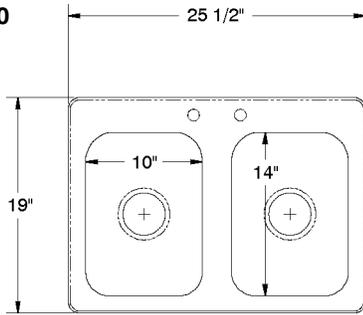


**Cut-Out Size**  
24 3/4" X 18 1/4"  
1 1/4" radius corners

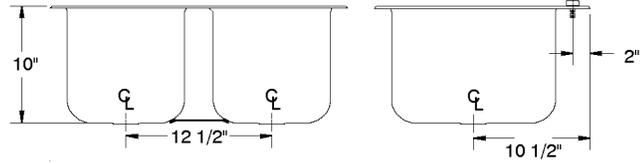


Faucet

Approx. Wt. 26 lbs.

DI-2-1410

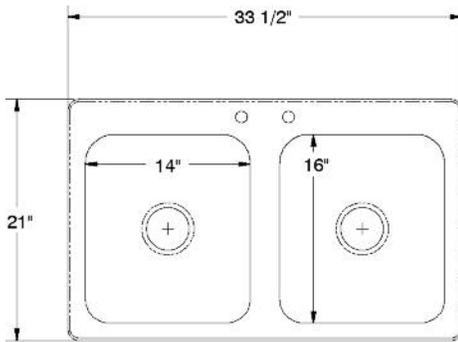

**Cut-Out Size**  
32 3/4" X 20 1/4"  
1 1/4" radius corners


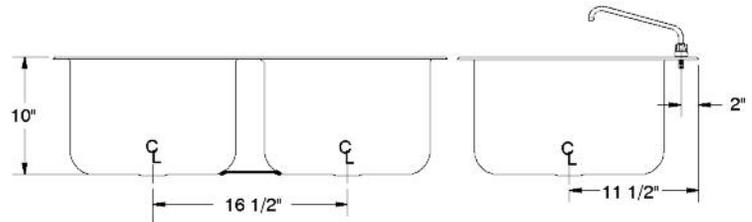


Approx. Wt. 35 lbs.


DI-2-208 & DI-2-2012

**Cut-Out Size**  
44 3/4" X 20 1/4"  
1 1/4" radius corners

TOP VIEW

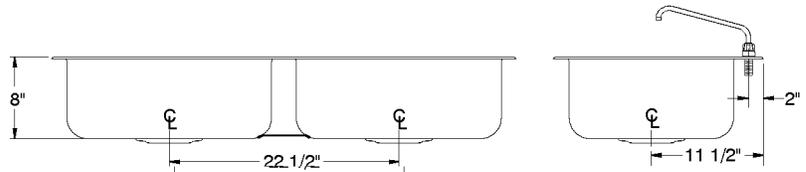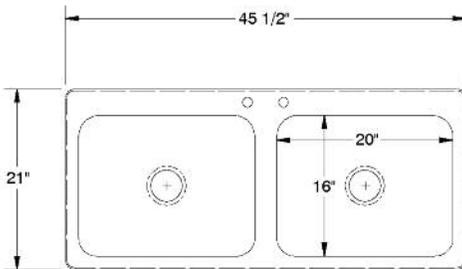

Approx. Wt. 38 lbs.

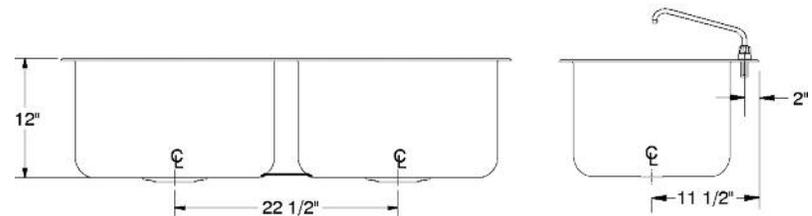

Approx. Wt. 42 lbs.

## TYPICAL INSTALLATION

Cut-Out Size = L to R x F to B

