



HEAVY DUTY REFRIGERATED COLD WELL TABLES WITH ENCLOSED BASE



HDRCP-3-BS Shown



Item #: _____ Qty #: _____
Model #: _____
Project #: _____

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

FEATURES:

Heavy duty construction
All welded 300 series stainless steel
High nominal cooling capacity. (1500 btuh) for guaranteed product temperature control
Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area
This increases operating efficiency and reduces power consumption
Expansion valve for efficient operation at various temperature conditions
Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit
Sight glass to insure a properly charged refrigeration system
Liquid receiver for improved refrigerant charge control
Low running current suitable for any 115 volt circuit
Precision electronic thermostat for exact temperature control
Switched 115 VAC receptacles to power condensing unit and remote ventilation fan. (optional)
Uses standard 12" x 20" pans, and smaller pans with the use of adapter bars

For Mobile Units:

SU-25 - 5" swivel casters, two with brakes
Universal mount push handle (right/left) on mobile units

MATERIAL:

TOP: 18 gauge, #304 stainless steel, with black polyethylene thermal breaker marine edge

BODY: 18 gauge #304 stainless steel

LINER: Constructed of 18 gauge, 304 stainless steel, with 3" recessed top, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a 1/4" radius. Liner is pitched towards a 1" I.P.S. drain

LEGS: 16 gauge stainless steel with full adjustable non-marking tip bullet foot

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R404-A refrigerant

ELECTRICAL:

Unit will be wired for 15 amps, 120V single phase operation with an on/off thermostat switch

2-3 well Units: 115 V, 8 AMPS, 60 Hz, 1/4 HP

4-6 well Units: 115 V, 8 AMPS, 60 Hz, 1/3 HP

Includes 6 ft. long, 3 wire cord with a NEMA 5-15P plug

Model	Length (L)	Width	Drain Distance (A)	Refrigerant	Wt (lbs.)	Cu. Ft.
HDRCP-2-BS	31.8125"	28.25"	27.35"	R404-A	320	24
HDRCP-3-BS	47.125"	28.25"	42.625"	R404-A	420	36
HDRCP-4-BS	62.50"	28.25"	57.975"	R404-A	510	50
HDRCP-5-BS	77.75"	28.25"	73.25"	R404-A	568	62
HDRCP-6-BS	93.125"	28.25"	98.50"	R404-A	633	74



NEMA PLUG 5-15P

OPTIONAL CASTERS

Visit our website for additional Food Table Accessories



SU-26



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:


Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL $\pm .125"$

ALL DIMENSIONS ARE TYPICAL

SIDE VIEW

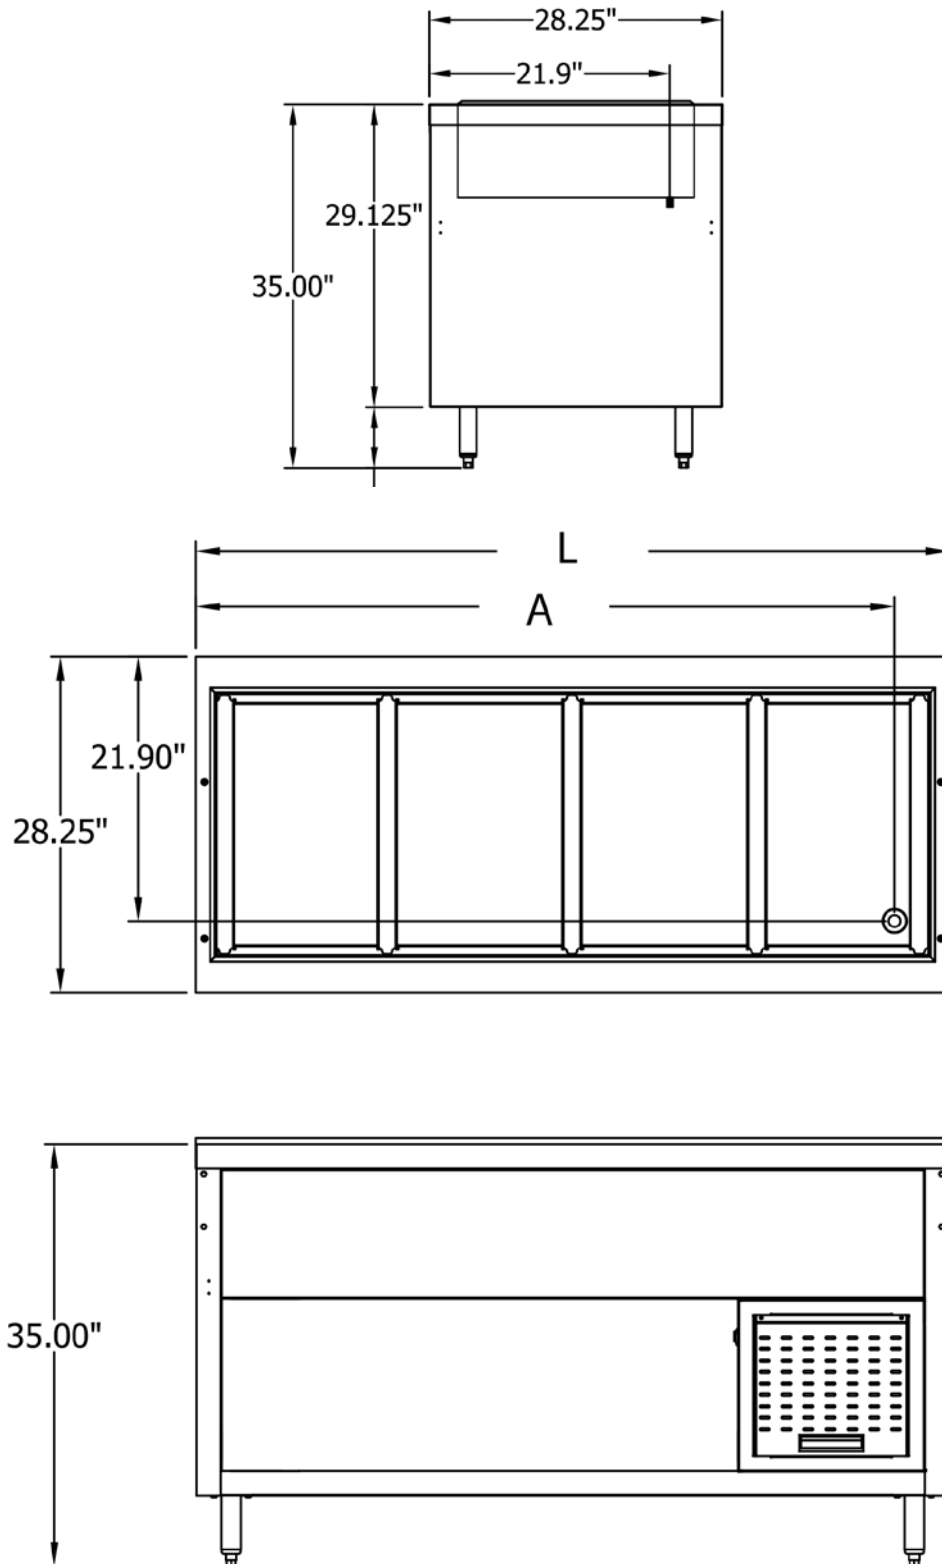

REF-V

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, OCTOBER 2014