



**TFMS Series  
w/ Open Base**



**TFMSU Series  
w/ Adjustable Undershef**

**Item #:** \_\_\_\_\_ **Qty #:** \_\_\_\_\_

**Model #:** \_\_\_\_\_

**Project #:** \_\_\_\_\_

**FEATURES:**

TOP is furnished with 1 5/8" sanitary rolled rim edge in front. Square edges on sides and 1/12" splash of single metal thickness on rear.

Hat channels stud welded to top which reinforces and maintains a level working surface.

Welded Front to Back Leg Assembly.

Rear (Left to Right) Stretcher bolts to side leg assemblies.

Aluminum die cast "leg-to-shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts. Undershef is fully adjustable.

**CONSTRUCTION:**

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.

**MATERIAL:**

**TOP:** 16 gauge stainless steel type "304" series.

**SHELF:** 16 gauge stainless steel type "304" series.

**STRETCHERS:** 1 5/8" diameter tubular stainless steel.

**LEGS:** 1 5/8" diameter tubular stainless steel.

Stainless steel gussets.

1" stainless steel bullet feet.

**OPEN BASE**

Model #	Width	Length	Wt.
TFMS-182	18"	24"	35 lbs.
TFMS-180	18"	30"	38 lbs.
TFMS-183	18"	36"	51 lbs.
TFMS-152	15"	24"	25 lbs.
TFMS-150	15"	30"	33 lbs.
TFMS-153	15"	36"	41 lbs.
TFMS-122	12"	24"	22 lbs.
TFMS-120	12"	30"	30 lbs.
TFMS-123	12"	36"	39 lbs.

**ADJUSTABLE UNDERSHELF**


Model #	Width	Length	Wt.
TFMSU-182	18"	24"	38 lbs.
TFMSU-180	18"	30"	41 lbs.
TFMSU-152	15"	24"	28 lbs.
TFMSU-150	15"	30"	36 lbs.

# DIMENSIONS and SPECIFICATIONS

TOL  $\pm$  .500"

ALL DIMENSIONS ARE TYPICAL

## TFMS Series w/ Open Base

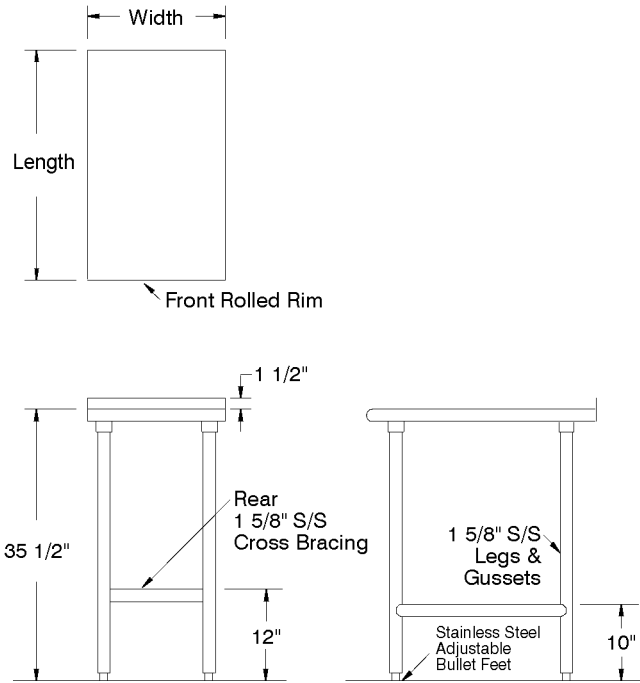

## TFMSU Series w/ Adjustable Undershelf

