



STAINLESS STEEL  
**WALL MOUNTED  
 SERVICE SINKS**

**12" Deep Bowl**



**WSS-14-21**



**WSS-16-25**

*Item #:* \_\_\_\_\_ *Qty #:* \_\_\_\_\_  
*Model #:* \_\_\_\_\_  
*Project #:* \_\_\_\_\_

**TUBULAR  
 Wall Brackets**

**FEATURES:**

Heavy Duty square design stainless steel.  
 Full 10" high backsplash.  
 Tubular stainless steel brackets for extra vertical support.  
 Stainless steel "Z" bracket.

**CONSTRUCTION:**

All TIG welded.  
 Welded areas blended to match adjacent surfaces and to a satin finish.  
 Die formed tubular wall bracket.

**MECHANICAL:**

Faucet holes are 8" O.C. (Faucet hole revisions available).  
 Faucets not included (See accessories).  
 Cast iron "P" trap not included (Supplied by others).  
 3-1/2" stainless steel basket drain.

**WSS-14-21:** Sink bowl is 18"L x 14"W x 12"D.

**WSS-16-25:** Sink bowl is 22"L x 16"W x 12"D.

**MATERIAL:**

All 16 gauge type 304 series stainless steel.  
 1-5/8" tubular stainless steel wall brackets.  
 Stainless steel gussets.



K-240



K-101



K-121



K-175



7-PS-32



7-PS-39

Accessories	Model #	Qty
<b>Service Faucet</b>	<b>K-240</b>	
<b>8" Swing Spout Faucet</b>	<b>K-101</b>	
<b>Gooseneck Faucet</b>	<b>K-121</b>	
<b>Electronic Faucet</b>	<b>K-175</b>	
<b>Knee Valve Assembly</b>	<b>7-PS-32</b>	
<b>Foot Pedal Assembly</b>	<b>7-PS-39</b>	

**Standard Faucet conforms to NSF 61 Standard 9. An optional faucet upgrade is required for compliance to AB 1953 Standards.**

For Replacement Faucets & Upgrades, Drains & Accessories visit our website at [www.advancetabco.com](http://www.advancetabco.com)



**Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.**

Email Orders To: [customer@advancetabco.com](mailto:customer@advancetabco.com). For Smart Fabrication™ Quotes, Email To: [smartfab@advancetabco.com](mailto:smartfab@advancetabco.com) or Fax To: 631-586-2933

**NEW YORK**  
 Fax: (631) 242-6900

**GEORGIA**  
 Fax: (770) 775-5625

**TEXAS**  
 Fax: (972) 932-4795

**NEVADA**  
 Fax: (775) 972-1578


# DIMENSIONS and SPECIFICATIONS

TOL  $\pm$  .500"

FITTINGS SUPPLIED AS SHOWN


ALL DIMENSIONS ARE TYPICAL

WSS-14-21

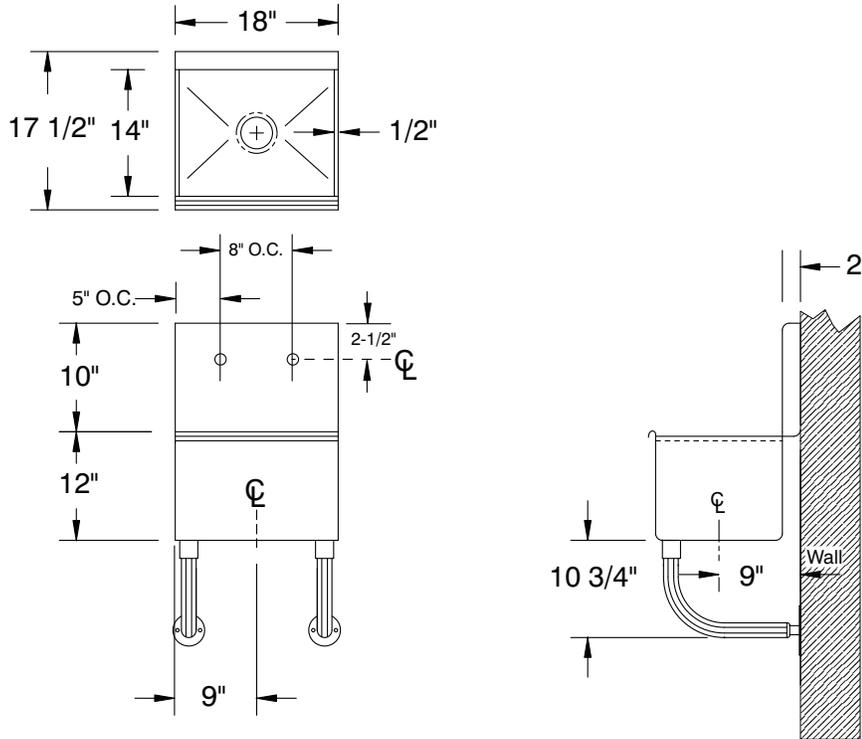

45 lbs.

WSS-16-25

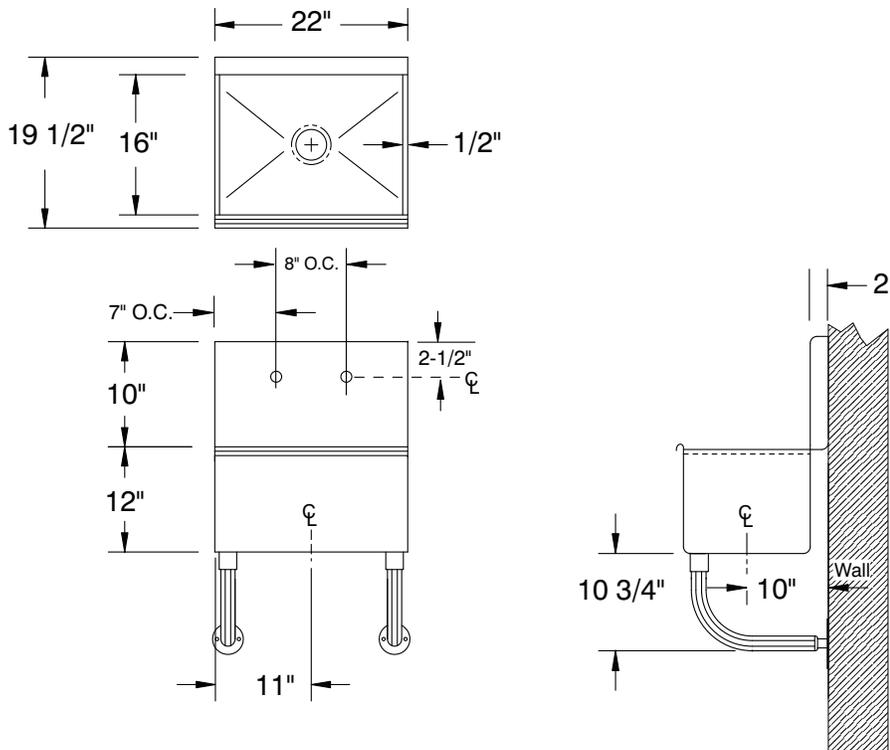

52 lbs.

