1000-MH2-1

HOT HOLDING CABINET







ecosmart • Holds pre-plated food fresh, flavorful and hot.

- Full perimeter bumper, flush transport handles, heavy duty casters along with the cart's reduced height provide easy mobility.
- A helicoil power cable keeps the power cord is out of the way during transportation.
- Stainless steel surfaces resists corrosion.
- Easy to clean interior and base.
- Full access front gives the operator 1300 mm of clear, unobstructed storage.
- All mechanical equipment is easily accessible for ease in servicing.
- Electronic LED digital display monitors inside air temperature.
- Non-tilt pan slides.

Stainless steel exterior and door is fully insulated with 60mm of polyurethane. Self-closing lockable door is hinged right as standard and includes a removable magnetic door gasket. The cart is supplied with thirty (30) sets of non-tilt pan slides, and removable humidity tray.

Cart is factory preset to operate between 78°C and 82°C. A LED display monitors the inside temperature. Cart generates 7000 BTU/h. Audio visual temperature alarms are included as standard, along with HACCP capability. Unit includes a full-perimeter bumper guard, two (2) flush transport handles on each end of the cart, and four (4) heavy duty swivel casters — two (2) with brake.

□ **MODEL 1000-MH2-1** - Single compartment hot holding cabinet

( (

## FACTORY INSTALLED OPTIONS

- Electrical
- □ 220V
- Door swing option
  - □ Right-hand door, standard
  - □ Left-hand door, optional




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



## 1000-MH2-1 HOT HOLDING CABINET

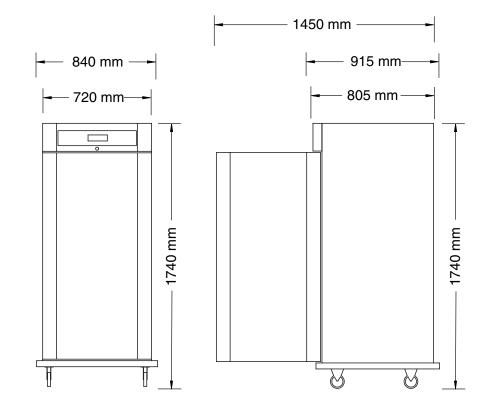

INSTALLATION REQUIREMENTS		DIMENSIONS: H x W x D				
<ul> <li>Cart must be installed level.</li> <li>Cart must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.</li> </ul>		EXTERIOR:		m x 840 mm x x 670 mm x 1	<u> </u>	
CLEARANCE REQU	JIREMENTS	]				
Full perimeter bumper accommodates all clearance requirements.		ELECTRIC VOLTAGE	AL PHASE	CYCLE/HZ	AMPS	kW
		220	1	50/60	9.5	2.2
WEIGHT	CORD INCLUDED (3.5M)					
NET: 110 kg	<b>SHIP:</b> 135 kg					
CARTON DIMENSIONS:	(L X W X H)					
940 mm x 860 mm x 1860 mm		PRODUCT\PAN CAPACITY				
	131 kg maximum					
OPTIONS & ACCE	VOLUME MAXIMUM: 228 LITERS					
□ Shelves, Stainless S		GASTRONORM 1/1:				
2/1 GN (650mm x 530mm) CONTACT FACTORY		Thirty (30) 530 mm x 325 mm x 65 mm				



 W164 N9221 Water Street
 P.O. Box 450
 Menomonee Falls, Wisconsin 53052-0450
 U.S.A.

 PHONE: 262.251.3800
 800.558.8744 U.S.A./CANADA
 FAX: 262.251.7067
 800.329.8744 U.S.A. ONLY

www.alto-shaam.com

