


# 200-HWLF SERIES



Pans not included

- ecosmart The gentle heating capability of HALO HEAT significantly extends hot food holding life without continuing the cooking process.
  - Provides a more appealing product with better appearance and fresher taste.
  - Front-of-the-house use with an existing counter, overhead lighting, and sneeze guard system or drop into a prep table for hot food plating convenience.
  - Easy drop-in installation without the need of water or drainage connections and the related installation and water usage costs.
  - Maintenance savings with the elimination of lime and scale buildup associated with steam table holding.
  - Increase employee safety with the elimination of burning steam when changing pans.
  - Adjustable thermostat with remote control suitable for mounting provides holding temperature flexibility without high steam table temperatures to scorch or burn.
  - Large flange construction matches our cold well series for a coordinated line up.



The heated well base is available in two depths. The 4-3/8" (111mm) deep unit holds 4" (102mm) deep pans and the 6-3/8" (162mm) deep unit holds 6" (153mm) deep pans. Both units will hold a combination of standard (gastronorm) pan sizes. The hot well includes one (1) full-size pan divider bar and four (4) half/third-size pan divider bars.

	MODEL	200-HWLF	<b>/D4:</b> 4-3/	8" (	(111mm) d	lepth, acce	pts two (	2)	full	-size (	(gastronorm)	pans
--	-------	----------	------------------	------	-----------	-------------	-----------	----	------	---------	--------------	------

☐ MODEL 200-HWLF/D6: 6-3/8" (162mm) depth, accepts two (2) full-size (gastronorm) pans





#### **FACTORY INSTALLED OPTIONS**

**Electrical Choices:** 

□ 120V

□ 208-240V


□ 230V



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY



## HOT FOOD DROP-IN WELL 200-HWLF SERIES

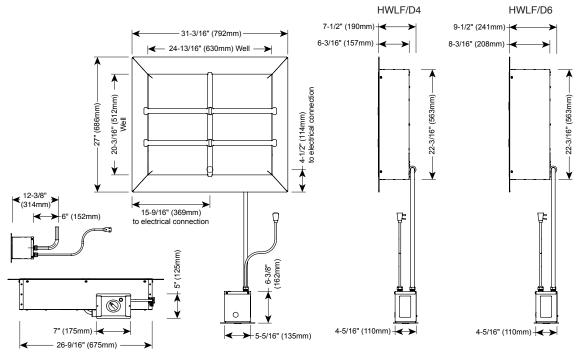

ELECTRICAL							
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW PLUG CONFIG.			
120	1	50/60	10.6	1.3 NEMA 5-15P			
				15A-125V PLUG			
208	1	50/60	4.6	1.0 NEMA 6-15P			
240	1	50/60	5.3	1.3 O 15A-250V PLUG			
230	1	50/60	5.1	1.2 CEE 7/7			
				220-230V PLUG			

#### HWLF/D4 DIMENSIONS: HXWXD

**EXTERIOR:** 

7-1/2" x 31-3/16" x 27" (190mm x 792mm x 686mm)

INTERIOR HOT WELL DIMENSION:

4-3/8" x 24-3/16" x 20-3/16" (111mm x 630mm x 512mm)

COUNTER CUTOUT DIMENSION:

27" x 22-1/2" (686mm x 572mm)

CONTROL BOX CUTOUT REQUIRED:

4-1/2" x 5-1/4" x 12-3/8" (114mm x 133mm x 314mm)

#### HWLF/D6 DIMENSIONS: HXWXD

EXTERIOR:

9-1/2" x 31-3/16" x 27" (241mm x 792mm x 686mm)

INTERIOR HOT WELL DIMENSION:

6-3/8" x 24-3/16" x 20-3/16" (162mm x 630mm x 512mm)

COUNTER CUTOUT DIMENSION:

27" x 22-1/2" (686mm x 572mm)

CONTROL BOX CUTOUT REQUIRED:

4-1/2" x 5-1/4" x 12-3/8" (114mm x 133mm x 314mm)

#### **CLEARANCE REQUIREMENTS**

4" (152mm) from bottom

PRODUCT\PAN CAPACITY (BASED ON 4" DEEP PANS)				
48 lb (21.6 kg) maximum				
мах. volume: 30 qt (38 L)				
FULL-SIZE PANS*:	Two (2) 12" x 20" x 4"			
	GN 1/1 (325mm x 530mm x 102mm)			
HALF-SIZE PANS*:	Four (4) 12" x 10" x 4"			
	GN 1/2 (325mm x 265mm x 102mm)			
THIRD-SIZE PANS*:	Six (6) 12" x 6" x 4"			
	GN 1/3 (325mm x 176mm x 102mm)			

\*WILL ALSO ACCEPT 2-1/2" (65mm) DEEP PANS; D6 UNITS WILL ACCEPT 6" (153mm) DEEP PANS

#### **INSTALLATION REQUIREMENTS**

Unit must be installed level and must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Hot well outer walls can reach 200° to 260°F (93° to 127°C). Verify countertop material temperature rating with manufacturer before installing hot well to ensure countertop can withstand heat.

WEIGHT EST.	/D4	/D6			
NET WEIGHT:	74 lb (34 kg)	79 lb (36 kg)			
SHIP WEIGHT:	100 lb (45 kg)	110 lb (50 kg)			
CRATE DIMENSIONS:	37" x 33" x 15"				
(L X W X H)	(940mm x 838mm x 381mm)				

### **OPTIONS & ACCESSORIES** PAN DIVIDER BARS



#08H - 05/13

W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY