





- Battery companion for ASF-60 or ASF-75 gas and electric fryers or stand-alone dump station
- Maintenance free overhead 1,000 watt infrared warmer
- Stainless steel front and sides
- Removable 1/3 size pan to collect crumbs
- Four leveling casters
- Bank individual fryers, dump stations, and utility cart side by side with gap cover strips.
- One year parts and labor warranty

The Alto-Shaam ASF-60DS dump station is constructed of stainless steel and includes front and rear-mounted, heavy duty leveling casters. An overhead infrared heating element is controlled with one (1) ON/OFF power switch. Holding well includes a screen insert to collect crumbs and small bits of product in a removable catch pan located behind the door. Stand-alone dump station or battery companion for gas or electric fryers. Unit can be banked to the right, left, or between fryers. Must be placed on far left or right when included in a battery configuration.

# ☐ ASF-60DS Fryer Dump Station





### **FACTORY INSTALLED OPTIONS**

- **⇒** Specify Voltage:
  - □ 120
  - $\square$  230
- ☐ ASF-60 Fryer Dump Station Battery
  - ➡ Create a battery of multiple ASF-60E, ASF-60G fryers, ASF-60DS dump stations, and ASF-60UC utility cart in any combination of up to four (4) units. Must order a minimum of two units. Units sold separately.
  - Battery configuration includes oil filtration system.
     Specify right- or left-side placement when ordering.




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY





# ASF-60DS FRYER DUMP STATION

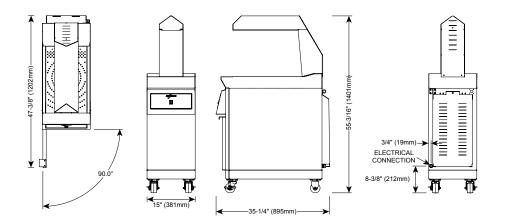

**CAPACITY** 

EL ECTRICAL

18 lb (8.2 kg) MAXIMUM

## **DIMENSIONS** EXTERIOR H x W x D:

55-3/16" x 15" x 35-1/4" (1401mm x 381mm x 895mm)

36-11/16" (931mm) unit height without infrared warmer

WEIGHT EST.	NET WEIGHT	SHIP WEIGHT
	CONTACT FACTORY	CONTACT FACTORY
CARTON DIMENS	IONS: CO	NTACT FACTORY

# **INSTALLATION REQUIREMENTS**

Dump station must be installed level.

# **CLEARANCE REQUIREMENTS**

BACK: 6" (152mm) FRONT: 25" (635mm)

ELECTRICAL								
VOLTAGE	EPHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG			
120	1	60	8.3	1.0	NEMA 5-15P 15A-125V PLUG			
					40" (1016mm) cord			
230	1	50	4.3	1.0	CEE 7/7			

OPTIONS

☐ Banking Strip (1 strip req'd for every 2 banked units) 1013504



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

3 16A-250v plug 40" (1016mm) cord