



HFM-24 HFM-30 HFM-48 HFM-72

• HALO HEAT . . . a controlled, uniform heat source that radiates a gentle heat from the shelf base.

- Front-of-the-house use with an existing counter, overhead lighting, and sneeze guard system, or drop into a prep table for hot food plating convenience.
- Combine the beauty and durability of customer supplied solid surface material for an impressive display of hot food products.
- Perfect for hot hors d'oeuvres or pizza.
- Easy drop-in installation design.
- Stainless steel exterior panels.

Exterior side panels of 18 gauge stainless steel. An ON/OFF thermostat control is attached to the heated base with a 30" (762mm) flexible, water-tight extension for built-in installations and can be mounted in a convenient location for the operator. The hot food module is controlled by one (1) ON/OFF switch and one (1) adjustable thermostat with a range of 1 through 10 with one (1) indicator light. Customer supplied solid surface material insert provides even heat transfer to hot foods being held in direct contact with the heated surface.

☐ MODEL HFM-24 - 24" (610mm) wide	
☐ MODEL HFM-30 - 30" (762mm) wide	
☐ MODEL HFM-48 - 48" (1219mm) wide	
☐ MODEL HFM-72 - 72" (1829mm) wide	_







FACTORY INSTALLED OPTIONS

• Voltage Choices

 $\square \ 208V$

□ 230V




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY



HFM-24, HFM-30, HFM-48, HFM-72

HOT FOOD MODULE

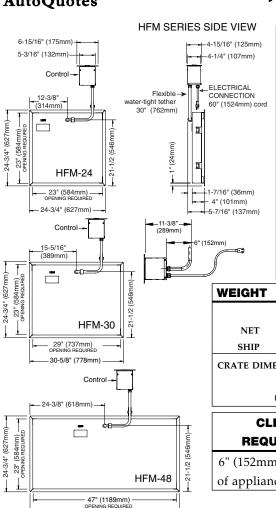

DIMENSIONS: L x W x D

HFM-24 Exterior: 24-3/4" x 24-3/4" x 5-7/16" (627mm x 627mm x 137mm) surface material: 22-3/8" x 22-3/8" x 3/4" (568mm x 568mm x 19mm) opening required: 23" L x 23" W (584mm x 584mm)

HFM-30 Exterior: 30-5/8" x 24-3/4" x 5-7/16" (778mm x 627mm x 137mm) surface material: 28-3/8" x 22-3/8" x 3/4" (721mm x 569mm x 19mm) opening required: 29" L x 23" W (737mm x 584mm)

HFM-48 Exterior: 48-3/4" x 24-3/4" x 5-7/16" (1237mm x 627mm x 137mm) surface material: 46-3/8" x 22-3/8" x 3/4" (1178mm x 569mm x 19mm) opening required: 47" L x 23" W (1189mm x 584mm)


HFM-72 Exterior: 72-3/4" x 24-3/4" x 5-7/16" (1847mm x 627mm x 137mm) surface material: 70-3/8" x 22-3/8" x 3/4" (1788mm x 569mm x 19mm) opening required: 71" L x 23" W (1798mm x 584mm)

CONTROL BOX CUTOUT REQUIRED: 4-1/2" x 5-1/2" x 11-3/8" (115 x 140 x 289mm)

	HFM-24	HFM-30	HFM-48	HFM-72
NET	39 lb (18 kg)	39 lb (18 kg)	60 lb (27 kg)	88 lb (40 kg)
SHIP	104 lb (47 kg)	104 lb (47 kg)	130 lb (59 kg)	175 lb (79 kg)
CRATE DIN	MENSIONS: (L X W X H)			
	36" x 36" x 17"	36" x 36" x 17"	60" x 34" x 13"	79" x 34" x 13"
	(914 x 914 x 432mm)	(914 x 914 x 432mm)	(1524 x 864 x 330mm)	(2007 x 864 x 330mm)

CLEARANCE REQUIREMENTS

6" (152mm) from bottom of appliance.



INSTALLATION REQUIREMENTS

- Unit must be installed level.
- It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Customer supplied solid surface material must be rated to withstand temperatures at 300°F (148°C) or above. Material must be 3/4" (19mm) thickness, 3/8" (10mm) radius corners and 1/8" top and bottom edge. Edges must be polished. Contact Alto-Shaam for additional information.

HFM-24					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	кW	
208	1	60	3.2	0.65	NEMA 6-15P 15A, 250V PLUG
230	1	50/60	3.4	0.78	CEE 7/7* 220-230V PLUG
HFM-30					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	кW	
208	1	60	3.2	0.65	NEMA 6-15P 15A, 250V PLUG
230	1	50/60	3.4	0.78	CEE 7/7* 220-230V PLUG
HFM-48					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	кW	
208	1	60	6.4	1.3	NEMA 6-15P 15A, 250V PLUG
230	1	50/60	7.1	1.6	CEE 7/7* 220-230V PLUG
HFM-72					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	кW	
208	1	60	9.7	1.99	NEMA 6-15P 15A, 250V PLUG
230	1	50/60	10.6	2.4	BARE END, NO PLUG

^{*}Other international plugs are available, contact factory for more information.

OPTIONS & ACCESSORIES

 \square Cutting Board (for placement on top of surface material) BA-2054 24" (610mm) H x 18" (470mm) W x 1/2" (13mm) D



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

