

# The Ultimate Outdoon Broiler

## OUTDOOR CHAR BROILERS



Model CBBQ-60S-CP with optional 30" in-line griddle plate

## **SPECIFICATIONS**

The Ultimate Outdoor Char Broilers are designed for broiling, grilling, steaming, roasting and holding all in a single piece of equipment.

CBBQ models feature 30" wide (762mm) or 60" wide (1524mm) by 24" deep (610mm) broiling areas. All models come standard with an all stainless steel exterior, an 8" deep (203mm) stainless steel work deck, stainless steel valve panel, stainless steel water/grease pans, heavy-duty nickel-chrome plated removable top grates.

**Built-in models** come with front removable water/grease pans and roll-top hood(s).

Base models come with stainless steel stand, legs, casters (two with locks) 3-channel stabilizer frame included on 60" mobile models.

*Packages* also include mobile tank caddy and 40 lb. L.P. tank(s).

**Complete Packages** also include the customer's choice of roll-top hood(s) or wind & splash guard(s).

20,000 BTUH steel burners are located every 7" (178mm) for maximum top heat intensity and greater production with independently controlled, adjustable burner valves for precision control and energy efficiency.

Standard crossover pilot tube system provides additional safety, energy savings and ease of operation.

Exteriors are fabricated of heavy gauge type 430 stainless steel with a #4 finish. Interiors are fabricated of 18-gauge high-heat resistant aluminized steel. Overall exterior dimensions are 33 1/2" deep (826mm) and either 32" (813mm) or 62 1/2" (1588mm) wide. Height is 36" (915mm) overall including stand, legs and casters.

One (1) year limited parts and labor warranty included.

Job	Item #
000	100111 //

## GAS CHAR BROILERS



BUILT-IN MODELS	BASE MODELS
CBBQ-30S-BI	CBBQ-30S
CBBQ-60S-BI	CBBQ-60S
PACKAGES	COMPLETE PACKAGES
CBBQ-30S-P	CBBQ-30S-CP
CBBQ-60S-P	CBBQ-60S-CP

#### STANDARD FEATURES

20,000 BTUH steel burners every /" (1/8mm) with
independently controlled, adjustable valves for each burner
Up to 160,000 BTUH per broiler in natural or LP gas
Crossover pilot tube system

_			,		
	Stainless	steel	radiant	heat	defectors

Heavy-duty	/ nickel-chrome	plated to	op grates

	Stainless	steel	valve	pane
--	-----------	-------	-------	------

	Stainless	steel	outer	construction
_	Otalillood	01001	outor	Contotiaction

3-channel	stabilizer	frame	standard	on	60"	model;	optional	01
30" model								

## **OPTIONS & ACCESSORIES**

Smoke & Roast roll-top	hoods	in 30"	(762mm)	or	60"
(1524mm) sizes					

\/\/ind	& Snlash	quards in	30"	(762mm)

- Stainless steel undershelves
- Ritchlite cutting boards in 30" (762mm) or 60" (1524mm) sizes for front-mounted work decks
- □ 11" Wide (279mm) removable griddle plate
- □ 30" Wide (762mm) In-Line griddle plate
- All weather covers
- Propane tank caddies
- ☐ 3-channel stabilizer frame for 30" models
- ☐ 40 lb. LP tanks with hoses
- Built-in version


## **CERTIFICATIONS**







<sup>☐</sup> Limited one year part & labor warranty

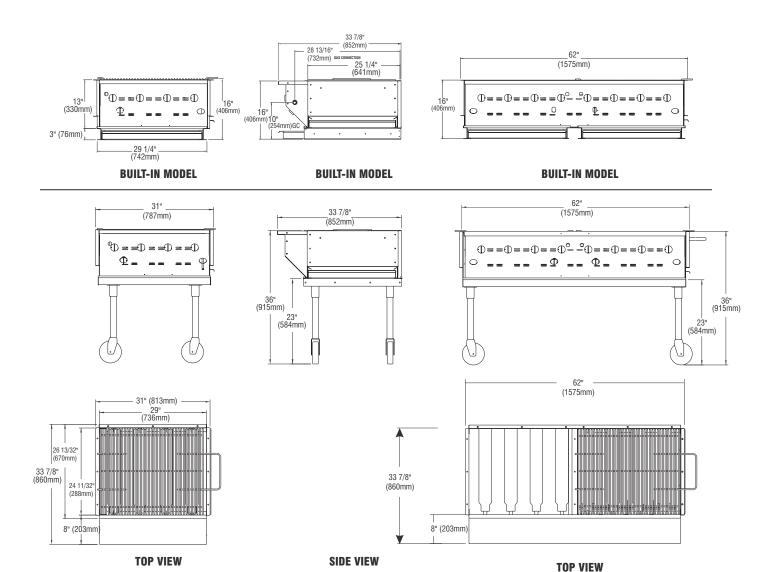

## ALL DIMENSIONS NOMINAL

SHIPPING	INFOR	MATIC	N								
	Shipping	y Weight			Carton	Dimensio	ns		Crate	Size	
Model	Lbs.	Kilos	Wi Inches	dth mm	De Inches	pth mm	Hei Inches	ght mm	Cubic Feet	Cubic Meter	
CBBQ-30	300	136	33	838	30	762	19	483	10.8	.30	
CBBQ-60	500	227	63	1600	30	762	19	483	20.8	.58	

Model	GAS TYPE	BTUH	KW	CONNECTION	# of CONNECTIONS
CBBQ-30	LP	80,000	23.44	3/8"	1
CBBQ-30	natural	80,000	23.44	3/4"	1
CBBQ-60	LP	160,000	46.88	3/8"	2
CBBQ-60	natural	160,000	46.88	3/4"	1

SPECIFICATIONS										
	Broiling Area		# Top	# of	Overall Dimensions*					
Model	in.	mm	Grates	Burners	Width		Depth		Height	
Model					Inches	mm	Inches	mm	Inches	mm
CBBQ-30	29 x 24	736 x 610	1	4	31	813	33 7/8	860	36	915
CBBQ-60	58 x 24	1473 x 610	2	8	62	1575	33 7/8	860	36	915

\*Height includes stand & legs