



Model COC-E1 shown with left hand hinge & right side controls

SPECIFICATIONS

Half-size electric, forced air, single and double stack convection type oven. Standard specifications include 9.5 KW per cavity and a patented two speed fan-within-a-fan enhanced air flow system powered by an energy efficient 1/4 HP two-speed fan motor.

Door interlock switch automatically turns the fan and heating elements off when the oven door is open. A manual rotary switch will turn the fan on when the door is open for quick cool-down. The 60-minute timer has a continuous ring with manual shut-off. An indicator light glows when the heating elements are on.

The oven interior measures 23" wide (584mm) by 20" high (508mm) by 15 5/8" deep (397mm). The cooking chamber is porcelain enamel over heavy gauge steel with removable 11-position rack guides with 1 5/8" spacing (41mm) and 5 heavy-duty adjustable chrome-plated racks.

The oven exterior measures 31" wide (787mm) by 27 1/2" deep (699mm) by 25" high (635mm). Front, top and sides and trim are constructed with stainless steel.

A single fully insulated stainless steel door with thermal pane window opens a full 180° and features a unique 23" opening wide mouth design for easy viewing and sideways loading of 1/2-size sheet pans.

Ovens may be ordered with left hand hinge and right side controls or right hand hinge and left side controls. Job _____

ELECTRIC CONVECTION OVENS \searrow

Model COC-E1 Single Model COC-E2 Double

STANDARD FEATURES

- Energy efficient 9.5 KW per oven direct forced air heat system
- 208v or 220v-240v, 60hz or 50hz
- Electronic temperature control
- Double-pane thermal glass door window
- Oven lights
- 60-Minute continuous ring timer with manual shut-off
- □ 150°F (65°C) to 550°F (285°C) temperature range
- □ 1/4 HP air-cooled two-speed fan motor
- Cool down fan mode
- Elements-on and temperature-ready indicator lights
- Porcelain enamel oven interior
- □ 11-Position removable rack guides with 1 5/8" spacing
- **5** Heavy-duty, positive-stop, chrome-plated wire racks
- □ Stainless steel stainless front, top & sides
- □ Stainless steel, fully insulated hinged door
- □ Front mounted control panel for easy service access
- □ 1/8" Welded angle iron frame construction
- Heavy-duty industrial grade insulation in top, sides, back and doors
- One year limited parts & labor warranty


OPTIONS & ACCESSORIES


- Steam injection with front panel controls
- Computerized programmable controls with LED display.
- □ Stainless steel stand with or without casters
- Additional oven racks
- □ International voltages, 50hz
- Solid door
- Perforated rear panel
- Stacking kit

CERTIFICATIONS

S₽°






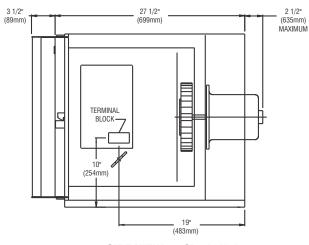

FRONT VIEW

SIDE VIEW — Single Unit

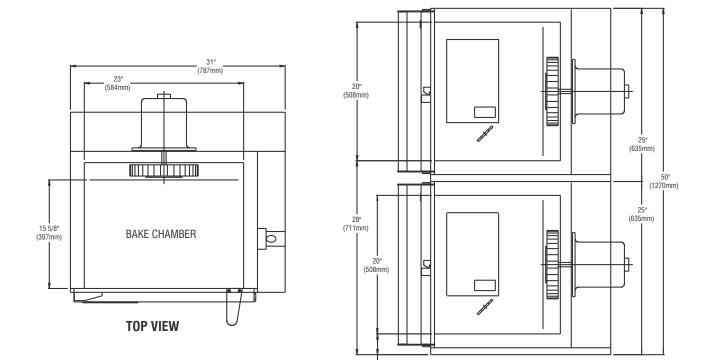

3"

76mm)

ALL DIMENSIONS NOMINAL

	Shipping Weight		Carton Size		Carton Dimensions					
Model	Lbs.	Kilos	Cubic Feet	Cubic Meters	Wi Inches	dth mm	De Inches	pth mm	lnches	leight mm
COC-E1	300	136	20.6	0.6	35.5	902	34.5	877	29.0	737
COC-E2 D	ouble	Shipped in two c	cartons as pe	er above specifi	ications					
POWER S	UPPLY									
		Nelson	Diana		Amps		Fan —	50 HZ	Fan —	60 HZ
Model	KW	Voltage	Phase	Line 1	Amps Line 2	Line 3	Fan — RPM-Iow	50 HZ RPM-high	Fan — RPM-low	60 HZ RPM-high
Model COC-E1	кw 9.5	Voltage 208	Phase 3	Line 1 29.0		Line 3 25.0				
				1	Line 2		RPM-low	RPM-high	RPM-low	RPM-high
	9.5	208	3	29.0	Line 2 29.0	25.0	RPM-low 825	RPM-high 1425	RPM-low 1140	RPM-high 1,725

MINIMUM CLEARANCES Direct Venting Inches mm Vent Hood Inches Inches Right 1 25 NA NA Left 1 25 NA NA Rear 25 NA NA 1

SIDE VIEW — Double Unit

