

SUPER DECK D-DSP SERIES GAS DECK OVENS



SPECIFICATIONS

BAKERS PRIDE D Series DSP Deck Ovens are ideal for display cooking and exhibition kitchens. These ovens are designed and engineered to be "built-in" behind brick stone or tile applied directly to ovens exterior or finished and trimmed in brass, copper, stainless or powder-coated trim.

Ovens may be stacked two high. Oven exteriors are all heavy-gauge, type 403 stainless steel and are fully insulated up to 5" (127mm) thick for cooler outer temperatures and consistent interior temperatures.

Interior oven frame is constructed of 1/4" (6mm) heavy-duty angle iron frame, completely welded to form a single, unitized section. The oven body and lining are then welded to the framework.

Oven interiors are manufactured of high-heat resistant 16-gauge aluminized steel. Doors are fully insulated, spring balanced to remain open or closed until moved and are finished in black powder coat with hard wood handles.

All models feature independent, operator-controlled top & bottom heat control dampers and micro slides for perfectly balanced results.

D Series features a 300° - 650° F (149° - 343° C) throttling thermostat, $10~3/4^{\circ}$ (273mm) interior deck height with $1~1/2^{\circ}$ (38mm) thick hearth stone decks (steel decks optional) and are supported by a $1/4^{\circ}$ (6mm) angle iron frame.

Combination gas control incorporates a manual gas valve, safety pilot and pressure regulator. Easily removable, slide-out, heavy-duty flame diverters distribute the burner flame uniformly in the burner chamber. A 3/4" (19mm) NPT gas connection is located on the left side and left rear of oven - operator/installer may choose.

Heavy-duty, 7-gauge hot rolled steel legs are standard and finished with durable Bakertone gray paint.

2 Year limited part and labor warranty standard.

Job	Item #

GAS DECK OVENS



Model	D-125	DSP	Single
Model	D-250	DSP	Double

STANDARD FEATURES

D Series @ 125,000 BTUH per deck natural gas or 105,000 BTUH in LP gas (LP gas not CE certified)
300°-650° F (149°-343°C) throttling thermostat
Top & bottom heat control dampers & micro-slides
Combination gas controls with valve, regulator & safety pilot
Heavy-duty, slide-out flame diverters

- 10 3/4" (273mm) interior deck heights with 1 1/2" (38mm) thick stone hearth decks
- All stainless steel exteriors
- Aluminized steel interiors
- Spring balanced, fully insulated doors finished in black powder coat with custom hard wood handles or stainless steel with tubular steel handles
- ☐ Front or side mounted controls with large, hinged access cover in black powder coat or stainless steel
- ☐ Riser top removable for field installation
- ☐ Front & side skirts
- ☐ Left side or rear gas connections on models with front mounted controls rear gas connection only on models with side mounted controls
- ☐ 7-Gauge legs
- Fully insulated throughout
- 2 Year limited part and labor warranty

OPTIONS & ACCESSORIES

Steel	decks

- ☐ 150°-550° F (65°-288°C) bake thermostat
- ☐ Set of 4 casters two with locks not for use with skirts
- Stainless steel leg covers
- Special height legs
- Automatic oven starter
- Draft flue for direct vent (not available on CE units)
- ☐ Black powder coated doors with hard wood handles
- Black powder coated hinged control access door panel
- Without dome and/or without skirts


CERTIFICATIONS









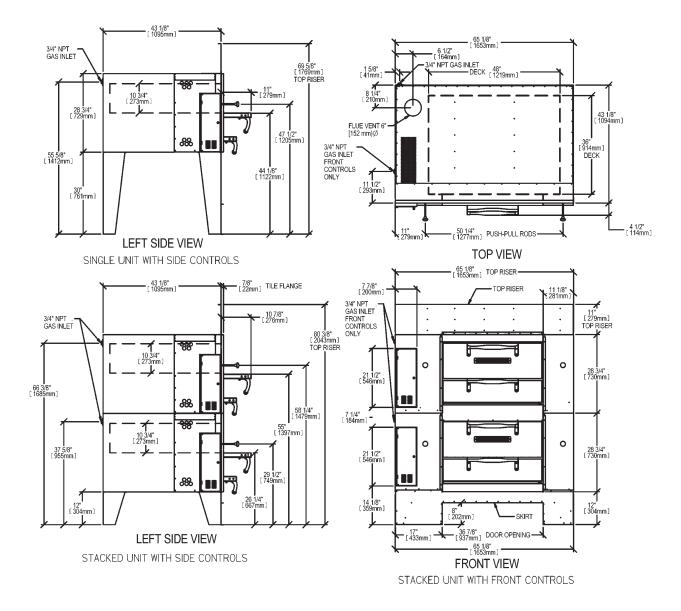

ALT DIMENSIONS NOMINAL

SHIPPING INFORMATION										
Shipping Weight				Carton Dimensions				Crate Size		
M. J. I	Lbs. Kilos		Width		Depth		Hei	Height		Cubic
Model	LUS.	MIIUS	Inches	mm	Inches	mm	Inches	mm	Feet	Meter
D-125	1385	626	31	787	53	1364	82	2083	88	2.5

Each oven ships separately Hearth Decks and Legs ship in separate cartons

SPECIFICATIONS									
			Overall D	imensior	IS				
Model	in.	mm # Decks				Depth		Height*	
Monei				Inches	mm	Inches	mm	Inches	mm
D-125	48 x 36	1219 x 914	1	65 1/4	1657	43	1092	59	1499
D-250	48 x 36	1219 x 914	2	65 1/4	1657	43	1092	70	1778

^{*} Overall height excludes dome top

MINIM	MINIMUM CLEARANCES							
	Noncombustibl Inches	e Construction mm	Combustible (Inches	Construction mm				
Right	0	0	1	25				
Left	0	0	3	76				
Rear	2	51	3	76				

Model	GAS TYPE	BTUH	KW	CONNECTION
D-125	natural	125,000	36.6	3/4"
D-250	natural	250,000	30.7	3/4"
D-125	LP	105,000	73.2	3/4"
D-250	LP	210,000	61.4	3/4"





MUST BE SPECIFIED AT TIME OF ORDER

STANDARD





BAKERS P. O. Number:	Casters optional	MODEL (Choose One) DS-805-DSP Single D-125-DSP Single Y-600DSP Single Y-800DSP Single DS-990-DSP Double D-250-DSP Double Y-602DSP Double Y-802DSP Double
Single Over Hinged Control Panel Door (Choose One) Front Mounted Side Mounted Hinged Control Panel Door (Choose One) Black Powder Coated Stainless Steel Lower Combustion Chamber Door (Choose One) Black Powder Coated Stainless Steel	n or Upper Oven of Stacked I Bake Chamber Door (Choose One) Black Powder Coated Stainless Steel Casters (Set of 4) Not suitable for DSP style finish with skirts Yes No Gas Type (Choose One) Natural Gas L.P. Gas	Automatic Oven Starter (Optional) Allows operator to establish automatic oven start & stop times Yes No Decorative Upper Riser Panel / Dome Note: Curved Dome on "Y" Series Ovens & Rectangular Riser on "D" Series Ovens Yes No
Lower Oven of State Hinged Control Panel Door (Choose One) Front Mounted Side Mounted Hinged Control Panel Door (Choose One) Black Powder Coated Stainless Steel Lower Combustion Chamber Door (Choose One) Black Powder Coated Stainless Steel Choose One) Natural Gas	Bake Chamber Door (Choose One) Black Powder Coated Stainless Steel Automatic Oven Starter (Optional) Allows operator to establish automatic oven start & stop times Yes No Casters (Set of 4) Not suitable for DSP style finish with skirts Yes No	Legs Legs (total height with or without casters) included. Please specify. 30" (Standard on all single deck models) 16" (Standard on all double deck models except D-250) 12" (Standard on model D-250)

NOTE: See specification sheets for additional options & accessories.

DSP CHECK LIST 4/06