

3836 SERIES ELECTRIC DECK OVENS



SPECIFICATIONS

BAKERS PRIDE EP-EB-ER Series Electric Deck Ovens are designed for high volume pizza, baking, roasting and all-purpose operations. Interior decks are 36" (915mm) deep and 38" (965mm) wide. Overall dimensions are 43" (1092mm) deep by 55" (1397mm) wide.

Ovens may be stacked three high. Similar footprints may be mixed with different deck heights. Oven exteriors are all heavy-gauge, type 403 stainless steel and are fully insulated up to 5" (127mm) thick for cooler outer temperatures and consistent interior temperatures.

Over interiors are manufactured of high-heat resistant 18-gauge aluminized steel. Doors are fully insulated, spring balanced with tubular steel handles.

All models feature independent, operator controlled infinite top & bottom heat for perfectly balanced results. Temperature ready indicator lights, moisture control damper and oven interior lights are standard.

EP (pizza) series feature a 200° - 800° F (149° - 427° C) thermostat, 7" (178mm) interior deck height with hearth stone decks (steel decks optional).

EB (bake) and ER (roast) models feature 150°-550°F (65°-288°C) thermostat, a 60-minute electric timer with continuous ring audible alarm and manual shut-off. Interior deck heights are 8" (203mm) or 12" (305mm). Steel deck standard (hearth stone decks optional).

ER (roast) models feature 150°-550°F (65°-288°C) thermostats, a 60-minute timer with continuous ring audible alarm and manual shut-off (five hour timer optional). Interior deck heights are 12" (305mm). Steel decks standard. Optional hearth stone decks reduce deck height by 1" (25mm).

3836 Models are 8KW and feature 8 electric elements (4 top and 4 bottom). Voltages are available in 208v, 220-240v or 440-480v $\,10^{\circ}$ or 30 as well as 230-400v in 30 with neutral.

2 Year limited part and labor warranty standard.



Job

ELECTRIC DECK OVENS

PIZZA	BAKE	BAKE or ROAST
 EP-1-8-3836 EP-2-8-3836 EP-3-8-3836 	EB-1-8-3836 EB-2-8-3836 EB-3-8-3836	ER-1-12-3836 ER-2-12-3836 ER-3-12-3836

STANDARD FEATURES


- 3836 Models @ 8,000 watts in 208v, 220-240v, 440-480v, 230v or 230-400v
- □ 300°-800° F (99°-427°C) "Pizza" thermostat EP models
- $\hfill\square$ 150°-550° F (65°-288°C) "Bake & Roast" thermostat EB and ER models
- □ Infinite Top & Bottom heat controls
- Electric 60-minute timer with continuous ring alarm and manual shut-off on bake & roast models
- Interior oven lights
- Moisture control dampers
- EP models 7" deck height (178mm) with hearth stone decks
- EB modesl 8" deck height (203mm) with steel decks
- □ ER models 12" deck height (279mm) with steel decks
- □ All stainless steel exteriors
- □ Aluminized steel interiors
- □ Steel decks in EB and ER Series
- Fully insulated
- 2 Year limited part and labor warranty

OPTIONS & ACCESSORIES

- New LightStone hearth decks
- □ Hearth stone decks in EB and ER Series steel decks are recommended for roasting applications
- □ Steel decks are optional in EP Series
- Set of 4 casters two with locks
- Internal steam manifold with individual, adjustable, solenoid controlled steam injectors in each deck steam source by others
- 5 Hour timer in lieu of 60 minute timer for roasting applications (ER models only)
- Stainless steel leg covers pair

CERTIFICATIONS

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification

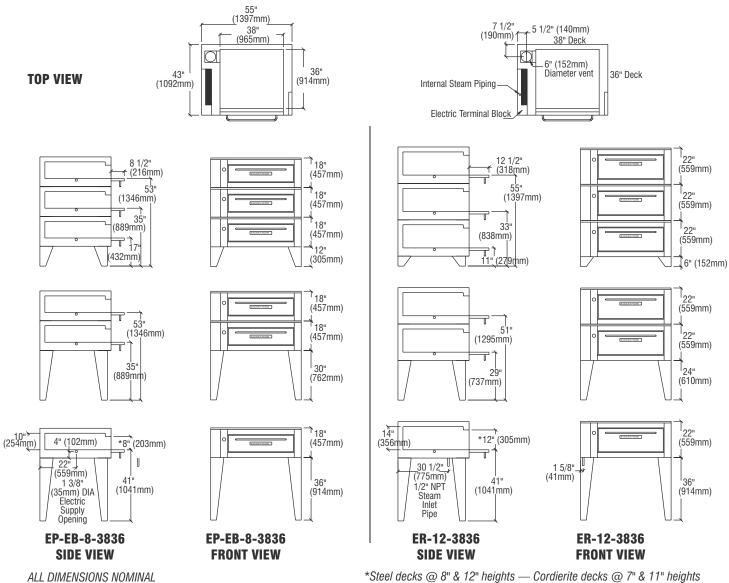

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION												
	Shipping Weight Carton Dimensions						ns		Crate Size			
Model	Lbs.	Kilos	Width Inches ₁ mm		Depth Inches ₁ mm		Height Inches mm		Cubic Feet	Cubic Meter		
EP-3836	600	273	60	1524	24	610	48	1219	40	1.1		
Under 500 lbs	= Shipping	Class #	70									

Each deck ships separately

SPECIFICATIONS												
Deck Size					#	Overall Dimensions						
Model			Height		Decks	Width		Depth		Height		
wodel	Inches	mm	Inches	mm		Inches	mm	Inches	mm	Inches	mm	
EP-1-8-3836	38x36	965x914	8	203	1	55	1397	43	1092	54	1372	
EP-2-8-3836	38x36	965x914	8	203	2	55	1397	43	1092	66	1676	
EP-3-8-3836	38x36	965x914	8	203	3	55	1397	43	1092	66	1676	
EB-1-8-3836	38x36	965x914	8	203	1	55	1397	43	1092	54	1372	
EB-2-8-3836	38x36	965x914	8	203	2	55	1397	43	1092	66	1676	
EB-3-8-3836	38x36	965x914	8	203	3	55	1397	43	1092	66	1676	
ER-1-12-3836	38x36	965x914	12	305	1	55	1397	43	1092	58	1472	
ER-2-12-3836	38x36	965x914	12	305	2	55	1397	43	1092	68	1727	
ER-3-12-3836	38x36	965x914	12	305	3	55	1397	43	1092	72	1829	

^{*} Height includes 36° (914mm) standard legs on single decks * Height includes 30" (762 mm) standard legs on double decks with 8" deck heights * Height includes 24" (610 mm) standard legs on double decks with 12" deck heights * Height includes 12" (305 mm) standard legs on triple decks with 8" heights





POWER SUPPLY

Each deck requires separate electrical connection

Left Side

Rear

Right Side

MINIMUM CLEARANCES

All Models

Model

WATTS

8,000

8,000

8,000

8,000

8,000

8,000

8.000

8,000

Inches

0

0

0

VOLTAGE

208

220-240

208

220-240

230-400

230

440-480

440-480

mm

0

0

0

In European Community Countries and North America. In NON-COMBUSTABLE locations only In European Community Countries only in COMBUSTIBLE locations. NOT for North America.

Non-Comhustible Construction'

PHASE

3

3

1

1

3N

1

3

1



TSW: 01/07

AMPS L1 | L2 | L3 | N

_

_

-

_ -

- - 35

mm

0

0

0

25 25 29

22 22 28

12 12 14

18 18

Combustible Construction* Inches

0

0

0

39 39

35 35 _ _ 10 14 14 4

35