

COUNTER TOP ELECTRIC BAKE & ROAST OVENS

198	O)
	6.5
	-99
1	
Ш	
1	

Model P48S

SPECIFICATIONS

The P48S Bake & Roast electric counter top ovens feature two independent, operator controlled baking chambers with 7 1/2" (190mm) deck heights and hearth stone decks making them ideal for baking and roasting.

The brick lined option adds top heat intensity, speeds recovery and increases production. The brick lined option may be easily installed in the standard P44S either in the field or factory. Hearth stone decks are easily removable for cleaning or replacement.

The P48S features two sets of controls — one set for each bake chamber. Each set consists of a 60-minute electric timer with audible alarms and manual shut-offs and a 150-550° F (65-288°C) thermostat.

The exterior front, sides, top and door are fabricated of heavy gauge type 430 stainless steel with a #4 finish. Door handle is constructed of tubular stainless steel. Exteriors measures 26" wide (660mm) by 28" deep (711mm) by 28 1/2" tall (724mm) overall.

The interiors are constructed of high heat aluminized steel, welded to form a single unitized body. The entire oven is insulated with 1 1/2" thick (38mm) industrial grade insulation. Each hearth stone deck measures 20 3/4" (527mm) by 20 3/4" (527mm).

Incloy, tubular heating elements provide top and bottom heat with up to 4300 watts in 208V or 220-240V, single or three phase. International voltages available. Ovens are stackable.

1 Year limited parts and labor warranty included.

Job	Item #	
-----	--------	--

ELECTRIC COUNTER TOP OVENS

Model	P48S
Model	P48BL

STANDARD FEATURES

P48S	@ 43	RUU V	vatts	in	208V	or 2	20-2	40V

- Two independent, operator controlled cook/bake chambers each with a separate set of controls
- Two 60-minute electric timers with continuous ring, audible alarms and manual shut-offs (one for each chamber)
- □ 150°-550°F Temperature range (65°-288°C)
- Corderite hearth decks
- 7 1/2" Deck height (190mm)
- All stainless steel exterior
- Unitized, welded, aluminized steel interior
- Fully insulated
- Limited one year parts & labor warranty

OPTIONS & ACCESSORIES

- ☐ 4" (102 mm) adjustable legs
- Stainless steel stand with or without casters
- Stacking kit
- Brick lined conversion kit standard on P48BL
- Steel decks in lieu of hearth stone
- Interior lights
- International voltages
- Glass windows in door(s)

CERTIFICATIONS















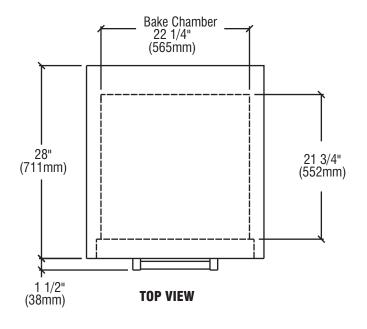

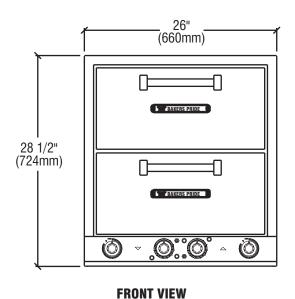

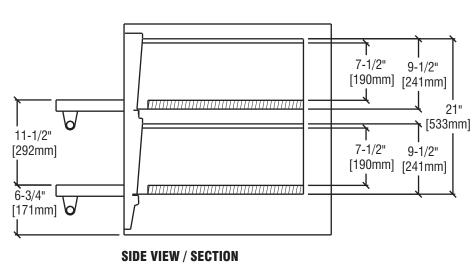

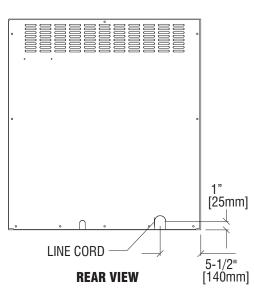

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION										
	Shipping	y Weigh	t	C	Crate	Size				
Model	Lbs.	Kilos	Wi Inches	dth mm	De _l Inches	oth mm	Hei Inches	ght mm	Cubic Feet	Cubic Meter
P48S	278	126	30	762	32	813	32	813	17.7	.51
P48BL	288	131	30	762	32	813	32	813	17.7	.51

Under 500 lbs = Shipping Class # 70

POWER S	SUPPLY							
Model	WATTS	VOLTAGE	PHASE	AMPS	USA	NEMA Canada	Plug # UK	Europe
P48S/BL	4300	208	1 & 3	20.7 & 20.7		6- 30P		
P48S/BL	4300	220-240	1 & 3	18.7 & 18.7				

Each oven requires a separate electrical connection.

- 1 Phase and Canada include cord and plug 3 Phase and International voltages has no line cord

SPECIFIC	CATIONS									
	Deck Size)	. #	# Cook		(Overall Dim	ensions		
Model	Inches	mm	Decks	Chambers	Widt Inches	th I mm	Depti Inches	n I mm	Heigh Inches	it mm
P48S/BL	20 3/4 x 20 3/4	527x527	2	2	26	660	28	711	28 1/2	724

MINIMUM CLEARANCES											
Non-Combustible Construction* Combustible Construction** Inches mm Inches mm											
3		3	76								
3		3	76								
3		3	76								
		Non-Combustible Construction*	Non-Combustible Construction*								

* In European Community Countries and North America. In NON-COMBUSTABLE locations only ** In European Community Countries only in COMBUSTIBLE locations. NOT for North America.



6-30P

