

XP SPEED OVEN

Design Features

- Fastest available cooking technology
- Quick change over to alternate menu items
 - Touch screen with Icon menu
 - Minimized screens to cook product by Group
- Quick programming
 - 6 programmable phases
 - USB –upgradable
- Smaller foot print (as compared to competitive ovens)
- Phased cook cycles (6 possible phases)
- Best menu flexibility (proteins, vegetables, bake goods, combinations)
- High bake quality /High browning quality
 - Top side microwave
 - Top and bottom air
 - Improved Microwave Distribution
 - Improved Air Distribution
 - Higher impingement air speed /efficiencies
- Energy savings as compared to oven technologies
- Easy to clean
 - Removable jet plates top and bottom
- Automatic voltage detection and adjustment
- Vent less operation

Standard Features

- Air impingement
- Microwave
- 0-100% Microwave; 10% increments
- Menu options: 16 Temporary Groups, 24 recipes per Group
- Self diagnostics components / performance
- Insulated cook chamber
- 6 cooking stages
- 200° -525° F Temperature range
- Cool to touch doors
- 10-100% Fan speed; 10% increments
- 1 rack / position
- 1 basket, 1 tray and 1 peel



Options & Accessories

- Pizza Stones
 - Medium – 21926348
 - Large – 21926383
- Trays
 - Small – 21926715
 - Medium – 21926710
 - Wave Tray Medium - 21926750
- Baskets
 - Small – 21926745
 - Medium – 21926740
- Spatula / Peel
 - Medium – 21926640
 - Large – 21926645
- USB Flash Drive – 2 GB
- Ethernet Connect
- Screens
 - 9" Wire, Small – 21926725
 - 9" Perforated, Small – 21926735
 - 14" Wire, Medium - 21926720
 - 14" Perforated, Medium - 21926730


Certifications



Compliance with UL 710B using EPA Method 202. Ventless certification is for all foods items except for foods classified as “fatty raw proteins.” Such foods include bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

Continuous product improvement is policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification.

XP SPEED OVEN

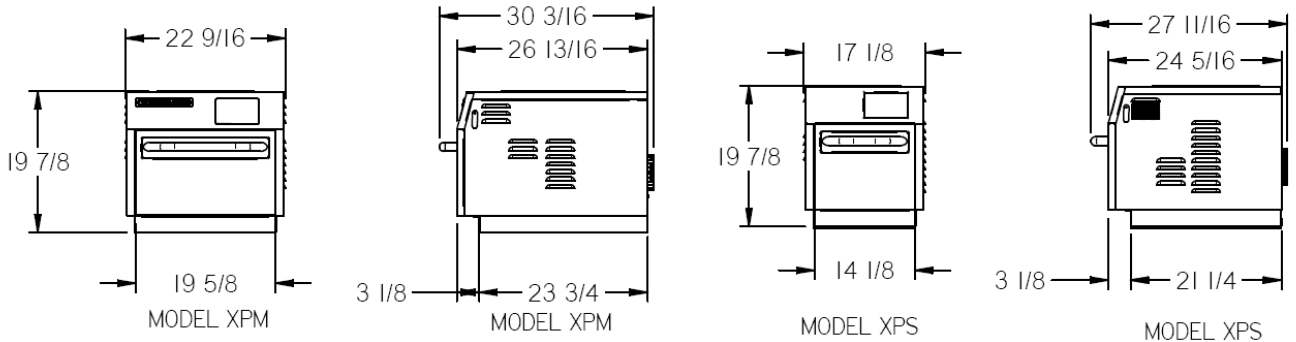

Electrical Specifications		
Voltage (US) 60 HZ (Optional 200/220/230V 50 HZ)	208/240	208/240
Amperage	30	30
Phase	1	1 or 3
Service	30	30
Frequency	60 or 50	60 or 50
Field configurable phase		No
Power management system	Yes	Yes
Plug configuration NEMA (domestic US)	6-30P	6-30P

Exterior Dimensions		
Height	19-7/8	19-7/8
Width	17-1/8	22-9/16
Depth	27-11/16	30-3/16
Cook Chamber Dimensions		
Height	7-15/16	7-15/16
Width	10-1/8	15-5/8
Depth	12-1/4	17-3/4
Volume cu. Ft.	0.57	1.27
Weight lbs. (unpacked)	140	175
Stackable	Yes	Yes
Clearances (inches)	0	0
Top	2	2
Sides	2	2
Counter mounting	EPDM	EPDM
Construction		
Exterior	430	430
Interior	430	430