

BEVERAGE-AIR

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax# 1-336-245-6453 http://www.Beverage-Air.com

Commercial Refrigeration Equipment General Specification

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

BB 23" BASE SERIES—BACK BAR REFRIGERATOR OPEN FOOD RATED

Food Rated models are certified for bottled beverages, packaged food, and open food.

Shallow depth, back bar, self-contained refrigerators come in two widths of 48" and 72." Two heights include 34" with standard galvanized steel top for under shelf application and 36" when adapted with a 2" stainless steel top (specify -27). Depth is 23" from face of door to back of cabinet. Handle projects 1/2." Solid door models come standard with locks.

CABINET CONSTRUCTION

Standard, cabinet exterior construction includes black steel finish. Stainless steel exterior option available (-S models).

Galvanized sub top standard. 2" stainless steel top optional (specify -27).

Hinged solid doors are self-closing and include a 90° stay-open feature and locks. Doors include magnetic gaskets for positive seal.

All stainless steel interior with radius corners is easy to keep clean and meets NSF Standard 7 for open food containers. Reinforced floor made from heavy-duty stainless steel to provide long lasting service.

Two (2) epoxy-coated shelves per section standard.

Interior, incandescent, lighting is standard with manual on/off switch.

Foamed-in-place CFC and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION

Refrigeration is fully accessible behind grille to right side of cabinet. Evaporator located above condensing unit permits full use of interior spaces. Forced air is projected the length of cabinet across the ceiling. Refrigeration system uses R134a refrigerant, which is CFC and HCFC-free for compliance with environmental safety concerns. Remote refrigeration models include expansion valve installed.

Condensate elimination is automatic and non-electric.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.











*Note: Not all markings may apply to all model variations.

Item No. _______Quantity ______

BEER EQUIPMENT SOLID DOOR BACK BAR REFRIGERATORS 23" BASE BB SERIES

OPEN FOOD RATED

MODELS: BB48YF/48RF BB72YF/72RF



BB48YF



BB72YF-1-B-27 (SHOWN WITH OPTIONAL 2" S/S TOP)

AVAILABLE OPTIONS

- Wire shelf dividers
- 3" or 6" casters; 6" legs
- WINE models available (40°- 60°F models)

Available From:

Model Specified	Store#
Location	Quantity



Back Bar Refrigerators, 23" Base Open Food Rated Models: BB48YF, BB48RF, BB72YF, BB72RF

MODEL	BB48YF	BB48RF	BB72YF	BB72RF
EXTERNAL DIMENSIONAL DATA				
Length Overall (inches) Length Overall (mm)	48" 1219	48" 1219	72" 1829	72" 1829
Depth Overall (inches) Depth Overall (mm)	23 1/2" 597	23 1/2" 597	23 1/2" 597	23 1/2" 597
Height Overall— (inches) Height Overall—(mm)	34" 864	34" 864	34" 864	34" 864
Clear Door Width (inches)	16 7/16" x 29 1/4"	16 7/16" x 29 1/4"	17 7/8" x 29 1/4"	17 7/8" x 29 1/4"
Depth With Door Open 90°	41 3/8"	41 3/8"	42 3/4"	42 3/4"
Number of doors	2	2	3	3
INTERNAL DIMENSIONAL DATA				
NET Capacity (cubic ft.) NET Capacity (Liters)	12.1 343	12.1 343	19.4 549	19.4 549
Internal Length Overall (inches) Internal Length Overall (mm)	36" 914	36" 914	60" 1524	60" 1524
Internal Depth Overall (inches) Internal Depth Overall (mm)	18 1/2" 470	18 1/2" 470	18 1/2" 470	18 1/2" 470
Internal Height Overall (inches) Internal Height Overall (mm)	29 1/2" 749	29 1/2" 749	29 1/2" 749	29 1/2" 749
Number of Shelves	4	4	6	6
Number of Kegs (straight wall)	2	2	3	3
ELECTRICAL DATA				
Full Load Amperes 115/60/1	5.0	remote	5.0	remote
REFRIGERATION DATA	_			
Horsepower	1/4	remote	1/4	remote
WEIGHT DATA				
Gross Weight (Crated lbs)	269	223	366	330
Gross Weight (Crated kg)	122	101	166	150

(UL











*Note: Not all markings may apply to all model variations.
*N/A: Not available at time of printing.

PLAN VIEWS






ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.



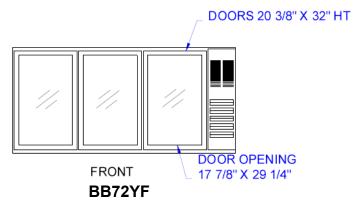

BEVERAGE-AIR® CORPORATION