



# BIZERBA

■ ... closer to your business

The fully automatic Bizerba A 400 series has been a success in the U.S. market since 1992 ...


## ... A 400 series – fully automatic slicer ...



This heavy-duty slicer is designed to run 2 shifts a day. Precise stacking and shingling programs increase productivity. The virtually hands-free operation improves hygiene and reduces the risk of cross-contamination.

### A 400 (Table version)

- Stack, shingle, shave
- Programmable with up to 99 memories
- Max. stack height = 3.5"
- Shingle traditionally, transverse, multi-layer, multi-row (3)
- Adjustable distance between slices, 3 mm-50 mm
- Total shingle portion length = 10"
- Shaving with optional attachment
- Standard 13" blade
- Product size round: min. = 2", max. = 7"
- Product size rectangular: min. = 2" x 2", max. = 6.89" x 9.45"
- Product up to 15" long without re-clamping
- Multiple chubs in carriage for full production, up to 10" wide
- Slice thickness = 0.5-12 mm. Adjustable in tenths.
- Adjustable carriage speed: 30-55 strokes per minute
- Cleaning and Sharpening programs for total safety
- Two carriage lengths available, 400 mm and 600 mm
- Built in diagnostic program
- Optional mobile stand.

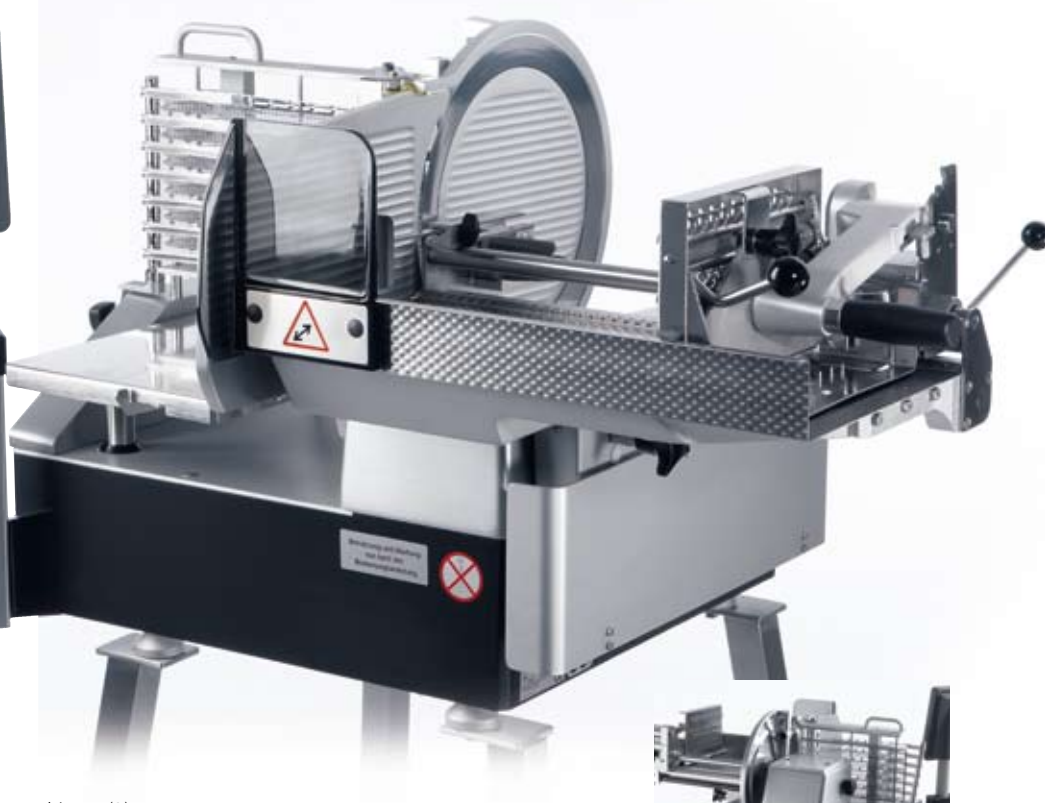

### Best blade in the industry

The unique design of our blade produces clean and consistent slices. The hardness results in a long lasting sharp edge. The life of the blade is dramatically longer than the competition. The circumference translates into an additional 4" of blade passing through the product per revolution. Our standard blade is the hardest, thinnest, largest, straightest blade in the industry.

- 13" diameter, chromium coated hard alloy
- 60-62 Rockwell hardness at the edge
- Safety, precision and proven Bizerba quality are the outstanding features of the fully automatic A 400 series



Project Name \_\_\_\_\_  
 Model/s \_\_\_\_\_  
 Number \_\_\_\_\_  
 Quantity \_\_\_\_\_

# BIZERBA

... closer to your business

## 1-phase AC current

- 120/230° V, \*This voltage is special order
- 60/50 Hz
- 2.9/3.1 A
- Power consumption 0.3/0.7 kW

## 3-phase AC current

- 230/400° V, \*This voltage is special order
- 50 Hz
- 1.8/1.1 A
- Power consumption 0.6 kW

## Blade diameter

- 13" (330 mm)

## Blade speed

- 266 r.p.m.

## Max. produce size

- Round: min. 1.97" (50 mm), max. 7.08" (180 mm)
- Rectangular: min. 1.97 x 1.97" (50 x 50 mm), max. 6.9 x 9.45" (175 x 240 mm)

## Slice thickness

- 0.02-0.47" (0.5-12 mm)

## Program memory

- 99

## Carriage speed

- Variable between 30 and 55 strokes per minute

## Receiving tray

- = 10" x 13.62" (254 x 346 mm)

## Paper/foil size

- 1/8 sheet, min. 14.17" x 9.45" (360 x 240 mm)
- max. 14.76" x 9.84" (375 x 250 mm)

## Receiving tray movement

- Horizontal = 6.3" (160 mm)
- Vertical = 3.54" (90 mm)

## Stack height

- Max. 3.54" (90 mm)

## Machine footprint

- Width 16.14" (410 mm), depth 19.3" (490 mm), reduced: Width 16.14" (410 mm), depth 15.75" (400 mm)

## Space required

- A 404** Carriage for 15.75" product length (400 mm)

- Width 46.85" (1190 mm), depth 33.86" (860 mm), height 31.9" (810 mm)

- A 406** Carriage for 23.62" product length (600 mm)

- Width 51.18" (1300 mm), depth 33.86" (860 mm), height 26.77" (680 mm)

## External dimensions

### A 404

- Width 41.34" (1050 mm), depth 31.5" (800 mm), height 26.77" (680 mm)

### A 406

- Width 49.21" (1250 mm), depth 31.5" (800 mm), height 26.77" (680 mm)

## Gross weight

- A 404 / A 406, 239.8 lbs (109 kg), stand 35.2 lbs (16 kg)

## Shipping crate

### A 404

- Length 43.30" (1100 mm), width 35.43" (900 mm), height 40.55" (1030 mm)



### A 406

- Length 51.18" (1300 mm), width 35.43" (900 mm), height 41.34" (1050 mm)


## Warranty

The A 400 carries a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins with the date of purchase and, provided the unit is used properly in accordance with our instructions, is in full effect for one year from that date. Any work to be performed under this warranty must be performed between the hours of 8:00 a.m. and 4:30 p.m. local time, Monday to Friday. Bizerba will not pay overtime charges for work performed other than during normal business hours. Accessories have a 30-day replacement or repair warranty for the period beginning on the date of purchase. Damages incurred in transit or from installation error, accident, alteration or misuse are not covered. Transit damages should be reported to the carrier immediately. Bizerba shall not be liable for any consequential, compensatory, incidental, or special damages. All warranty work must be performed by a factory authorized Bizerba Representative.


### A 404

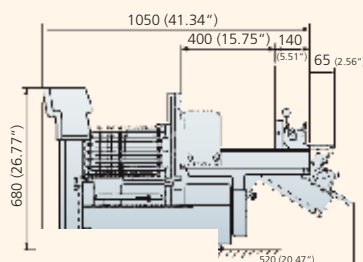

### A 406

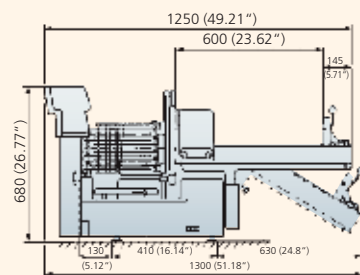

## Stand of wheels



## Members of the Bizerba Group

Bizerba GmbH & Co. KG  
 Wilhelm-Kraut-Straße 65  
 72336 Balingen  
 Germany  
 Tel. +49 7433 12-0  
 Fax +49 7433 12-2696  
 marketing@bizerba.de  
 www.bizerba.com

Bizerba USA Inc.  
 31 Gordon Road  
 Piscataway  
 New Jersey 08854  
 USA  
 Tel. Office +1 732 565-6000  
 Tel. Service +1 732 565-6001  
 Fax +1 732 819-0429  
 us.info@bizerba.com  
 www.bizerbausa.com

Bizerba Canada Inc.  
 2810 Argentea Road #9  
 Mississauga,  
 Ontario L5N 8L2  
 Canada  
 Tel. +1 905 816-0498  
 Fax +1 905 816-0497  
 sales@bizerba.ca  
 www.bizerba.ca

Bizerba de México, S.A. de C.V.  
 Av. Rio Mixcoac No. 157  
 Colonia Florida  
 01030 México, D.F.  
 México  
 Tel. +52 55 5663-1397  
 Fax +52 55 5663-1296  
 eduardo.aburto@bizerba.com.mx  
 www.bizerba.com.mx