BLODGETT

Phoenix Modular Spreader



Shown without legs

OPT	TIONS	AND.	ACCES	SORIES
-----	-------	------	-------	--------

(AT ADDITIONAL CHARGE)

- Flue riser
 - ☐ 12" high stainless steel short back riser
 - ☐ 24.5" high stainless steel high back riser
 - ☐ 30" high stainless steel high back riser
- Single-shelf (mounts on 24.5" flue riser)
 - ☐ Solid shelf
 - Tubed shelf
- Double-shelf (mounts on 36" flue riser)
 - ☐ Solid shelves
 - Tubed shelves
- Gas pressure regulator
 - **1**"
 - **□** 1-1/4"
- Interconnect gas line with quick disconnect
 - □ 36" long
 - ☐ 48" long
- Common plate shelf

Project					
Item No.					
Quantity					
 Model BPMP-6 - 6" wide modular spreader Model BPMP-12 - 12" wide modular spreader Model BPMP-18 - 18" wide modular spreader Model BPMP-24 - 24" wide modular spreader Model BPMP-36 - 36" wide modular spreader 					
SPECIFY Gas Type Front Manifold Cap & Cover* Flue Riser Height	□ Natural Gas □ Required □ 5" □ 24.5" (option)	☐ Propane ☐ Not Required ☐ 12" (option) ☐ 36" (option)			
Operating altitude (if above 20)00 ft (700 meters)				

* 1-1/4" front manifold is provided on all units. 1-1/4" rear manifold connection is capped. Remove cap for rear manifold connection

STANDARD FEATURES (All models)


- 14 gauge stainless steel all welded body construction
- Stainless steel top, front, sides and stub back
- Stainless steel front, top, sides, bottom and flue riser
- 14 gauge welded body construction
- 3/4" gas regulator shipped uninstalled (additional sizes available as options)
- 5" flue riser
- 6" stainless steel plate shelf
- 26" tubular stainless steel legs with adjustable feet (may be ordered without legs)
- Stainless steel crossrails
- Warranty: two year parts and one year labor warranty








PHOENIX MODULAR SPREADER




APPROVAL/STAMP

36" WIDE UNITS SHOWN

Dimensions are in inches (mm)

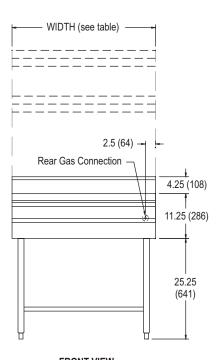

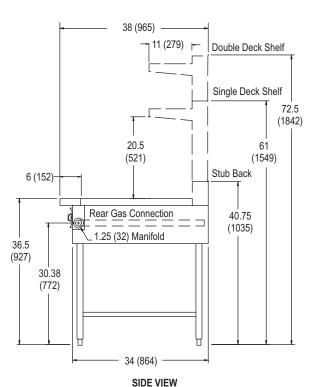

FRONT VIEW

0.52 1.21

SHORT FORM SPECIFICATIONS

MODEL	WIDTH	DEPTH	HEIGHT	SHIPPING WEIGHT
BPMP-6	6"			80 lbs (36 kg)
BPMP-12	12"			100 lbs (45 kg)
BPMP-18	18"	38"	See drawing	120 lbs (54 kg)
BPMP-24	24"			150 lbs (68 kg)
BPMP-36	36"			190 lbs (86 kg))

Provide Blodgett modular spreader for heavy duty gas equipment in 6", 12", 18", 24" or 36" wide models. Spreader to have 14 gauge all welded steel construction, stainless steel top, front, sides, bottom and stub back. 3/4" gas regulator provided. To be mounted on 26" tubular stainless steel legs with adjustable feet. Two year parts and one year labor warranty. Provide options and accessories as indicated.

UTILITY INFORMATION				
OPERATING PRESSURE		GAS: Modular spreaders are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifol connection. For rear manifold connection, remove cap. Spreader cabinets are supplied with 3/4" gas pressure re		
Natural Gas	Propane	tor or 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.) The unit must be connected with the gas regulator supplied.		
5" W.C. min.	10 W.C. min. 14" W.C. max.	sidening, The disk made be considered man are gas regulator supplied.		

NOTE: The company reserves the right to make substitutions of components without prior notice

Printed in U.S.A. NOTE: FOR COMMERCIAL USE ONLY P/N BR00069 Rev A (5/11)