BLODGETT

Phoenix Heavy Duty Salamander Broilers



OPTI	กทร	ΔND	ACCI	=880	RIFS
UI 11	\mathbf{c}		$\Delta U U I$		'

(AT ADDITIONAL CHARGE)

- Gas pressure regulator
 - □ 1^{*}
 - □ 1-1/4"
- ☐ Side splash kits (specify when ordering)
- ☐ Interconnect gas line for single gas connection for range mount units

Project				
Item No.				
Quantity				
■ Model BPSB-36WM - 36" wide wall mounted salamander ■ Model BPSB-36RMT - 36" wide range mounted salamander				
SPECIFY				
Gas Type	■ Natural Gas	□ Propane		
Front Manifold Cap & Cover Required Not Required				
Rear Manifold*	☐ Rear (3/4")	☐ Rear (1")		
Operating altitude (if above 2000 ft (700 meters)				

* 1-1/4" front manifold is provided on all units. 3/4" or 1" rear manifold connection is capped. Remove cap for rear manifold connection

STANDARD FEATURES (All models)

- 35.000 BTU/hr. ceramic tile infrared burner
- Counter balance mechanism
- Four locking cook positions
- Large 12" x 26-1/2" lift-out chrome plated broiler grid
- Grid carriage glides on roller bearing
- Grease deflector guides grease into pans at bottom of broiler
- Stainless steel front, sides, bottom and top
- 14 gauge stainless steel construction
- 3/4" gas pressure regulator
- Warranty: two year parts and one year labor warranty

STANDARD FEATURES (Wall Mount)

■ Wall mounting bracket

STANDARD FEATURES (Range Mount)


■ Stainless steel riser








PHOENIX SALAMANDER BROILER

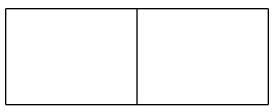

APPROVAL/STAMP

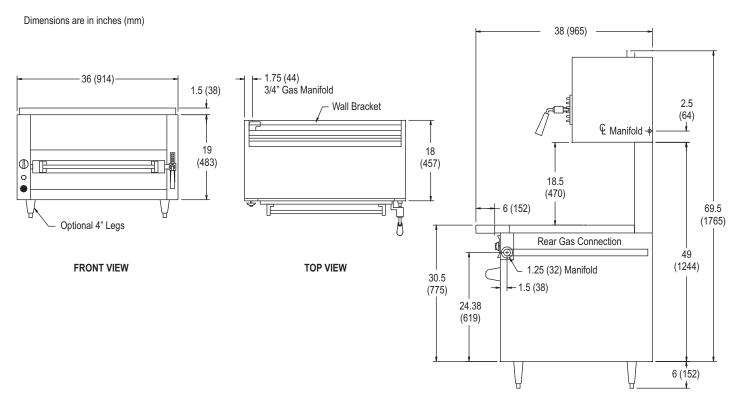

SIDE VIEW (Range Mounted Unit)

MODEL	WIDTH	DEPTH	HEIGHT	SHIPPING WEIGHT
BPSB-36WM	36"	18"	See drawing	240 lbs (109 kg)
BPSB-36RMT	30			310 lbs (141 kg)

SHORT FORM SPECIFICATIONS

Provide Blodgett heavy duty salamander broiler. Unit to be wall or range mounted. To have stainless steel top, front, sides and bottom, (and riser on range mounted unit). Heavy gauge chrome plated cooking grid to measure 12" x 26-1/2" multi-action positioning handle mounted to carriage. Carriage to have roller bearings and four locking positions. Provide deflector to guide grease into bottom drip pan. To have 35,000 BTU/hr. infrared burner. Provide gas pressure regulator for use with natural or propane. Two year parts and one year labor warranty. Provide options and accessories as indicated.

UTILITY INFORMATION						
I MODEL I	GAS RATING	OPERATING PRESSURE		GAS: Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4"		
	(BTU/hr)	Natural Gas	Propane	capped rear manifold connection. For rear manifold connection, remove cap. Ran are supplied with 3/4" gas pressure regulator or 1-1/4" or 1" gas pressure regulator		
BPSB-36WM	35,000	5" W.C. min.	10 W.C. min. 14" W.C. max.	accessories. (Specify required front manifold cap and cover when ordering.) The unit must be connected with the gas regulator supplied.		
BPSB-36RMT	35,000	J VV.O. IIIIII.		FLUE EXHAUST: Installation under a vented hood is recommended.		

NOTE: The company reserves the right to make substitutions of components without prior notice

Printed in U.S.A. NOTE: FOR COMMERCIAL USE ONLY P/N BR00073 Rev A (5/11)