



MODEL HV-50E

Half-Size Electric Oven



Shown with optional stand and casters

Project _____

Item No. _____

Quantity _____

HV-50E

Standard depth baking compartment - accepts five 13" x 18" standard half-size baking pans in front to back positions.

All data is shown per oven section, unless otherwise indicated.

Refer to operator manual specification chart for listed model names.

EXTERIOR CONSTRUCTION

- Fully welded angle-iron frame
- Stainless steel front, top, sides and back
- Dual pane tempered glass windows encased in a stainless steel door frame with hinged inner glass for easy cleaning

INTERIOR CONSTRUCTION

- 316 stainless steel liner for easy cleaning
- Two halogen interior lights
- Drain in oven cavity
- Hinged air pressure panel for easy cleaning
- Up to 2.5" of mineral board insulation for greater heat retention
- Three tubular heater element design

OPERATION

- Standard control with function selection for hydro low, hydro high, hot air, and cool down
- Retherm and Fry bands on control
- Hydrovection cook modes provide low or high humidity
- Hot air cook mode for baking and pastries
- One touch cooking
- Four speed auto-reversing fan motor for even bake
- Cavity vent control provides ability to release steam at the push of a switch
- Thermostatically controlled quench system, Eco-Friendly
- 1/2 H.P. motor

STANDARD FEATURES

- Removeable core temperature probe
- 95 dB beeper on the control panel to compete with even the loudest of kitchens
- Start-up inspection service by factory authorized service agent
- 1 year parts and 1 year labor warranty

OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- **Controls:**
 - MenuSelect control can hold multi-stage programming for up to 99 products, includes Cook & Hold and core probe cooking
 - Touchscreen control allows cooking with timer and core probe simultaneously. Includes shelf timing, cooking compensation and multi-shelf recipes. Holds up to 255 recipes.
- **Stands:**
 - 11" (286mm) stainless steel stand
 - 29" (737mm) stainless steel stand
 - Extra stainless steel oven racks
 - Additional core probe
 - Side heat shield
 - Water pressure regulator




BLODGETT COMBI

www.blodgett.com

44 Lakeside Avenue, Burlington, VT 05401 • Phone: (802) 658-6600 • Fax: (802) 864-0183






MODEL HV-50E

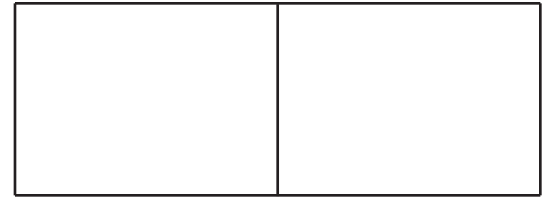

APPROVAL/STAMP

DIMENSIONS ARE IN INCHES (MM)

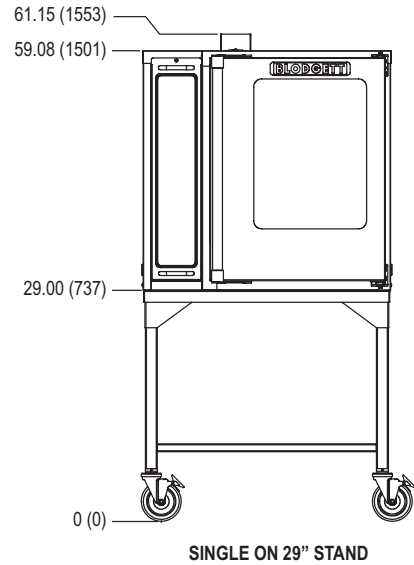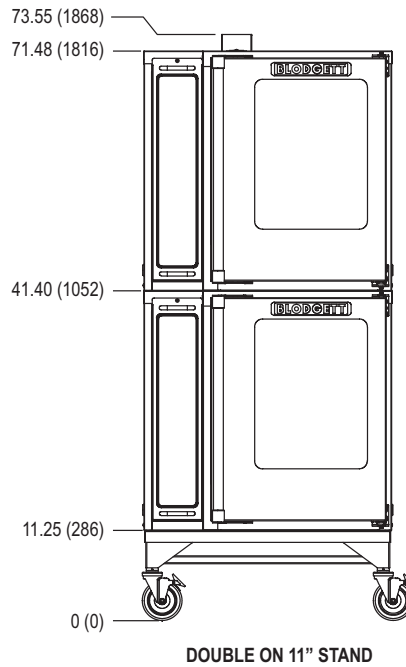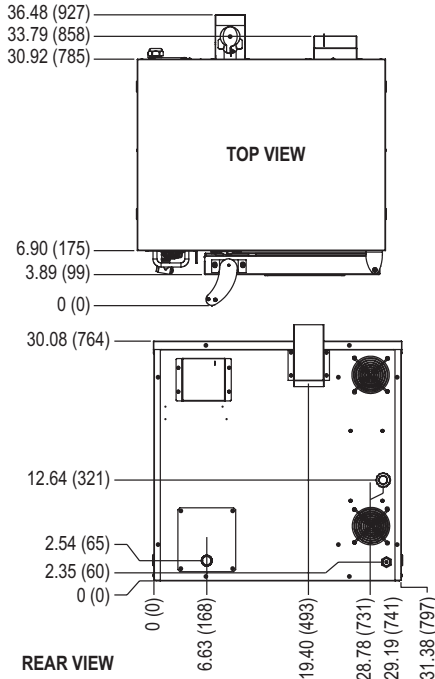

SHORT FORM SPECIFICATIONS

Provide Blodgett half-size hydrovection oven model HV-50E. (single/double) compartment with fully welded angle iron frame. Each compartment shall have 316 stainless steel liner. Unit shall accept five 13" x 18" standard half-size bake pans. Doors shall be stainless steel with dual pane thermal glass windows. Unit shall be electrically heated by three tubular elements. Air in baking chamber distributed by single inlet blower wheel powered by a multiple speed, reversing, 1/2 HP motor with thermal overload protection. Each chamber shall be fitted with bright halogen lamps, and five standard chrome-plated removable racks. Unit shall have manual control with hydro low and hydro high moisture control, hot air and cool down modes. Breaker shut off switch on front panel for easy service. Start-up inspection service by factory authorized service agent. 1 year parts and 1 year labor warranty. Provide options and accessories as indicated.

DIMENSIONS:

Floor space	31.38" (797mm) W x 36.48" (927mm) D
Interior	15.3" (389mm) W x 20.5" (521mm) H x 22" (559mm) D
Product clearance from combustible and non-combustible construction	
Oven sides	0" (0mm) Blodgett recommends 4" clearance from any heat source on the control panel side of the oven, an optional heat shield should be considered.
Oven back	0" (0mm)

WATER SUPPLY (per section):

Good quality water feed is the responsibility of the owner. Water quality must be within the following general guidelines.

TDS: < 100 ppm	Hardness: 80-120 ppm	pH: 7.0 - 8.0
Chlorides: < 30 ppm	Chlorine: 0 ppm	30(min)-50(max) PSI
3/4" garden hose cold water	1" NPT drain connection	Max. drain temp. 140°F (60°C)

The best defense against poor water quality is a water filter system designed to meet your water quality conditions. **Filtered water is highly advised.**

Water Consumption

Hydro Mode	1.5 GPH
------------	---------

Appliance is to be installed with backflow protection in accordance with Federal, State or Local codes.

MAXIMUM INPUT:

Single	13kW
Double	26kW (13kW each section)

POWER SUPPLY:

V.A.C.	Hz	Phase	kW	Amperes (L1-L2-L3)
208	60	1	13	62/-/62
208	60	3	13	38/38/34
240	60	1	13	53/-/53
240	60	3	13	31/31/29

MINIMUM ENTRY CLEARANCE:

Uncrated	32" (813mm)
Crated	36" (914mm)

SHIPPING INFORMATION:

Approx. Weight

Per section	350 lbs. (159 kg)
-------------	-------------------

Crate sizes

35-1/2" (902mm) x 42-1/2" (1079mm) x 37-1/2" (953mm)
(2 crates required for double)

NOTE: The company reserves the right to make substitutions of components without prior notice

BLODGETT COMBI

www.blodgett.com

44 Lakeside Avenue, Burlington, VT 05401 • Phone: (802) 658-6600 • Fax: (802) 864-0183