



# Camshelving® Premium Series

## Mobile – High Density Mobile Starter Units with Camguard® Antimicrobial

4 Shelf Units - Solid or Vented Plates

2 Post Heights

67" (1702 mm), 75" (1905 mm)

1 Shelf Depth

24" (610 mm)

3 Shelf Lengths

36" (914 mm), 42" (1067 mm), 48" (1219 mm)



Item No. \_\_\_\_\_

Specifier Identification No. \_\_\_\_\_

Model No. \_\_\_\_\_


Quantity \_\_\_\_\_

### High Density Mobile Unit Includes:

- Two Pre-Assembled Mobile Post Kits
- Four Shelf Kits
- Four High Density Casters



High Density Caster with Donut Bumper (sold separately)

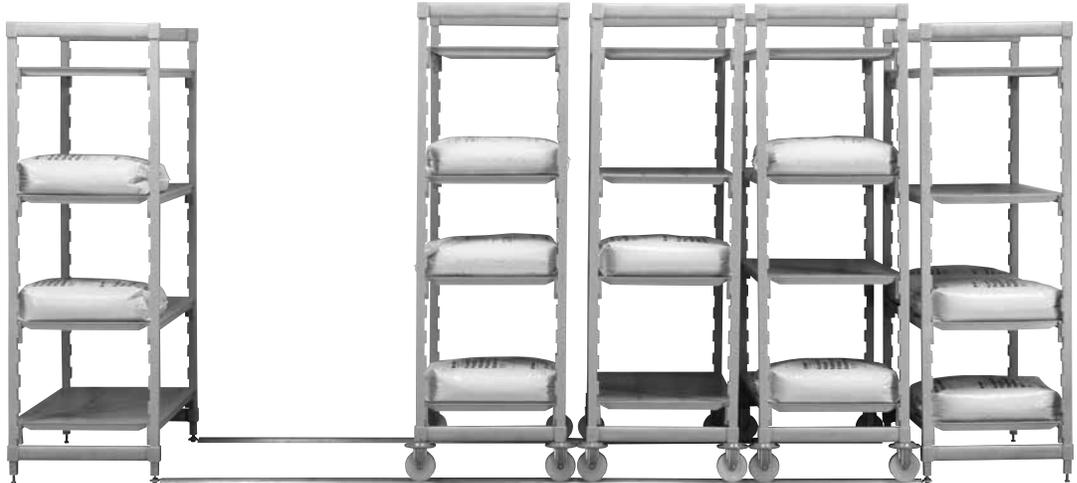

### Features & Benefits

#### Increases Storage Capacity

Maximize storage capacity by eliminating aisles and utilizing all available space. Ideal for operations with limited space or that need to use their space more efficiently. Floor track system provides safe and easy access to stored product. Heavy weight loads roll securely on raised floor track.

#### Easy to Clean

Camshelving shelf plates contain Camguard antimicrobial, a silver-ion technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation. Camguard is incorporated throughout the shelf plate material so that it will never wash off or wear out. The shelf plates remove easily and can be placed in an open end Camrack® (OETR314) for washing. The traverses and post kits are smooth polypropylene so they can be wiped or steam cleaned. The traverses can be easily removed and washed in a conveyor dishwasher.

#### Easy to Assemble

Assembles in minutes with the use of a rubber mallet. Requires no bolts or nuts, clips or stainless steel connectors. Molded in dovetails on posts ensure that traverses set easily into place.

#### Strong as Steel

Posts and traverses are made of a steel core coated with polypropylene. Uniquely engineered post connectors offer exceptional cross stabilization. Casters are made of reinforced nylon. Maximum weight-bearing capacity of 750 pounds (340 Kg) per mobile unit.

#### Easy to Adjust

Requires use of rubber mallet. Shelves can be adjusted at 4" (10,2 cm) increments. Add a shelf to an existing unit by simply ordering the appropriate Shelf Kit.

#### Optional Accessories

Place the High Density Donut Bumper over the top of the High Density Caster before placing the caster in the post. Protects the casters and posts of adjacent High Density Mobile Units.

### Approvals



COMPONENTS



# Camshelving® Premium Series

## Mobile – High Density Mobile Starter Units with Camguard® Antimicrobial

### 4 Shelf Units - Solid or Vented Plates

#### High Density Mobile Unit Includes:

- Two Pre-Assembled Mobile Post Kits
- Four Shelf Kits
- Four High Density Casters




Item No. \_\_\_\_\_

Specifier Identification No. \_\_\_\_\_

Model No. \_\_\_\_\_

Quantity \_\_\_\_\_

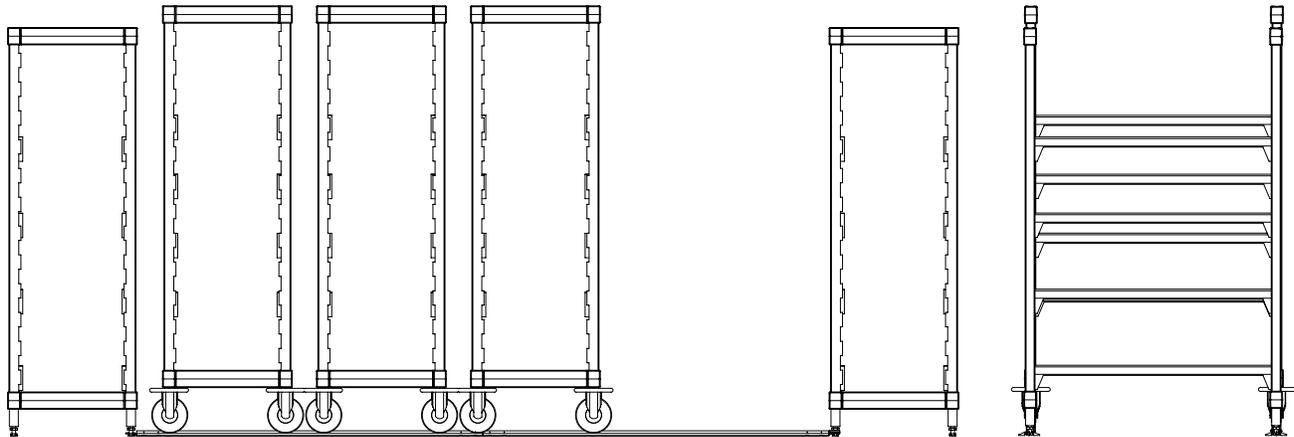

Side View

Front View

## Specifications

Dimension Tolerance: +/- 1/4" (0,64 cm)

CODE	DESCRIPTION	SIZE (D x L x H)	CASE LBS./CUBE KG/M³
<b>High Density Mobile Starter Units with Vented Shelves</b>			
CPHU244867V4	Mobile Unit 4 Vented Shelves	24" x 48" x 67" (610 x 1219,1 x 1701,8 mm)	113.00 (8,27) 51,36 (0,234)
CPHU244875V4	Mobile Unit 4 Vented Shelves	24" x 48" x 75" (610 x 1219,1 x 1905 mm)	108.00 (8,27) 49,09 (0,234)
CPHU244275V4	Mobile Unit 4 Vented Shelves	24" x 42" x 75" (610 x 1067 x 1905 mm)	107.74 (8,27) 48,97 (0,234)
CPHU243675V4	Mobile Unit 4 Vented Shelves	24" x 36" x 75" (610 x 914,1 x 1905 mm)	98.94 (8,27) 44,97 (0,234)
<b>High Density Mobile Starter Units with Solid Shelves</b>			
CPHU244867S4	Mobile Unit 4 Solid Shelves	24" x 48" x 67" (610 x 1219,1 x 1701,8 mm)	113.00 (8,27) 51,36 (0,234)
CPHU244875S4	Mobile Unit 4 Solid Shelves	24" x 48" x 75" (610 x 1219,1 x 1905 mm)	111.04 (8,27) 50,37 (0,234)
CPHU244275S4	Mobile Unit 4 Solid Shelves	24" x 42" x 75" (610 x 1067 x 1905 mm)	114.82 (8,27) 52,08 (0,234)
CPHU243675S4	Mobile Unit 4 Solid Shelves	24" x 36" x 75" (610 x 914,1 x 1905 mm)	105.62 (8,27) 47,91 (0,234)

Color: Speckled Gray (480)

## Architect Specs

- Posts:** Internal steel core, reinforced polypropylene exterior.  
**Post Connectors:** Reinforced polypropylene.  
**Traverses:** Internal steel core, reinforced polypropylene exterior.  
**Vented/Solid Shelf Plates:** Reinforced polypropylene with Camguard® Antimicrobial.  
**High Density Caster:** Polyolefin resin with zinc plated post.

CODE	DESCRIPTION	CASE PACK	CASE LBS./CUBE KG/M³
<b>Accessories</b>			
CSMHDDDB	High Density Donut Bumper	4	2.01 (0.05) 0,91 (0,001)
CPMCHD	High Density Caster	2	1.92 (0.174) 0,873 (0,005)

## Approvals



COMPONENTS



© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056-U.S.A.  
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003