

Camshelving®

84" (213,4 cm) Stationary – Vented Starter Units

5 Shelf Units, Vented Shelf Plates only
with Camguard® antimicrobial

1 Post Height

84" (213,4 cm)

1 Shelf Width

24" (61 cm)

5 Shelf Lengths

36", 42", 48", 54" and 60" (91,4 cm, 106,7 cm, 121,9 cm, 137,2 cm and 152,4 cm)

• Starter Unit includes:

- Two Post Kits
- Five Vented Shelf Kits (in one box)



Features & Benefits

Versatile Storage

For use in any environment, indoors or outdoors, including walk-in coolers and freezers, dry storage, wet areas or front of the house display. Works in temperatures down to -36°F (-30°C) or warm environments up to 190°F (88°C). Weldless and rust free.

Fits in Any Space

Units combine together in straight lines by sharing posts of existing units. Corner Connectors, made of reinforced nylon, connect units together in a 90° angle. Unique design maximizes valuable space and offers strength and stability. Simplify assembly and reduce costs by sharing posts of existing unit without the use of add-on clips or "S" hooks.

Easy to Clean

Camshelving shelf plates contain Camguard® antimicrobial, a silver-ion technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation. Camguard is incorporated throughout the shelf plate material so that it will never wash off or wear out. The shelf plates remove easily and can be placed in an open end Camrack® (OETR314) for washing. The traverses and post kits are smooth polypropylene so they can be wiped or steam cleaned. The traverses can be easily removed and washed in a conveyor dishwasher.

Easy to Assemble

Assembles in minutes with the use of a rubber mallet. Requires no bolts or nuts, clips or stainless steel connectors. Molded in dovetails on Posts ensure that Traverses set easily into place.

Strong as Steel

Posts and Traverses are made of a steel core coated with polypropylene. Uniquely engineered Post Connectors offer exceptional cross stabilization. Shelves up to 48" (121,9 cm) long hold up to 800 lbs. (363 kg) evenly distributed static weight. Shelves 54" - 60" (137,2 - 152,4 cm) long hold up to 600 lbs. (272 kg) each. Shelves connected by Corner Connectors hold 400 lbs. (182 kg) for any length.

Easy to Adjust

Requires use of rubber mallet. Shelves can be adjusted at 4" (10,2 cm) increments. Add a shelf to an existing unit by simply ordering the appropriate Shelf Kit. Sturdy reinforced nylon foot on bottom of each stationary Post adjusts easily for floor irregularities.

Optional Accessories

Includes Wall Fastener and Seismic Foot. Each are packed 4 per case. Identification Tags clip easily onto traverses. Dunnage stand recommended for heavy usage with shelves 54" (137,2 cm) or longer. Increases capacity of bottom shelf to 1,000 lbs. (450 kg).

Item No. _____

Specifier Identification No. _____


Code No. _____

Quantity _____



Five Shelf Starter Unit consists of two Post Kits and five Vented Shelf Kits.

Optional

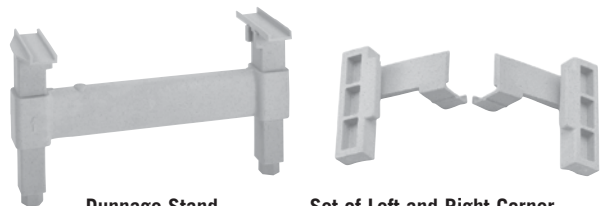

Dunnage Stand

Set of Left and Right Corner Connectors (1 set required per shelf).

Recommended for 54" to 60" (137,2 - 152,4 cm) shelf length. Holds up to 1,000 lbs. (454 kg).

Approvals



Components

* Does not include 6" (15 cm) Shelf Plate, Wall Fastener and Seismic Foot.

Camshelving®

84" (213,4 cm) Stationary – Vented Starter Units

5 Shelf Units, Vented Shelf Plates only
with Camguard® antimicrobial

1 Post Height

84" (213,4 cm)

1 Shelf Width

24" (61 cm)

5 Shelf Lengths

36", 42", 48", 54" and 60" (91,4 cm, 106,7 cm, 121,9 cm, 137,2 cm and 152,4 cm)

Starter Unit

84" (213,4 cm) Height

24" (61 cm) Width

*Due to the heavy weight of 84" (213,4 cm) shelving,
starter units will be shipped in multiple cartons.

Code	Traverse		2 Post Kits		5 Shelf Kits	
	in.	cm.	Case lbs. (Cube)	Case kg. (Cube m³)	Case lbs. (Cube)	Case kg. (Cube m³)
CSU54368PKG480	36"	91,4	42 (1.22)	18,51 (0,032)	60.6 (6.58)	27,49 (0,186)
CSU54428PKG480	42"	106,7	42 (1.22)	18,51 (0,032)	73.0 (7.85)	33,11 (0,222)
CSU54488PKG480	48"	121,9	42 (1.22)	18,51 (0,032)	80.0 (6.81)	36,29 (0,193)
CSU54548PKG480	54"	137,2	42 (1.22)	18,51 (0,032)	91.2 (8.41)	41,37 (0,238)
CSU54608PKG480	60"	152,4	42 (1.22)	18,51 (0,032)	101.6 (9.36)	46,08 (0,265)

These products ship in three separate cartons:

- Two post kits
- One carton containing five sets of shelf kits

Shelves up to 48" (121,9 cm) long hold up to 800 lbs. (363 kg) evenly distributed static weight. Shelves 54" - 60" (137,2 - 152,4 cm) long hold up to 600 lbs. (272 kg) each. Shelves connected by Corner Connectors hold 400 lbs. (182 kg) for any length.

Corner Connector Set

Case Pack: 1 set

Code	Description	Case lbs. (Cube)	Case kg. (Cube m³)
CSCC	Right and Left	0.38 (0.05)	0,02 (0,014)

Architect Specs

Posts:	Internal steel core, reinforced polypropylene exterior.
Post Connectors:	Reinforced polypropylene.
Traverses:	Internal steel core, reinforced polypropylene exterior.
Vented/Solid Shelf Plates:	Reinforced polypropylene with Camguard™ antimicrobial.
Corner Connectors:	Reinforced nylon.
Adjustable Foot:	Reinforced nylon.
Seismic Foot:	Stainless steel post and wide foot plate, 3 holes for bolts. (Bolts not provided)
Wall Fastener:	Stainless steel.

Item No. _____

Specifier Identification No. _____

Code No. _____

Quantity _____

Dunnage Stand

Case Pack: 1

6 1/2" (16,5 cm) Height

Code	Width	Case lbs. (Cube)	Case kg. (Cube m³)
CSDS24	24" (61,0 cm)	3.30 (0.30)	1,50 (0,0085)

Optional Accessories

Seismic Foot (Bolts not provided)	<input type="checkbox"/> CSEQ3	Color: Silver	Case pack: 4 each
Wall Fastener	<input type="checkbox"/> CSWF	Color: Silver	Case pack: 4 each
Identification Tag 6"	<input type="checkbox"/> CSID	Color: White/Clear	Case pack: 12 each
Identification Tag 3"	<input type="checkbox"/> CSID3	Color: White/Clear	Case pack: 12 each

Standard Colors

- Speckled Gray (480)

Approvals



Components

* Does not include 6" (15 cm) Shelf Plate,
Wall Fastener and Seismic Foot.