




Self-leveling Dispensers for TRAYS

CM-1418
CM-1418-C
CM-1520-C
CM-1622

CM-1622-C
CM-1814-C
CM-2015-C
CM-2216-C

CABINET SERIES / DECORA COLORS

Handsome appearance suitable for use in any dining room.

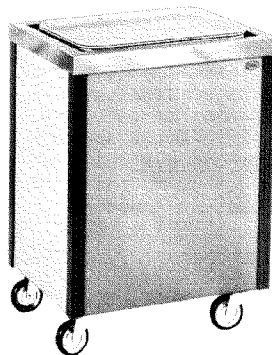

CM-1418
CM-1622

☐ **SERIES CM-1418.** To be 25 $\frac{3}{8}$ " long x 21 $\frac{1}{2}$ " wide x 34" high to accommodate trays up to 14" x 18". (Mechanism on 25 $\frac{3}{8}$ " side)

☐ **SERIES CM-1622.** To be 27" long x 23 $\frac{1}{2}$ " wide x 34" high to accommodate trays up to 16" x 22". (Mechanism on 27" side)

Capacity: Up to 75 trays *

SPECIFICATIONS (Both Series)

☐ Caddymagic self-leveling cabinet dispenser to be Caddy Corporation of America Series CM _____. (Insert series selection and description from above.) Dispenser to be of unitized construction with #16 gauge stainless steel top channeled down 2" on four sides. Corners of cabinet to have metal reinforced members with full height extruded plastic vertical corner bumpers. Bottom of cabinet to be #12 gauge rust-resistant metal, unitized with the four sides of cabinet enclosure. Bottom to have a 2 $\frac{1}{2}$ " center clean-out hole with a removable plug and fitted with four swivel casters of plated finish with 4" polyurethane tires (standard). Self-leveling mechanism to be cantilevered suspension type. Removable panel to be provided to permit easy calibration without tools for full load factors from 20 to 182 lbs. and without prior identification of trays regardless of weight or brand. Calibration mechanism to be totally free of cables, chains, pulleys, sprockets, gears, levers, crank handles or components


requiring periodic maintenance and lubrication. #18 gauge stainless steel removable load platform to be secured to #16 gauge angle support frame and a pair of cantilevered rust-resistant $\frac{1}{4}$ " steel suspension arms, securely guided by ball bearing rollers. Total stacking height to edge of top frame to be not less than 22". Exterior of cabinet to be (continue specifications and select finish desired).

☐ Stainless Steel ☐ Vinyl clad aluminum permanently bonded and finished in (select one)

- ☐ Textured Berry Red
- ☐ Danish Walnut Grain
- ☐ Textured Autumn Gold
- ☐ Textured Surf Blue

Dispenser to be provided with the following accessories:

(Conclude specifications with selection of accessories listed below)



CM-1814-C
CM-2015-C
CM-2216-C

CANTILEVER SERIES

☐ **SERIES CM-1814-C.** To be 31 $\frac{5}{8}$ " long x 16 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 14" x 18"

☐ **SERIES CM-2015-C.** To be 31 $\frac{5}{8}$ " long x 16 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 15" x 20"

☐ **SERIES CM-2216-C.** To be 31 $\frac{5}{8}$ " long x 16 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 16" x 22"

☐ **SERIES CM-1418-C.** To be 25 $\frac{3}{8}$ " long x 23 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 14" x 18"

☐ **SERIES CM-1520-C.** To be 25 $\frac{3}{8}$ " long x 23 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 15" x 20"

☐ **SERIES CM-1622-C.** To be 25 $\frac{3}{8}$ " long x 23 $\frac{1}{2}$ " wide x 35 $\frac{1}{2}$ " high to accommodate trays up to 16" x 22"

Capacity: Up to 75 trays *

*Actual capacities vary with shape of trays to be dispensed.

SPECIFICATIONS (All Series)

☐ Caddymagic self-leveling cantilever dispenser to be Caddy Corporation of America Series CM _____. (Insert series selection and description from above.) Dispenser mechanism to be totally free of cables, chains, pulleys, sprockets, gears, levers, crank handles or components requiring periodic maintenance and lubrication. #18 gauge stainless steel removable load platform to be secured to #16 gauge angle support frame and a pair of cantilevered rust-resistant $\frac{1}{4}$ " steel suspension arms, securely guided by ball bearing rollers. Total stacking height to top of housing to be not less than 22". Mechanism to be housed in #18 gauge stainless steel upright enclosure

with removable panel to permit easy calibration without tools for full load factors from 20 to 182 lbs. and without prior identification of wares regardless of shape, height or brand. The lower rack storage platform to be formed of #16 gauge stainless steel, channeled on all four sides with two stainless steel, reinforced members underneath to which four swivel casters of plated finish with 4" polyurethane tires (standard) are secured. Dispenser to be provided with the following accessories:

(Conclude specification with selection of accessories listed below.)

CM-1418-C
CM-1520-C
CM-1622-C

ACCESSORIES (Optional Extra)

- ☐ 5" Polyurethane Tires ACC-63 in lieu of 4" polyurethane. (Adds 1 $\frac{1}{8}$ " to height)
- ☐ Caster Brakes ACC-41 on two diagonal casters

- ☐ Perimeter Bumpers ACC-50 with replaceable corners. (Adds 1 $\frac{1}{4}$ " to length and width)
- ☐ Guides ACC-51 for automatic stacking of trays.
- ☐ Corner Bumpers ACC-52 only, easily replaceable. (Adds 1 $\frac{1}{4}$ " to length and width)



CADDY CORPORATION OF AMERICA
SUBSIDIARY SUN WAVE U.S.A. CO. LTD.

© 2/94 5M Printed in USA



CM-15