

Drying Racks

Cutting Board Drying Rack

ALUMINUM CONSTRUCTION

Item No. _____

Quantity _____

Job Name _____

Spec No. _____

Applications: Designed for the drying and storage of all different sizes and colors of cutting boards to prevent the possibility of cross contamination.

Construction: Heavy Duty, high tensile, extruded aluminum. Type 6063-T6 alloy. 3/4" thick thermoplastic poly top. Cylindrical aluminum rods, 3/8" thick and welded in place every 3 1/2" to insure separation of different cutting boards. Features a lifetime guarantee against rust. Shipped assembled and ready for immediate use.

Frame and Cross Supports: Vertical and horizontal frame sections are 1 1/4" square extruded aluminum tubing.


Casters: 5"x2" Heavy Duty, all swivel, non marking polyurethane with Zerk grease fitting for easy maintenance.

HD Caster Brakes are included.

Model	Spacing/ Openings	H	D	W	Weight
CBDR-6/P	3" / 6	36"	25 3/4"	25 3/4"	77



Custom Sizes Available

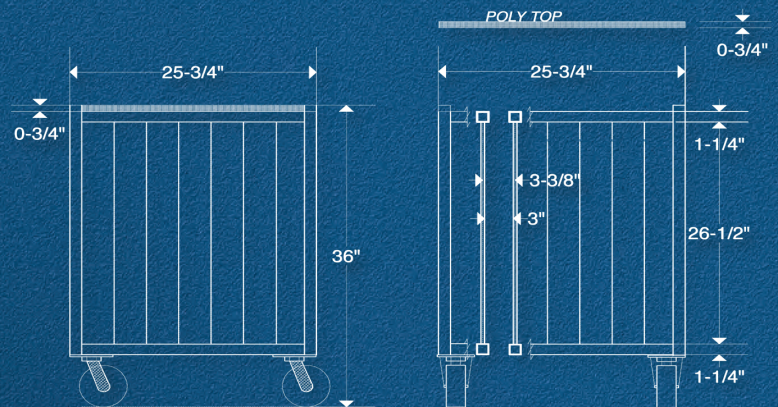

55 Channel Drive • Port Washington, NY 11050-2216
 8891 NW 102nd Street • Medley, FL 33178
 Tel: 516-944-6271 • Fax: 516-944-0625
 Toll Free: 866-712-7283
 www.channelmfg.com • Email: sales@channelmfg.com