



EV9799-02

# SS-10 Scale Inhibition Cartridge

Inhibits mineral scale deposits and prevents corrosion in water-fed equipment



SS-10 Cartridge: EV9799-02

## BENEFITS

Features Hydroblend™ compound, a unique blend that inhibits mineral scale deposits and provides corrosion protection in low flow water-fed equipment

Patented design (patent no. 5,580,448) dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

Unaffected by high temperatures, permitting a wide variety of applications

Integral feed cartridge fits most standard 10 inch housings

Translucent cartridge allows simple visual monitoring of product usage and ensures against wasteful premature cartridge replacement

SS-10 fits all current SR-X housings and all existing old style AR-X housings

## INSTALLATION TIPS

Housing not included.

Order Model A-10 Clear 10" Housing (EV9100-01) separately for temperatures less than 125°F

Make sure selected housing fits temperature/pressure conditions

Install vertically with black O-band seal up

Wrap ScaleStick® cartridges are shorter than standard ScaleStick® cartridges and do not have the O-band seal. They cannot be installed without the special filter wraps. Standard ScaleStick® cartridges cannot be installed into filter wraps

## OPERATION TIPS

Deliming of equipment prior to application is recommended, but not required

Inspect ScaleStick® cartridges at least every 6 months

Replace ScaleStick® before Hydroblend™ compound is completely dissolved

Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation

## APPLICATION/SIZING

For water-using equipment:

Steamers and Combi-ovens  
Ice Machines  
Coffee and Espresso Machines  
Proofers

# SS-10 Scale Inhibition Cartridge

## SPECIFICATIONS

### Dimensions:

10-1/16" H x 1-5/16" Diameter

### Service Flow Rate:

0.1 - 6 gpm

### Maximum Temperature:


150°F\*

\*If inlet feed water temperature is above 125°F a hot water housing must be used.

Note: Filter Wraps are not to be used in hot water feed applications.

\*\*The ScaleStick® trademark is used pursuant to an agreement between PWC Enterprises and Everpure, Inc.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

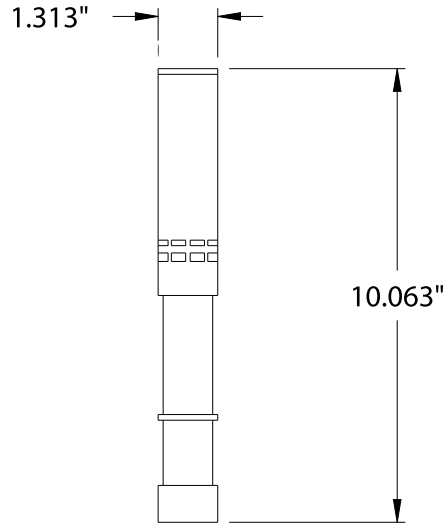

## WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



This SS-10 is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.  
**COMPONENT**



EVERPURE, INC.  
2375 Sanders Road  
Northbrook, IL 60062  
Toll Free (800) 323-7873  
Tel (847) 205-6000  
Fax (800) 942-0081  
<http://www.everpure.com>

*In Europe:*  
N.V. EVERPURE (EUROPE) S.A.  
Geldenaaksebaan 478  
B-3001 Heverlee  
Belgium  
Tel 32-16-401191  
FAX 32-16-402691

*In Japan:*  
EVERPURE JAPAN, INC.  
1-8-19, Tsumada Kita,  
1-Chome, Atsugi City  
Kanagawa Ken 243-0812  
Japan  
Tel 81-462-23-6563  
FAX 81-462-21-6775

Everpure, Inc.  
2375 Sanders Road  
Northbrook, IL 60062  
Phone: 800-323-7873 Fax: 800-942-0081