


THE "mini" COMBI OVEN-STEAMER
Stacking Kit for Electric Table Type Models
(OES 6.10 mini on OES 6.10 mini)

Project _____
 Item _____
 Quantity _____
 FCSI Section _____
 Approval _____
 Date _____



Model #	Description
CST2610MOB	for mounting two OES 6.10 mini models
CST2610MOBCA	for mounting two OES 6.10 mini models with casters

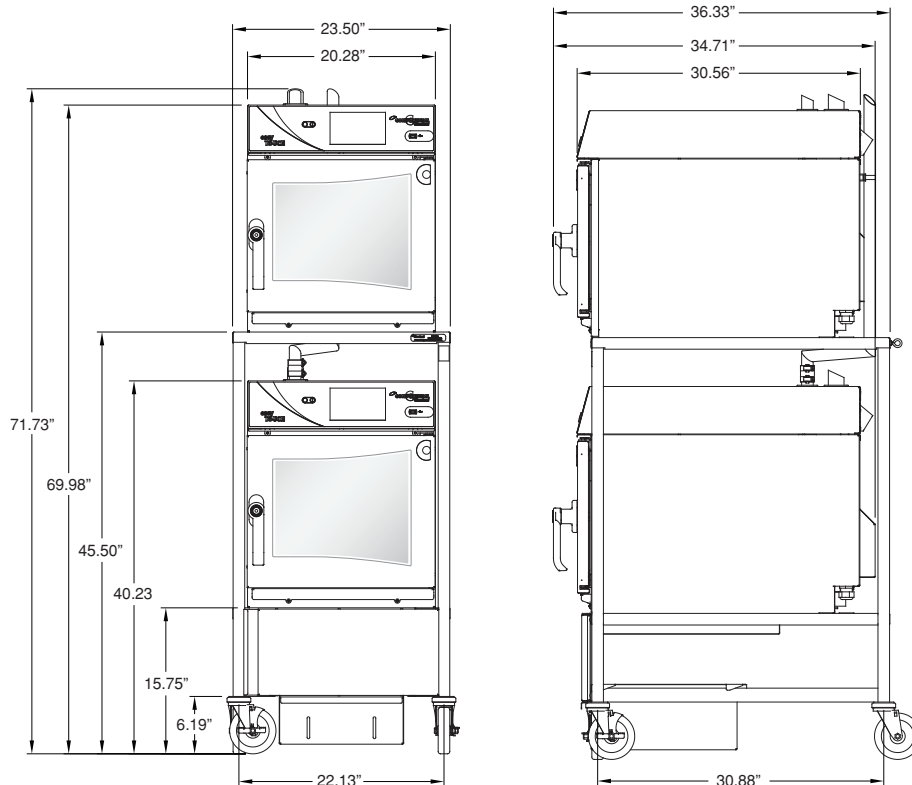

UTILITIES (Utility connection shown below are listed per unit)

ELECTRICAL CONNECTIONS

The 3 phase 208-240 volt units will be supplied with a 10 AWG, SOOW, 4 conductor 6 foot long cord. The customer will have to provide the NEMA plug (NEMA # 15-30P or L15-30P). Unit current rating 17.9 amps.

The 1 phase 208-220 volt units will be supplied with a 10 AWG, SOOW, 3 conductor 6 foot long cord. The customer will have to provide the NEMA plug (NEMA # 6-30P or L6-30P). Unit current rating 22.7 amps.

The 1 phase 240 volt units will be supplied with a 10 AWG, SOOW, 3 conductor 6 foot long cord. The customer will have to provide the NEMA plug (NEMA # 6-50P or L6-50P). Unit current rating 24.5 amps.

These units cannot be hard wired to the circuit box. They must have a NEMA plug to be connected to a mating NEMA receptacle (customer supplied) to comply with the U.L. and NEC electrical standards.

OPTIONS & ACCESSORIES

CSH2610 Smooth action spray hose for stacked units

COLD WATER CONNECTION

One 3/4" GHT (Garden Thread Hose) connection. Use NSF approved hose. 35 PSI minimum, 60 PSI maximum.

NOTE: The owner / operator / purchaser must ensure that the Water Quality Requirements are met. Not meeting the water quality requirements will void the original equipment warranty.

Water Quality Requirements:

TDS < 60 ppm	pH Factor 7.0 – 8.5
Total Alkalinity < 20 ppm	Free Chlorine < 0.1 ppm
Silica < 13 ppm	Conductivity min. 20 µS/cm (50 kOhms)
Chloride < 25 ppm	

DRAIN CONNECTION

1 1/2" tube.
 Do not connect other units to this drain.
 Drain line must be vented.

SERVICE CLEARANCES

3" left, 3" right, 3" rear, allow 20" on top for service.

