DISPLAY FREEZER (0°F)

Model: 1F-GD

1-Section Display Freezer with Hinged Glass Door

1F-GD - Stainless steel front, aluminum end panels and interior

1F-SA-GD - Stainless steel exterior, aluminum interior

1F-SS-GD - Stainless steel exterior and interior

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| (-1 3 | |
|---------------------------------------|---|
| Stainless steel case back | Remote models |
| Additional epoxy-coated steel shelves | Half glass doors |
| Chrome or stainless steel shelves | Pass-thru (consult factory) |
| Heavy-duty pilaster strips | Shallow depth |
| Rehinging of door (consult factory) | Solid door (full or half doors) |
| Pan slide assemblies | Increased refrigeration systems |
| Adjustable legs | Special electrical req. (consult factory) |
| Digital thermometer | |
| | |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

Thermal expansion valve

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated handle

Cam action, lift off hinges

Self-closing door

Magnetic snap-in door gasket

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

Triple-pane, tempered hinged glass door

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heater

Automatic electric defrost



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|--|------------------|
| Net Capacity (cu. ft.) | 20 (566 cu I) |
| Width, Overall (in.) | 26 (660 mm) |
| Depth, Overall (incl. handle) (in.) | 35 3/8 (899 mm) |
| Depth [less door] (in.) | 32 (813 mm) |
| Depth [door open 90°] (in.) | 55 1/2 (1410 mm) |
| Clear Door Width (in.) | 19 3/8 (492 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (incl. 5" casters) (in.) | 82 1/4 (2089 mm) |
| No. of Doors | 1 |
| No. of Shelves | 4 |
| Shelf Area (sq. ft.) | 20.4 (1.9 sq m) |
| Tray Slide Capacity (per section) | 24 ea. |
| REFRIGERANT DATA | |
| Condensing Unit Size (H.P.) | 1/2 |

Capacity (BTU/Hr)* **ELECTRICAL DATA**

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 11.4 (5.3) |
| Defrost Amps (int'l) | 5.2 (2.6) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

2470

| SHIPPING DATA | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 31 5/8 (803 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 65 (1841 cu I) |
| Weight Std - Crated (lbs.) | 330 (150 kg) |
| Weight SS - Crated (lbs.) | 390 (177 kg) |
| Weight Std - Uncrated (lbs.) | 230 (104 kg) |
| Weight SS - Uncrated (lbs.) | 290 (132 kg) |
| | |

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2015. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

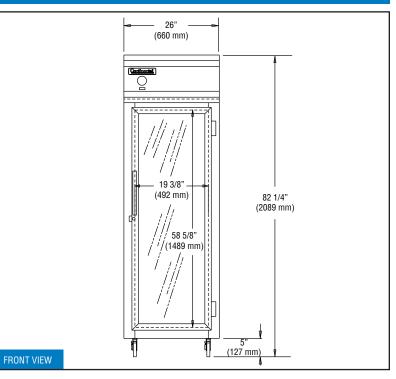

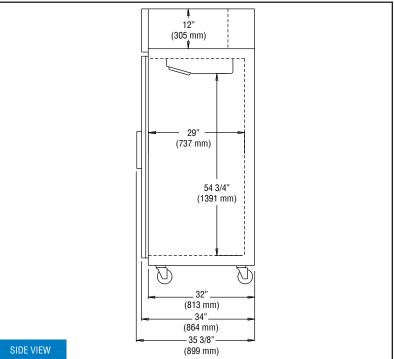

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.