# REACH-IN REFRIGERATOR

# Model: 1RE

# 1-Section Extra-Wide Reach-In Refrigerator

ENERGY STAR<sup>®</sup> Qualified Commercial Refrigerator

**1RE** - Stainless steel front, aluminum end panels and interior **1RE-SA** - Stainless steel exterior, aluminum interior **1RE-SS** - Stainless steel exterior and interior



# **Options and Accessories**

(upcharge and lead times may apply)		
Stainless steel case back	Half doors	
Additional epoxy-coated steel shelves	Pass-Thru	
Chrome or stainless steel shelves	Shallow depth	
Heavy-duty pilaster strips	Hinged glass door	
Pan slide assemblies	Increased refrigeration systems	
Expansion valve system	Special electrical req. (consult factory)	
Wine display	Correctional Facility Options	
Adjustable legs	One way security screws	
Digital thermometer	• Locking hasp (lock not included)	
Remote models	Stainless steel mesh cover	
Custom laminates	Coverless hinges	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

# **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Environmentally-safe R-134a refrigerant Self contained, performance-rated refrigeration system Automatic, electric condensate evaporator

### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation
Chrome-plated flow line handle
Cam action, lift off hinges
Self-closing door
Magnetic snap-in door gasket
Cylinder lock in door
Heavy-duty, epoxy-coated steel shelves
5" casters

### **MODEL FEATURES**

Automatic interior lighting External dial thermometer Energy saving switch for door heater Rehinging of door (in the field)

APPROVAL:

# **Model Specifications**


# **Model Plan Views**



DIMENSIONAL DATA	
Net Capacity (cu. ft.)	21 (595 cu l)
Width, Overall (in.)	28 1/2 (724 mm)
Depth, Overall (incl. handle) (in.)	35 3/8 (899 mm)
Depth [less door] (in.)	32 (813 mm)
Depth [door open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (incl. 5" casters) (in.)	82 1/4 (2089 mm)
No. of Door(s)	1
No. of Shelves	3
Shelf Area (sq. ft.)	20.4 (1.9 sq m)
Tray Slide Capacity	16 ea.
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.9 (3.5)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu l)
Weight Std - Crated (lbs.)	330 (150 kg)
Weight SS - Crated (Ibs.)	390 (177 kg)
Weight Std - Uncrated (lbs.)	230 (104 kg)
Weight SS - Uncrated (lbs.)	290 (132 kg)
* Bating @ +25°F evaporator 90°F ambient	

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2013. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

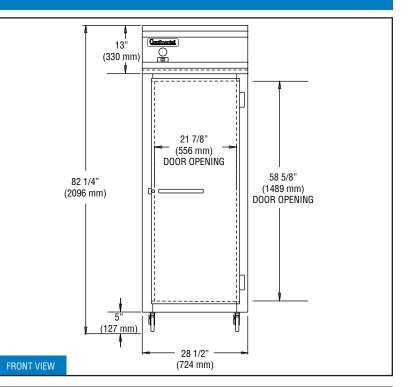

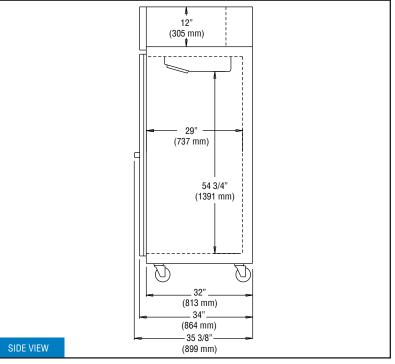

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required.