# **DISPLAY REFRIGERATOR**

## **Product Specifications**

# **1RES-GD-HD** - Extra-Wide Shallow Depth, Half Doors

One Section, Half Glass Doors, Self-Contained

Units available in one, two and three sections. All upright models contain 3" non-CFC polyurethane foam insulation. Our selection of Display Refrigerators are available in Standard Depth, Shallow Depth and Extra- Wide models.



#### **OPTIONS AND ACCESSORIES**

•	Stainless steel case back	•	Adjustable Legs
•	Pan slide assemblies	•	Full door
•	Increased refrigeration systems	•	Pass-Thru
•	Stainless steel shelves	•	Remote models
•	Digital thermometer	•	Standard depth
•	Rehinging of doors (consult factory)	•	Hinged glass doors
•	Expansion valve system	٠	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

DIM	IENO	IONA	L DATA	
DIN	IENS	IUNA	L DATA	

Net Capacity (cu. ft.)	18 (510 cu l)
Width, Overall (in.)	281/2 (724 mm)
Depth, Overall (incl. handles) (in.)	291/4 (743 mm)
Depth [less door(s)] (in.)	25 <sup>7</sup> /8 (657 mm)
Depth [door(s) open 90°] (in.)	49 <sup>1</sup> / <sub>2</sub> (1257 mm)
Clear Door Width (in.)	21 <sup>7</sup> /8 (556 mm)
Clear Full Door Height. (in.)	585/8 (1489 mm)
Clear Half Door Height. (in.)	271/2 (699 mm)
Height, Overall (incl. 5" casters) (in.)	821/4 (2089 mm)
No. of Half Door(s)	2
No. of Shelves	4
Shelf Area (sq. ft.)	20.4 (1.9 sq m)
Tray Slide Capacity (half)	11 ea.
Tray Slide Capacity (full)	24 ea.
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940
ELECTRICAL DATA	
Cabinet	115/60/1
Feed Wires (incl. ground)	3
Condensing Unit	115/60/1
Total Amps	6.9
Cabinet Amps	1.6
Power Supply Cord	Yes
SHIPPING DATA	
Height - Crated (in.)	851/2 (2172 mm)
Width - Crated (in.)	31⁵/ଃ (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - crated (cu. ft.)	65 (1841 cu l)
Weight Standard - Crated (lbs.)	310 (141 kg)
Weight SS - Crated (lbs.)	370 (168 kg)
Weight Standard - Uncrated (Ibs.)	210 (95 kg)
Weight SS - Uncrated (lbs.)	270 (122 kg)
* Pating @ , 25°E evaporator 00°E ambient	

\* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents.

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum clearance of 12" is required</u>.

Project Name:	
Model Specified:	
Location:	
Loouton.	
Item No:	Quantity:
APPROVAL:	

### **Standard Design Features**

#### **REFRIGERATION SYSTEM**

Environmentally-safe R-134a refrigerant

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Cam action, lift off hinges

#### Self-closing doors

Magnetic snap-in door gasket

Cylinder lock in door 5" casters

Heavy-duty epoxy-coated steel shelves

Double pane, tempered hinged glass doors

#### **MODEL FEATURES**

Flourescent interior lighting

External dial thermometer

Automatic, energy-saving, electric condensate evaporator

#### **STANDARD**

Stainless steel front, aluminum end panels and interior

#### **SUFFIX SA**


Stainless steel exterior, aluminum interior

#### SUFFIX SS

Stainless steel exterior and interior

# **DISPLAY REFRIGERATOR**

## **1RES-GD** - Extra Wide, Shallow Depth, Half Doors Blueprint

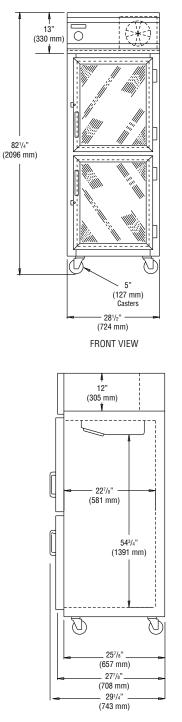

**RIGHT VIEW** 



Equipped with one NEMA-5-15P Plug

YEAR

WARRANTY ON PARTS

YEAR

change without notice.

MADE IN THE U.S.A.

This Continental Refrigerator product is warranted to be free from

all manufacturing defects, material or workmanship, for a period of

one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compres-

sor assemblies are warranted to be free from defects, material and

workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to

© Copyright 2011. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com 1RES-GD-HD (12/15/11)