

PASS-THRU FREEZER

2F-PT - Two Section Freezer Solid Doors, Self-Contained

Units available in one, two and three sections. All upright models contain 3" non-CFC polyurethane foam insulation. Our selection of Pass-Thru Freezers are available in Extra Wide models.



ENERGY STAR® Qualified Commercial Freezer

OPTIONS AND ACCESSORIES

• Stainless steel case back	• Expansion valve system
• Pan slide assemblies	• Adjustable Legs
• Increased refrigeration systems	• Half doors
• Stainless steel shelves	• Remote models
• Digital thermometer	• Hinged glass doors
• Rehinging of doors (<i>consult factory</i>)	• Special electrical requirements (<i>consult factory</i>)

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Product Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	48 (1359 cu l)
Width, Overall (in.)	52 (1321 mm)
Depth, Overall (incl. handles) (in.)	38 ³ / ₄ (984 mm)
Depth [less door(s)] (in.)	32 (813 mm)
Depth [door(s) open 90°] (in.)	79 (2007 mm)
Clear Door Width (in.)	19 ⁵ / ₈ (492 mm)
Clear Full Door Height. (in.)	58 ⁵ / ₈ (1489 mm)
Clear Half Door Height. (in.)	27 ¹ / ₂ (699 mm)
Height, Overall (incl. 5" casters) (in.)	82 ¹ / ₄ (2089 mm)
No. of Full Door(s)	4
No. of Half Door(s)	8
No. of Shelves	6
Shelf Area (sq. ft.)	40.8 (3.8 sq m)
Tray Slide Capacity (per half section)	8 ea.
Tray Slide Capacity (per full section)	16 ea.

REFRIGERANT DATA

Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr) *	2470

ELECTRICAL DATA

Cabinet	115/208-230/60/1
Feed Wires (incl. ground)	4
Condensing Unit	208-230/60/1
Total Amps	9.0
Cabinet Amps	2.6
Defrost Amps	6.5

SHIPPING DATA

Height - Crated (in.)	85 ¹ / ₂ (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - crated (cu. ft.)	133 (3766 cu l)
Weight Standard - Crated (lbs.)	665 (302 kg)
Weight SS - Crated (lbs.)	745 (338 kg)
Weight Standard - Uncrated (lbs.)	495 (225 kg)
Weight SS - Uncrated (lbs.)	575 (261 kg)

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents.

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

APPROVAL:

Standard Design Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated flow line handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gasket

Cylinder lock in each door

5" casters

Heavy-duty epoxy-coated steel shelves

MODEL FEATURES

Automatic interior lighting

External dial thermometer

Automatic, energy-saving, non-electric condensate evaporator

Automatic electric defrost

Energy saving switch for door heaters

ELECTRICAL

Completely pre-wired at factory for connection to 115/60/1 phase, 15 amp dedicated outlet

10 ft. cord and plug set included, 90° plug

STANDARD

Stainless steel front, aluminum end panels and interior

SUFFIX SA

Stainless steel exterior, aluminum interior

SUFFIX SS

Stainless steel exterior and interior



Equipped with one NEMA-5-15P Plug



This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.




MADE IN THE U.S.A.


© Copyright 2011. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

PASS-THRU FREEZER

2F-PT - Two Section Freezer Model Blueprint

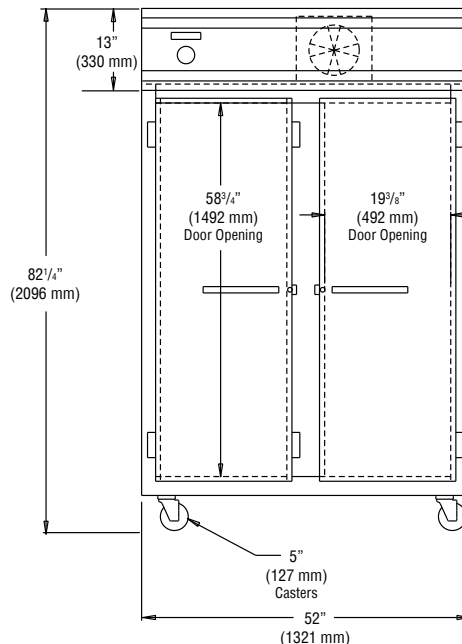

FRONT VIEW

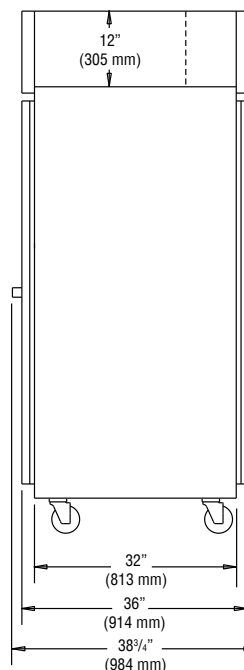

SIDE VIEW

Continental

Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

2F-PT (5/10/11)