

REACH-IN FREEZER

Product Specifications

3FE - Extra Wide Freezer Solid Doors, Self-Contained

Units available in one, two and three sections. All upright models contain 3" non-CFC polyurethane foam insulation. Our selection of Reach-In Freezers are available in standard and Shallow Depth.



OPTIONS AND ACCESSORIES

- | | |
|---|--|
| • Stainless steel case back | • Adjustable Legs |
| • Pan slide assemblies | • Half doors |
| • Increased refrigeration systems | • Pass-Thru |
| • Stainless steel shelves | • Remote models |
| • Digital thermometer | • Shallow-Depth |
| • Rehinging of doors (<i>consult factory</i>) | • Hinged glass doors |
| • Expansion valve system | • Special electrical requirements (<i>consult factory</i>) |

Consult factory for other model configurations, options and accessories.

DIMENSIONAL DATA

Net Capacity (cu. ft.)	73 (2067 cu l)
Width, Overall (in.)	85½ (2172 mm)
Depth, Overall (incl. handles) (in.)	35⅝ (899 mm)
Depth [less door(s)] (in.)	32 (813 mm)
Depth [door(s) open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21⅞ (556 mm)
Clear Full Door Height. (in.)	58⅝ (1489 mm)
Clear Half Door Height. (in.)	27½ (699 mm)
Height, Overall (incl. 5" casters) (in.)	82¼ (2089 mm)
No. of Full Door(s)	3
No. of Half Door(s)	6
No. of Shelves	9
Shelf Area (sq. ft.)	61.2 (5.7 sq m)
Tray Slide Capacity (per half section)	8 ea.
Tray Slide Capacity (per full section)	16 ea.

REFRIGERANT DATA

Condensing Unit Size (H.P.)	¾
Capacity (BTU/Hr)*	3575

ELECTRICAL DATA

Cabinet	115/208-230/60/1
Feed Wires (incl. ground)	4
Condensing Unit	208-230/60/1
Total Amps	12.1
Cabinet Amps	2.9
Defrost Amps	9.6

SHIPPING DATA

Height - Crated (in.)	85½ (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - crated (cu. ft.)	187 (5295 cu l)
Weight Standard - Crated (lbs.)	850 (386 kg)
Weight SS - Crated (lbs.)	965 (438 kg)
Weight Standard - Uncrated (lbs.)	640 (290 kg)
Weight SS - Uncrated (lbs.)	755 (342 kg)

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents.

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a **minimum clearance of 12"** is required.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

APPROVAL:

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Standard Design Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated flow line handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gasket

Cylinder lock in each door

5" casters

Heavy-duty epoxy-coated steel shelves

MODEL FEATURES

Automatic interior lighting

External dial thermometer

Automatic, energy-saving, electric condensate evaporator

Automatic electric defrost

Energy saving switch for door heaters

STANDARD

Stainless steel front, aluminum end panels and interior

SUFFIX SA


Stainless steel exterior, aluminum interior

SUFFIX SS


Stainless steel exterior and interior

REACH-IN FREEZER

3FE - Extra Wide Freezer Model Blueprint

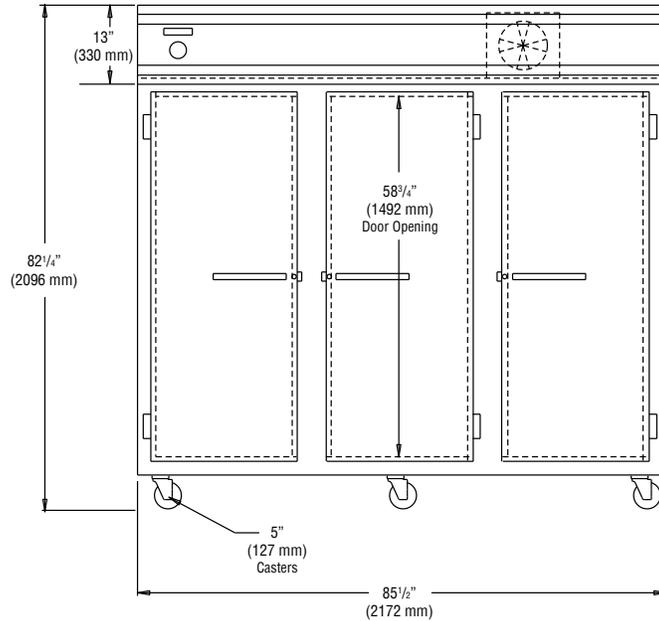

FRONT VIEW

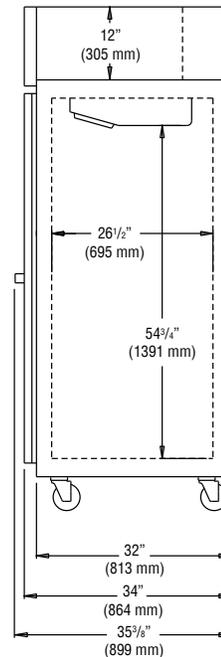

SIDE VIEW



This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2011. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Continental

Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com