

DISPLAY REFRIGERATOR

3RS-GD - 3-Section Refrigerator Shallow Depth

Glass Doors, Self-Contained

Three section upright display refrigerator model with stainless steel front, aluminum end panels and interior (Standard model), 5" casters and 3" non-CFC polyurethane foam insulation.



OPTIONS AND ACCESSORIES

- | | |
|--|--|
| • Stainless steel case back | • Expansion valve system |
| • Heavy-duty pilaster strips | • Adjustable Legs |
| • Increased refrigeration systems | • Wine display |
| • Chrome or stainless steel shelves | • Remote models |
| • Digital thermometer | • Special electrical requirements
(consult factory) |
| • Rehinging of doors (consult factory) | |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Product Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	50 (1416 cu l)
Width, Overall (in.)	78 (1981 mm)
Depth, Overall (incl. handles) (in.)	29 ¹ / ₄ (743 mm)
Depth [less door(s)] (in.)	25 ⁷ / ₈ (657 mm)
Depth [door(s) open 90°] (in.)	49 ³ / ₈ (1254 mm)
Clear Door Width (in.)	19 ³ / ₈ (492 mm)
Clear Full Door Height. (in.)	58 ⁵ / ₈ (1489 mm)
Height, Overall (incl. 5" casters) (in.)	85 ³ / ₄ (2178 mm)
No. of Full Door(s)	3
No. of Shelves	12
Shelf Area (sq. ft.)	61.2 (5.7 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	³ / ₄
Capacity (BTU/Hr)*	5930

ELECTRICAL DATA

Cabinet	115/208-230/60/1
Feed Wires (incl. ground)	4
Condensing Unit	208-230/60/1
Total Amps	12.4
Cabinet Amps	5.4
Power Cord Supplied	No

SHIPPING DATA

Height - Crated (in.)	89 (2261 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1829 mm)
Volume - crated (cu. ft.)	187 (5295 cu l)
Weight Standard - Crated (lbs.)	740 (336 kg)
Weight SS - Crated (lbs.)	855 (388 kg)
Weight Standard - Uncrated (lbs.)	530 (240 kg)
Weight SS - Uncrated (lbs.)	645 (293 kg)

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents.

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

APPROVAL:

Standard Design Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated flow line handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

5" casters

Heavy-duty epoxy-coated steel shelves

Double pane, tempered hinged glass doors

MODEL FEATURES

Flourescent interior lighting

External dial thermometer

Automatic, energy-saving, electric condensate evaporator

STANDARD

Stainless steel front, aluminum end panels and interior

SUFFIX SA


Stainless steel exterior, aluminum interior

SUFFIX SS


Stainless steel exterior and interior

DISPLAY REFRIGERATOR

3RS-GD - 3-Section Refrigerator Shallow Depth Model

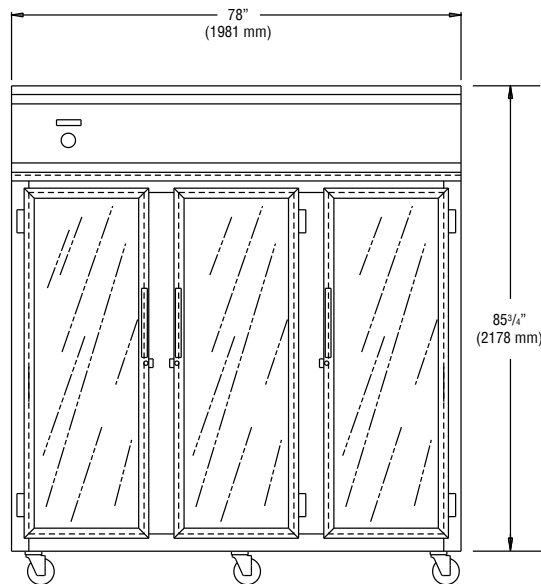

FRONT VIEW

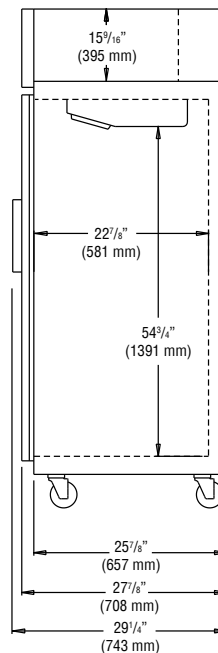

SIDE VIEW



This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2012. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Continental

Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

3RS-GD (4/27/12)