BACK BAR EQUIPMENT

Model: **BBC79S**

79" Back Bar Cooler - Shallow Depth

Textured baked enamel finish (black) exterior with all stainless steel countertop, heavy-duty galvanized interior with reinforced stainless steel floor.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

| (upcharge and lead times may apply) | |
|---|------------------------|
| Stainless steel exterior (-SS models) | Wine rack |
| Food storage rated stainless steel interior (NSF-7) | Remote models |
| Glass doors in lieu of solid doors | Expansion valve system |
| Add'l epoxy-coated shelves with clips | Casters or legs |
| Stainless steel shelves with clips | Standard depth |
| Automatic, electric condensate evaporator | Pass-thru |
| Condensing unit on right | |



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name: Model Specified: Location: |
|--|
| |
| |
| |
| |
| Location: |
| Location: |
| |
| |
| |
| |
| Item No: Quantity: |
| |
| |
| AIA #: SIS #: |

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated **front breathing** refrigeration system Environmentally-safe R-134a refrigerant Full length, extra large coil Automatic, energy-saving, non-electric condensate evaporator

CABINET ARCHITECTURE

High density, non-CFC polyurethane
foamed-in-place insulationHeavy-duty, epoxy-coated steel shelvesMagnetic snap-in gasket (each door)Cylinder-keyed security lock (each door)Stainless steel reinforced threshold

MODEL FEATURES

Easily accessible and serviceable slide-out condensing unit Removable front, rear and side venting louvered panels Interior light

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA

| Net Capacity (cu. ft.) | 22 (623 cu l) |
|---|-----------------|
| Width, Overall (in.) | 79 (2007 mm) |
| Depth, Overall (in.) (incl. handles & bumpers) | 25 1/4 (641 mm) |
| Depth, Body Only (in.) (less doors) | 21 (533 mm) |
| Height, Overall (in.) (not incl. columns) | 36 3/4 (933 mm) |
| No. of Doors | 3 |
| No. of Shelves | 6 |
| | |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/3 |
|-----------------------------|------|
| Capacity (BTU/Hr)* | 2500 |

ELECTRICAL DATA

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 6.7 (5.0) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| Weight (lbs.) | 455 (206 kg) |
|-----------------------|--------------|
| Height - Crated (in.) | 46 (1168 mm) |
| Width - Crated (in.) | 88 (2235 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


MADE IN THE U.S.A.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek

© Copyright 2015. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

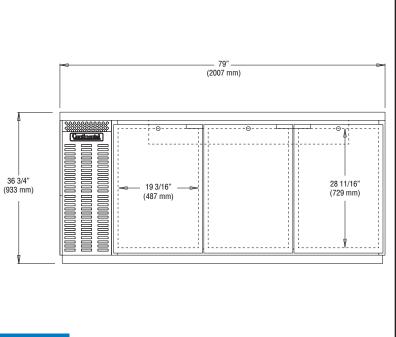

FRONT VIEW

