BACK BAR EQUIPMENT

Product Specifications

BBUC59S-GD - Undercounter, Shallow Depth Display Cooler

with Hinged Glass Doors

Cabinet construction consist of wear resistant, textured baked enamel finish (black) with aluminum top.

All models are front breathing with refrigeration available on left or right.



OPTIONS AND ACCESSORIES

6" adjustable legs	Electric condensate evaporator
Locking casters	 Condensing unit on right
Epoxy-coated shelves with clips	Wine Rack
Stainless steel shelves with clips	Remote models
Expansion valve system	 Food storage rated stainless steel interior (NSF-7)
Sliding glass door lock	

Continental
Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	15 (425 cu I)
Width, Overall (in.)	59 (1499 mm)
Barrel Capacity (# Barrel Type Kegs)	2
Straight Wall Capacity (# Straight Wall Kegs)	3
Depth, Overall (incl. handles & bumpers) (in.)	24 ⁵ / ₈ (625 mm)
Height, Overall (in.)	34 ¹⁵ / ₁₆ (887 mm)
No. of Door(s)	2
No. of Shelves	4
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2025
ELECTRICAL DATA	
Cabinet	115/60/1
Feed Wires (incl. ground)	3
Condensing Unit	115/60/1
Total Amps	7.0
Cabinet Amps	2.4
SHIPPING DATA	
Weight (lbs.)	395 (179 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	65 (1651 mm)

42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents.

Depth - Crated (in.)

Project Name:	
Model Specified:	
Location:	
Lucation.	
Item No:	Quantity:
APPROVAL:	

Standard Design Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

CABINET ARCHITECTURE

High density, non-CFC polyurethane foam insulation

Wear resistant, textured baked enamel finish (black)

Aluminum top

Heavy-duty galvanized steel interior with reinforced stainless steel floor

Heavy-duty epoxy-coated steel shelves

Hinged glass doors

MODEL FEATURES

Front breathing

Easily accessible and serviceable slide-out condensing unit

Automatic, energy-saving, electric condensate evaporator

Front, rear and side venting louvers allow greater condenser air flow for tight fit installations

Flourescent interior lighting

Extra large fin evaporator coil provides uniform air flow distribution to maintain constant product temperature and quick recovery

ELECTRICAL

Completely pre-wired at factory for connection to 115/60/1 phase, 15 amp dedicated outlet $\,$

10 ft. cord and plug set included, 90° plug



Equipped with one NEMA-5-15P Plug





This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.








© Copyright 2011. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

BACK BAR EQUIPMENT


BBUC59S-GD - Undercounter

Model Blueprint

Shallow Depth Display with Hinged Glass Doors



FRONT VIEW

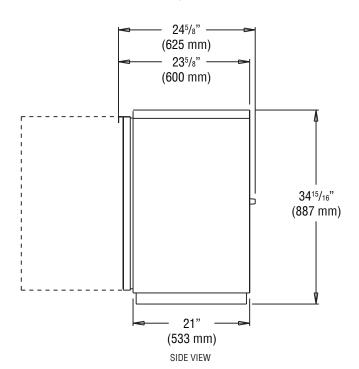



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com