

BACK BAR EQUIPMENT

Product Specifications

BBUC69-SGD-PT - Undercounter, Pass-Thru Display Cooler with Sliding Glass Doors

Wear resistant, textured baked enamel finish (black) with aluminum subtop. Heavy-duty galvanized steel interior with reinforced stainless steel floor. All models are front breathing with refrigeration available on left or right.



DIMENSIONAL DATA

Net Capacity (cu. ft.)	26 (736 cu l)
Width, Overall (in.)	69 (1753 mm)
Barrel Capacity (# Barrel Type Kegs)	3
Straight Wall Capacity (# Straight Wall Kegs)	3
Depth, Overall (incl. handles) (in.)	25 ¹⁹ / ₁₆ (656 mm)
Height, Overall (in.)	34 ¹⁵ / ₁₆ (887 mm)
No. of Door(s)	4
No. of Shelves	4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2250

ELECTRICAL DATA

Cabinet	115/60/1
Feed Wires (incl. ground)	3
Condensing Unit	115/60/1
Total Amps	10.3
Cabinet Amps	2.4

SHIPPING DATA

Weight (lbs.)	425 (193 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	78 (1981 mm)
Depth - Crated (in.)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents.

OPTIONS AND ACCESSORIES

• 6" Adjustable legs	• Condensing unit on right
• 4" Locking casters	• Wine Rack
• Additional epoxy-coated shelves with clips	• Remote models
• Stainless steel shelves with clips	• Shallow depth
• Expansion valve system	• Food storage rated stainless steel interior (NSF-7)
• Automatic electric condensate vaporizer	• -SS models - stainless steel exterior
• Cylinder-keyed security locks	• Magnetic snap-in door gaskets

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No: Quantity:

APPROVAL:

Standard Design Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Wear resistant, textured baked enamel finish (black)

Aluminum sub top

Heavy-duty galvanized steel interior with reinforced stainless steel floor

Heavy-duty, adjustable, epoxy-coated steel shelves

Stainless steel reinforced threshold sills for ease of loading

MODEL FEATURES

Front breathing

Easily accessible and serviceable slide-out condensing unit

Automatic, energy-saving, non-electric condensate evaporator

Front, rear and side venting louvers allow greater condenser air flow for tight fit installations

Flourescent interior lighting

Extra large fin evaporator coil provides uniform air flow distribution to maintain constant product temperature and quick recovery

ELECTRICAL

Completely pre-wired at factory for connection to 115/60/1 phase, 15 amp dedicated outlet

10 ft. cord and plug set included, 90° plug




Equipped with one NEMA-5-15P Plug


BACK BAR EQUIPMENT

BBUC69-SGD-PT - Undercounter Model Blueprint

Pass-Thru Display with Sliding Glass Doors

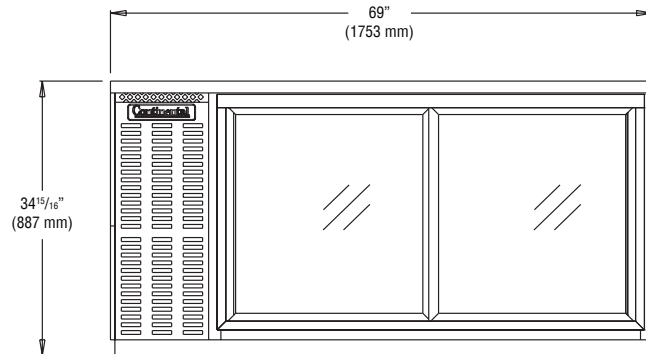

FRONT VIEW

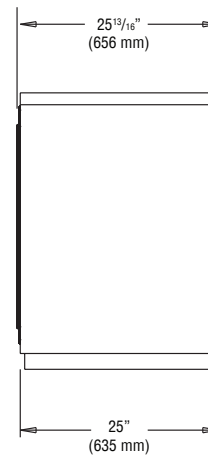

SIDE VIEW

1 YEAR
WARRANTY
ON PARTS

5 YEAR
WARRANTY
COMPRESSOR

This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2011. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

BBUC69-SGD-PT (6/8/11)