BASE MODEL SANDWICH UNIT

Model: CRA60-10-D

60" Standard Top Sandwich Unit Refrigerator with Drawers - 10 Pans

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Door in lieu of drawers (larger width section)	Expansion valve system
Drawer section above the condensing unit*	Stainless steel shelves
Overshelves (single or double)	Flat insulated night cover
Condensing unit left or right	Remote models
Additional epoxy-coated steel shelves	Door/drawers locks
Automatic, electric condensate evaporator	Adjustable legs
Exterior dial or digital thermometer	Crumb catcher
Rear-mounted cutting board	Front breathing
Stainless steel pan slides (larger width section only)	

^{*}Drawer section above condensing unit holds (1) 12 x 20 x 6 pan



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap-in door/drawer gaskets

Heavy-duty, epoxy-coated steel shelves

Stainless steel roll-out drawers

12" deep, full length nylon cutting board

Insulated lid

5" casters

Completely enclosed, vented and removable rear and side grills

Refrigerated door section above the condensing unit

MODEL FEATURES

(10) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable doors

NOTE: CRA60-D models come standard with a door over the condensing unit, a smaller width solid door on the left section and two tier drawers in the center section. A drawer over the condensing unit is an option. The option of having the door/drawers located in the opposite sections MUST be indicated at the time of ordering.

APPROVAL:

	Model	Specific	atioi

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	19 (538 cu I)
1/6 Size Pans (4" deep)	10
Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. handles & bumpers)	36 1/16 (916 mm)
Depth, Cutting Board (in.)	12 (305 mm)
Height, Overall (in.) (incl. 5" casters)	42 (1067 mm)
Shelf Area (sq. ft.)	5.6 (.5 sq m)
No. of Shelves	2
No. of Shelves No. of Full Doors / Drawers	1/2
	_
No. of Full Doors / Drawers	1/2
No. of Full Doors / Drawers No. of Half Doors	1/2
No. of Full Doors / Drawers No. of Half Doors Interior Depth (in.)	1 / 2 1 30 (762 mm)
No. of Full Doors / Drawers No. of Half Doors Interior Depth (in.) Interior Height (in.) (smaller section)	1 / 2 1 30 (762 mm) 26 (660 mm)
No. of Full Doors / Drawers No. of Half Doors Interior Depth (in.) Interior Height (in.) (smaller section) Interior Height (in.) (above condenser)	1 / 2 1 30 (762 mm) 26 (660 mm) 12 1/2 (318 mm)

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2300

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	6.7 (3.2)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

OIIII I ING DATA	
Weight (lbs.)	420 (191 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	62 (1575 mm)
Depth - Crated (in.)	47 (1194 mm)

DRAWER PAN CONFIGURATIONS


Two Tier: (1) 12 x 20 x 6 pan & (3) 1/6 x 6 pans (top) (2) 12 x 20 x 6 pans (bottom). Three tier not available.


* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Model Plan Views

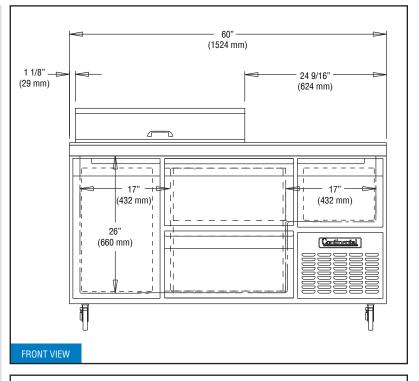

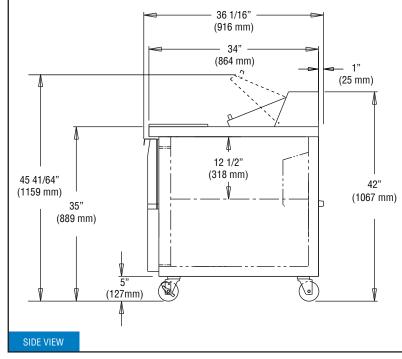

Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









