BASE MODEL SANDWICH UNITS

Model: CRA93-12M

93" Mighty Top Base Model Sandwich Unit Refrigerator with Solid Doors - 12 Pans

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.

Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Drawers in lieu of doors	Stainless steel pan slides	
Drawer section above the condensing unit*	Expansion valve system	
Overshelves (single or double)	Stainless steel shelves	
Condensing unit left or right	Flat insulated night cover	
Additional epoxy-coated steel shelves	Remote models	
Automatic, electric condensate evaporator	Door locks	
Exterior dial or digital thermometer	Adjustable legs	
Rear-mounted cutting board	Crumb catcher	
Stainless steel back and interior	Front breathing	

^{*}Drawer section above condensing unit holds (1) $12 \times 20 \times 6$ pan



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Pro	iect	Na	me
	,		

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

10" deep, full length nylon cutting board

Insulated lid

5" casters

Completely enclosed, vented and removable rear and side grills

Refrigerated door section above the condensing unit

MODEL FEATURES

(12) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable doors

NOTE: CRA models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA 32 (906 cu I) Net Capacity (cu. ft.) 1/6 Size Pans (4" deep) 12 Width, Overall (in.) 93 (2362 mm) Depth, Overall (in.) 36 1/16 (916 mm) (incl. handles & bumpers) Depth, Cutting Board (in.) 10 (254 mm) Height, Overall (in.) (incl. 5" casters) 42 (1067 mm) Shelf Area (sq. ft.) 14.2 (1.3 sq m) No. of Shelves 6 3 No. of Full Doors 1 No. of Half Doors Interior Depth (in.) 30 (762 mm) Interior Height (in.) 26 (660 mm) Interior Height (in.) (above condenser) 12 1/2 (318 mm) Interior Width (in.) 89 (2261 mm)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2	
Capacity (BTU/Hr)*	4220	

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Fans	4
Total Amps (int'l)	13.0 (6.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)


SHIPPING DATA


Weight (lbs.)	605 (274 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	95 (2413 mm)
Depth - Crated (in.)	47 (1194 mm)

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

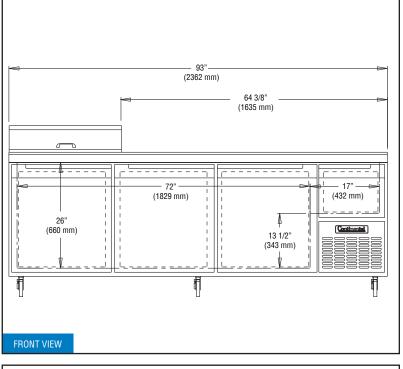

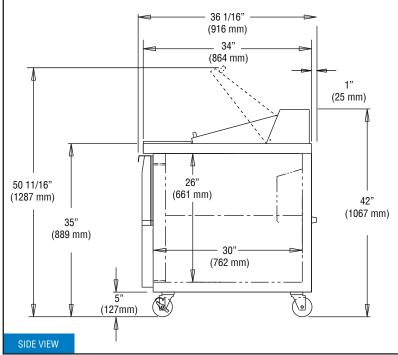



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









