

Continental

Refrigerator

Designer-line
REFRIGERATOR/FREEZER

**OVER/UNDER
DUAL TEMP
REFRIGERATOR/FREEZER**

Utilizing Environmentally Safe, CFC-free R-134a/ R-404a Refrigerant

Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration Systems
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Magnetic Snap-In Door Gaskets
- Cylinder Lock In Each Door
- Automatic Electric Condensate Evaporator
- Adjustable 6" Stainless Steel Legs
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Digital Thermometers
- Automatic Electric Defrost On Freezer Systems
- Automatic Interior Lighting



DL1RF-SS



DL1RFE-SS

Models Available

- Remote
- Hinged Glass Door
- Consult Factory

OTHER MODELS AVAILABLE

- DL1RFX-SS

Standard (S/S Front, Aluminum Ends & Interior)
Suffix SA (S/S Exterior, Aluminum Interior)
Suffix SS (S/S Exterior & Interior)

Refrigeration System

Two "performance rated", air cooled, hermetically sealed, capillary-type refrigeration systems are installed on the top of each dual temp. Plasticized fin coil and air circulating fans are contained within an easily accessible, low-profile, interior ceiling mounted housing. Both refrigeration systems are fully charged with refrigerant and evenly matched providing equal air distribution. Refrigerator sections are designed to maintain 38-40 degrees Fahrenheit (3 to 5 degrees Centigrade), and Freezer sections 0 degrees Fahrenheit (-18 degrees Centigrade) while operating with an unrestricted air supply in a maximum ambient temperature of 100 degrees Fahrenheit. Freezer systems have an automatic electric defrost timer which initiates defrost cycles at pre-determined intervals. All condensate water is directed to the cabinet bottom for connection to an automatic thermostatically controlled evaporator which is supplied with each model. A strict quality-assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

Cabinet Construction

All materials are of top quality, assembled to conform with strict quality-assurance requirements. The cabinet front and doors are constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminates overlapping panels with raw edges. Cabinet body, and doors are insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Full length louvered air grille located above the doors allows equal air circulation to the condensing units. Easily removable, low wattage, anti-sweat door heaters concealed by a non-metallic, non-conductive, high-impact thermal breaker strip eliminate condensate build up on the cabinet front. Automatic interior lighting is controlled by door openings. Cabinets are equipped with 6-inch adjustable stainless steel legs.

Shelving

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced 3/4" apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life. Adjustments are in 1/2 inch increments and a wide door opening allows the use of a variety of optional pan and tray slide types.

Door Construction

Door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam-action, lift-off type featuring positive safety stop at 120 degrees.



Designerline

REFRIGERATOR/FREEZER

| | | |
|----------------|-----------------|-----------------|
| MODEL DL1RF-SS | MODEL DL1RFX-SS | MODEL DL1RFE-SS |
| ONE SECTION | ONE SECTION | ONE SECTION |
| Reach-In | Reach-In | Reach-In |

CHARACTERISTICS

DIMENSIONAL DATA

| | | | |
|--------------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Net Capacity (cu. ft.) Refrigerator | 10 | 16 | 11 |
| Net Capacity (cu.ft.) Freezer | 10 | 16 | 11 |
| Width, Overall (in.) | 26 | 36 ¹ / ₄ | 28 ¹ / ₂ |
| Depth, Overall (Incl. Hdls.) (in.) | 35 ¹ / ₂ | 35 ¹ / ₂ | 35 ¹ / ₂ |
| Depth (Less Door(s) (in.) | 32 | 32 | 32 |
| Depth (Doors(s) Open 90°) (in.) | 55 ¹ / ₂ | 66 | 58 |
| Clear Door Width (in.) | 19 ³ / ₈ | 29 ⁵ / ₈ | 21 ⁷ / ₈ |
| Clear Half-Door Height (in.) | 27 ¹ / ₂ | 27 ¹ / ₂ | 27 ¹ / ₂ |
| Height, Overall (Incl. 6" Legs)(in.) | 83 ¹ / ₄ | 83 ¹ / ₄ | 83 ¹ / ₄ |
| Half Doors | 2 | 2 | 2 |
| Shelves | 4 | 4 | 4 |
| Shelf Area (sq. ft.) | 10.2 | 24.4 | 10.2 |
| Tray Slide Capacity (Half) | 11ea. | 11ea. | 11ea. |

REFRIGERATION DATA

| | | | |
|----------------------------------|------|------|------|
| Condensing Unit Size (H.P.) Ref. | 1/5 | 1/4 | 1/5 |
| Condensing Unit Size (H.P.) Frz. | 1/4 | 1/3 | 1/4 |
| Capacity (BTU/hr)*Ref. | 1725 | 1940 | 1725 |
| Capacity (BTU/hr)*Frz. | 1250 | 1590 | 1250 |

ELECTRICAL DATA

| | | | |
|---------------------------|----------|----------|----------|
| Cabinet Specifications | 115/60/1 | 115/60/1 | 115/60/1 |
| Feed Wires (Incl. Ground) | 3/3 | 3/3 | 3/3 |
| Condensing Unit Specs. | 115/60/1 | 115/60/1 | 115/60/1 |
| Total Amperes | 5.3/5.4 | 6.9/7.6 | 5.3/5.4 |
| Cabinet Amperes | .9/1.9 | 1.6/1.6 | .9/1.9 |
| Defrost Amperes | 5.2 | 6.5 | 5.2 |
| Power Supply Cord | yes/yes | yes/yes | yes/yes |

SHIPPING DATA


| | | | |
|------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Height – crated (in.) | 85 ¹ / ₂ | 85 ¹ / ₂ | 85 ¹ / ₂ |
| Width – crated (in.) | 31 ⁵ / ₈ | 42 | 31 ⁵ / ₈ |
| Depth – crated (in.) | 42 | 42 | 42 |
| Volume – crated (cu.ft.) | 66 | 87 | 66 |
| Weight Std – crated (lbs.) | 420 | 440 | 420 |
| Weight SS – crated (lbs.) | 480 | 500 | 480 |
| Weight Std – uncrated (lbs.) | 320 | 340 | 320 |
| Weight SS – uncrated (lbs.) | 380 | 400 | 380 |

*Rating @ +25° F Evaporator, 90° Ambient (Refrigerator)

*Rating @ -15° F Evaporator, 90° Ambient (Freezer)


Note: All specifications subject to change without notice

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

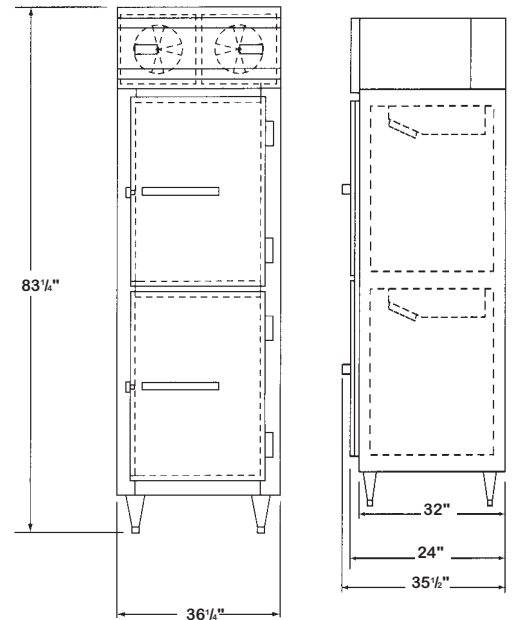

**DL1RFX-SS
FRONT VIEW**

SIDE VIEW

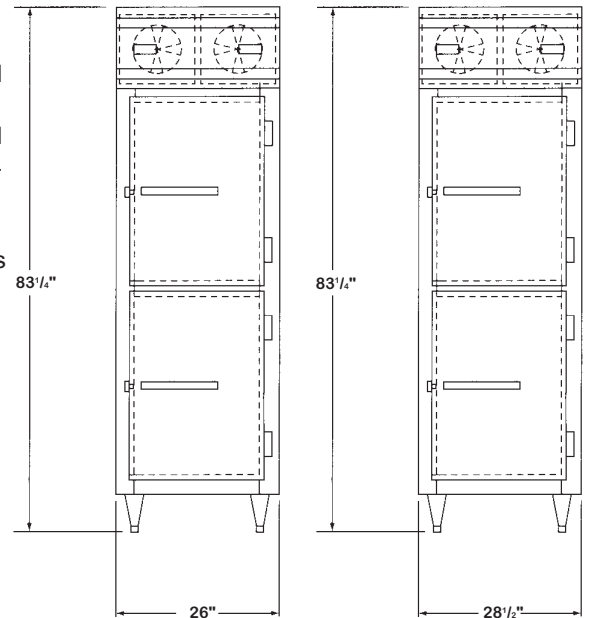

**DL1RF-SS
FRONT VIEW**

**DL1RFE-SS
FRONT VIEW**

Continental

Refrigerator

A Division of National Refrigeration & A/C Products, Inc.
539 Dunksferry Road Bensalem, PA 19020
(800) 523-7138 Fax: (215) 244-9579
www.continentalrefrigerator.com

DL1RF305