

# Continental

## Refrigerator

*Designer-line*  
REFRIGERATOR/FREEZER

SHALLOW DEPTH  
OVER/UNDER DUAL TEMP  
REFRIGERATOR/FREEZER

Utilizing Environmentally Safe, CFC-free R-134a/ R-404a Refrigerant

### Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration Systems
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Magnetic Snap-In Door Gaskets
- Cylinder Lock In Each Door
- Automatic Electric Condensate Evaporator
- Adjustable 6" Stainless Steel Legs
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Digital Thermometers
- Automatic Electric Defrost On Freezer Systems
- Automatic Interior Lighting



DL1RFS-SS



DL1RFES-SS

### Models Available

- Remote
- Hinged Glass Door
- Consult Factory

### OTHER MODELS AVAILABLE

- DL1RFXS-SS

Standard (S/S Front, Aluminum Ends & Interior)  
Suffix SA (S/S Exterior, Aluminum Interior)  
Suffix SS (S/S Exterior & Interior)

### Refrigeration System

Two "performance rated", air cooled, hermetically sealed, capillary-type refrigeration systems are installed on the top of each dual temp. Plasticized fin coil and air circulating fans are contained within an easily accessible, low-profile, interior ceiling mounted housing. Both refrigeration systems are fully charged with refrigerant and evenly matched providing equal air distribution. Refrigerator sections are designed to maintain 38-40 degrees Fahrenheit (3 to 5 degrees Centigrade), and Freezer sections 0 degrees Fahrenheit (-18 degrees Centigrade) while operating with an unrestricted air supply in a maximum ambient temperature of 100 degrees Fahrenheit. Freezer systems have an automatic electric defrost timer which initiates defrost cycles at pre-determined intervals. All condensate water is directed to the cabinet bottom for connection to an automatic thermostatically controlled evaporator which is supplied with each model. A strict quality-assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

### Cabinet Construction

All materials are of top quality, assembled to conform with strict quality-assurance requirements. The cabinet front and doors are constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminates overlapping panels with raw edges. Cabinet body, and doors are insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Full length louvered air grille located above the doors allows equal air circulation to the condensing units. Easily removable, low wattage, anti-sweat door heaters concealed by a non-metallic, non-conductive, high-impact thermal breaker strip eliminate condensate build up on the cabinet front. Automatic interior lighting is controlled by door openings. Cabinets are equipped with 6-inch adjustable stainless steel legs.

### Shelving

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced 3/4" apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life. Adjustments are in 1/2 inch increments and a wide door opening allows the use of a variety of optional pan and tray slide types.

### Door Construction

Door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam-action, lift-off type featuring positive safety stop at 120 degrees.



# Designerline

## REFRIGERATOR/FREEZER

MODEL DL1RFS-SS    MODEL DL1RFXS-SS    MODEL DL1RFES-SS  
 ONE SECTION    ONE SECTION    ONE SECTION  
 Reach-In    Reach-In    Reach-In

### CHARACTERISTICS

#### DIMENSIONAL DATA

Net Capacity (cu. ft.) Refrigerator	10	16	11
Net Capacity (cu.ft.) Freezer	10	16	11
Width, Overall (in.)	26	36 <sup>1</sup> / <sub>4</sub>	28 <sup>1</sup> / <sub>2</sub>
Depth, Overall (Incl. Hdls.) (in.)	29 <sup>1</sup> / <sub>2</sub>	29 <sup>1</sup> / <sub>2</sub>	29 <sup>1</sup> / <sub>2</sub>
Depth (Less Door(s) (in.)	26	26	26
Depth (Doors(s) Open 90°) (in.)	49 <sup>3</sup> / <sub>8</sub>	59 <sup>7</sup> / <sub>8</sub>	51 <sup>7</sup> / <sub>8</sub>
Clear Door Width (in.)	19 <sup>3</sup> / <sub>8</sub>	29 <sup>5</sup> / <sub>8</sub>	21 <sup>7</sup> / <sub>8</sub>
Clear Half-Door Height (in.)	27 <sup>1</sup> / <sub>2</sub>	27 <sup>1</sup> / <sub>2</sub>	27 <sup>1</sup> / <sub>2</sub>
Height, Overall (Incl. 6" Legs)(in.)	83 <sup>1</sup> / <sub>4</sub>	83 <sup>1</sup> / <sub>4</sub>	83 <sup>1</sup> / <sub>4</sub>
Half Doors	2	2	2
Shelves	4	4	4
Shelf Area (sq. ft.)	10.2	24.4	10.2

#### REFRIGERATION DATA

Condensing Unit Size (H.P.) Ref.	1/5	1/4	1/5
Condensing Unit Size (H.P.) Frz.	1/4	1/3	1/4
Capacity (BTU/hr)*Ref.	1725	1940	1725
Capacity (BTU/hr)*Frz.	1250	1590	1250

#### ELECTRICAL DATA

Cabinet Specifications	115/60/1	115/60/1	115/60/1
Feed Wires (Incl. Ground)	3/3	3/3	3/3
Condensing Unit Specs.	115/60/1	115/60/1	115/60/1
Total Amperes	5.3/5.4	6.9/7.6	5.3/5.4
Cabinet Amperes	0.9/0.9	1.6/1.6	0.9/0.9
Defrost Amperes	5.2	6.5	5.2
Power Supply Cord	yes/yes	yes/yes	yes/yes

#### SHIPPING DATA


Height – crated (in.)	85 <sup>1</sup> / <sub>2</sub>	85 <sup>1</sup> / <sub>2</sub>	85 <sup>1</sup> / <sub>2</sub>
Width – crated (in.)	31 <sup>5</sup> / <sub>8</sub>	42	31 <sup>5</sup> / <sub>8</sub>
Depth – crated (in.)	42	42	42
Volume – crated (cu.ft.)	66	87	66
Weight Std – crated (lbs.)	420	440	420
Weight SS – crated (lbs.)	480	500	480
Weight Std – uncrated (lbs.)	320	340	320
Weight SS – uncrated (lbs.)	380	400	380

\*Rating @ +25° F Evaporator, 90° Ambient (Refrigerator)

\*Rating @ -15° F Evaporator, 90° Ambient (Freezer)


Note: All specifications subject to change without notice

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

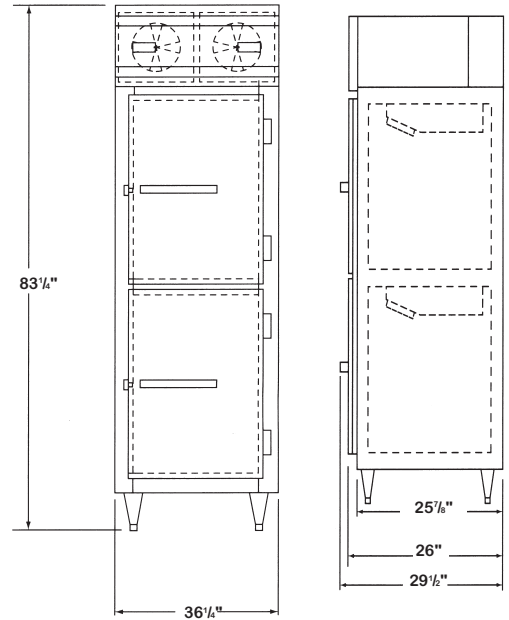

**DL1RFX-SS  
FRONT VIEW**

**SIDE VIEW**

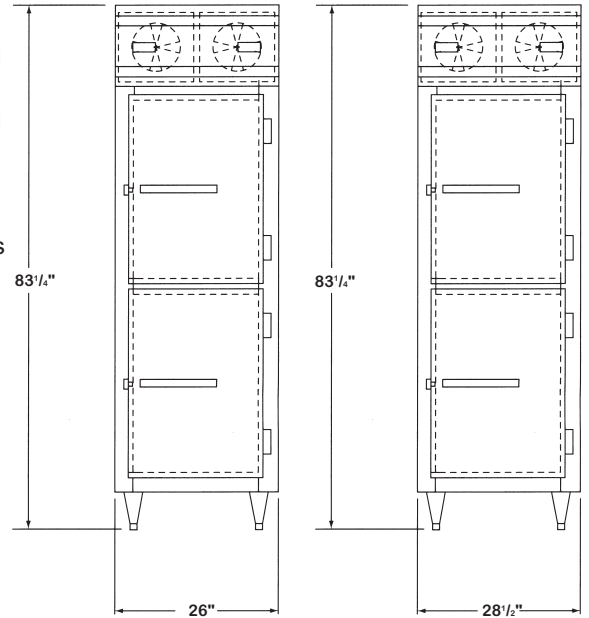

**DL1RF-SS  
FRONT VIEW**

**DL1RFE-SS  
FRONT VIEW**

# Continental

Refrigerator

A Division of National Refrigeration & A/C Products, Inc.  
 539 Dunksferry Road Bensalem, PA 19020  
 (800) 523-7138 Fax: (215) 244-9579  
 www.continentalrefrigerator.com

DL1RFS607