

# DESIGNER LINE ROLL-IN WARMER

**Model: DL1WI**

## 1-Section Roll-In Warmer with 66¼" Cart Capacity

Standard - Stainless steel front, aluminum end panels and interior  
 Suffix SA- Stainless steel exterior, aluminum interior  
 Suffix SS - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of door (consult factory)	<ul style="list-style-type: none"> <li>One way security screws</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>
Roll-Thru	<ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>
Hinged glass door	

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### HEATING SYSTEM

Self-contained, performance-rated "plug" warming system  
 90°F - 180°F temperature range  
 Humidity relief vent with master on/off control switch  
 Unique air flow distribution ducts  
 Heating system is accessible on top of cabinet, separate from the food zone

#### CABINET ARCHITECTURE

Removable stainless steel rack guides  
 Removable stainless steel ramp  
 Reinforced stainless steel floor  
 3" non-CFC polyurethane foam insulation  
 Chrome-plated flow line handle  
 Cam action, lift off hinges  
 Magnetic snap-in door gasket  
 Cylinder lock in door  
 Self-closing door  
 66 1/2" high door openings (66 1/4"H rack capacity\*)

#### Standard Finish

Stainless steel front, aluminum end panels and interior

#### -SA Finish

Stainless steel exterior, aluminum interior

#### -SS Finish

Stainless steel exterior and interior

#### MODEL FEATURES

External thermostat control  
 External digital thermometer

\* Racks not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and heating "plug" system can be easily removed and reinstalled at installation site where space limitations are confining.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	32 (906 cu l)
Width, Overall (in.)	35 1/4 (895 mm)
Depth, Overall (incl. handles) (in.)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Door(s)	1
Rack Capacity**	1 ea.

### ELECTRICAL DATA



Voltage (int'l)	115/208-230/60/1 (220/50/1)
Total Wattage @ 208-230 Volts	1500
Feed Wires (incl. ground)	4
Total Amps (int'l)	7.9 (7.2)
10 ft. Cord/Plug [attached] (int'l)	No (No)

### SHIPPING DATA

Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	94 (2661 cu l)
Weight Std - Crated (lbs.)	415 (188 kg)
Weight SS - Crated (lbs.)	505 (229 kg)
Weight Std - Uncrated (lbs.)	330 (150 kg)
Weight SS - Uncrated (lbs.)	405 (184 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole millimeter.

## Model Plan Views

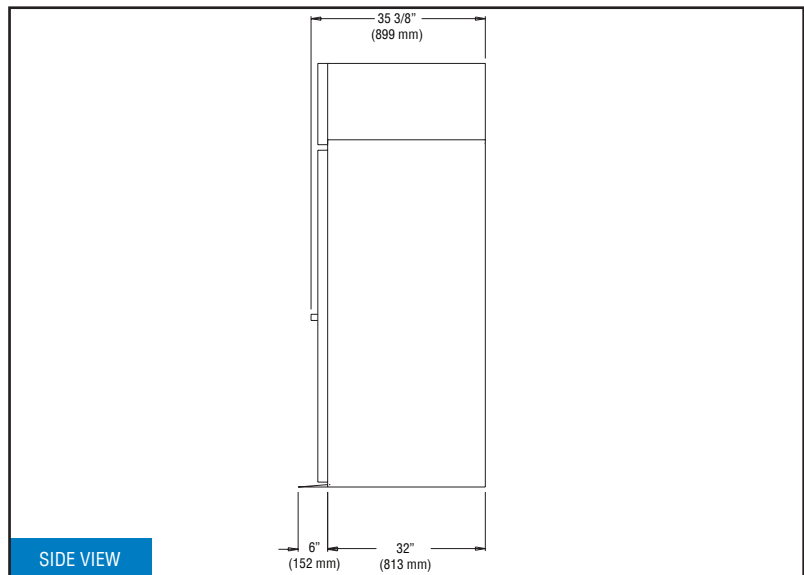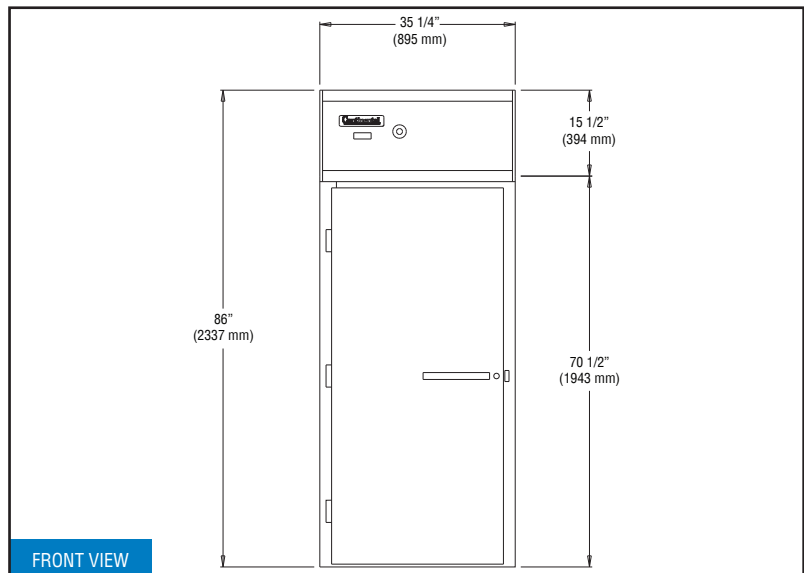

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

### HEATING SYSTEM (Range 90°F - 180°F)

Electrically operated heating system is controlled by means of a highly sensitive calibrated thermostat mounted on the cabinet front. Fin strip heating elements are located at the base of the interior. Air circulating blower located in a top mounted, concealed "plug" housing distributes heat throughout product zone, assuring uniform cabinet temperatures. Cabinet top has a built-in humidity relief vent. The entire "plug" system is mounted on a sturdy steel, rail-type base which can be easily removed if refrigerator or freezer conversion is desired. A strict quality assurance team inspects all material and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

### INSULATION

All cabinet walls, top and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

### CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements.

The cabinet front is constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor-tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminated overlapping panels with raw edges. Cabinet body is insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Automatic interior lighting is controlled by door openings. Cabinets are equipped with an easily removable, stainless steel ramp and interior rack guides.

### DOOR CONSTRUCTION

Solid hinged door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam action, lift-off type featuring positive safety stop at 120 degrees.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.