

# Continental

## *Designer-line* REFRIGERATORS

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



DL48-12C

### Models Available

- |            |            |            |
|------------|------------|------------|
| • DL27-8C  | • DL48-8C  | • DL48-10C |
| • DL48-12C | • DL60-8C  | • DL60-12C |
| • DL60-16C | • DL72-12C | • DL72-18C |
| • DL72-18C |            |            |

### Optional Features & Accessories

- |                       |                     |
|-----------------------|---------------------|
| • Remote Models - R   | • Single Overshelf  |
| • Electric Condensate | • Double Overshelf  |
| • Additional Shelves  | • Pan Opening Sizes |
| • Door Locks          |                     |

## Refrigerator

**SANDWICH UNIT  
REFRIGERATOR  
w/CUTTING TOP**

### Standard Features

- Unique Field Assembled, Bottom Mounted Ventilation System Designed To Allow Cabinets To Be Flush Against A Wall Or Built Into A Counter To Conserve Space
- 19" Deep, Full Length Nylon Cutting Board
- Unique Air Flow Distribution Allows Pan Product To Maintain 33°-41°F Being In Compliance With and Certified Under The New '98 NSF Standard For Preparation Units
- Modern, State-of-the Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- Spring Loaded, Self Closing Door
- Magnetic Snap-In Gasket
- Adjustable 6" Stainless Steel Legs
- Heavy-Duty, Epoxy-Coated Steel Shelves
- Cabinet Construction Consisting of Stainless Steel Exterior and Interior
- Completely Enclosed, Vented & Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- 1/6 Size Pans, 4" Deep
- 10 ft Cord and Plug Attached

### REFRIGERATION SYSTEM

The self-contained refrigeration system is rear mounted, concealed behind a removable louvered cover. Full-length front air grille allows for even air circulation to condensing unit. A "Performance Rated", air-cooled, hermetically sealed, capillary type refrigeration system is installed in each model. Plasticized finned coil and air circulating fans are contained within an easily accessible rear mounted housing. Our unique airflow design allows the cabinet to be enclosed on both sides or to be mounted flush against a wall. Our refrigeration system, fully charged with R-134a refrigerant, is designed to maintain 38° - 40° Fahrenheit while operating with an unrestricted air supply in an ambient temperature of 100° Fahrenheit. All condensate water is directed to a non-electric condensate vaporizer located in the compressor compartment, thus no plumbing is required. A strict quality assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are performance tested for a minimum of 16 hours prior to crating.

### CABINET CONSTRUCTION

All materials are of top quality and are assembled under rigid supervision conforming to strict quality assurance requirements. Case is of all metal welded construction and is internally supported and braced for rigid unit construction. Exterior cabinet back and bottom are heavy gauge galvanized steel. Worktop is constructed of heavy gauge polished stainless steel for durability.

Cabinet design eliminates overlapping panels with raw edges. Interior corners are rounded with a ¼" radius for cleaning ease. All cabinet joints and seams are vapor-tight sealed. An easily removable anti-sweat door heater, concealed by a non-metallic, non-conductive, high impact thermal breaker strip, eliminates condensation build-up on case front.

### INSULATION

All cabinet walls, top, and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

### SHELVING

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced ¼" apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life.

### DOOR CONSTRUCTION


Door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gaskets are self adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Hinges are spring loaded, heavy duty, self-closing.



# Designer line

## REFRIGERATORS

MODEL	CU.FT.	1/6 Pans (4" Deep)	EXT.DIM. (WxDxH)	DEPTH (Cut BRD)	SHELF AREA	SHELVES	DOORS	HP	VOLTS	AMPS	FANS	SHIP WGHT (lbs)
DL27-8C	7.4	8	27½x35x43	19	3.5	1	1	1/5	115	6.0	2	180
DL48-8C	13.4	8	48x35x43	19	6.8	2	2	1/5	115	6.9	3	270
DL48-10C	13.4	10	48x35x43	19	6.8	2	2	1/5	115	6.9	3	270
DL48-12C	13.4	12	48x35x43	19	6.8	2	2	1/5	115	6.9	3	315
DL60-8C	17.0	8	60x35x43	19	8.1	2	2	1/4	115	7.8	3	315
DL60-12C	17.0	12	60x35x43	19	8.1	2	2	1/4	115	7.8	3	315
DL60-16C	17.0	16	60x35x43	19	8.1	2	2	1/4	115	7.8	3	315
DL72-12C	20.6	12	72x35x43	19	10.2	3	3	1/4	115	8.7	4	398
DL72-18C	20.6	18	72x35x43	19	10.2	3	3	1/4	115	8.7	4	398

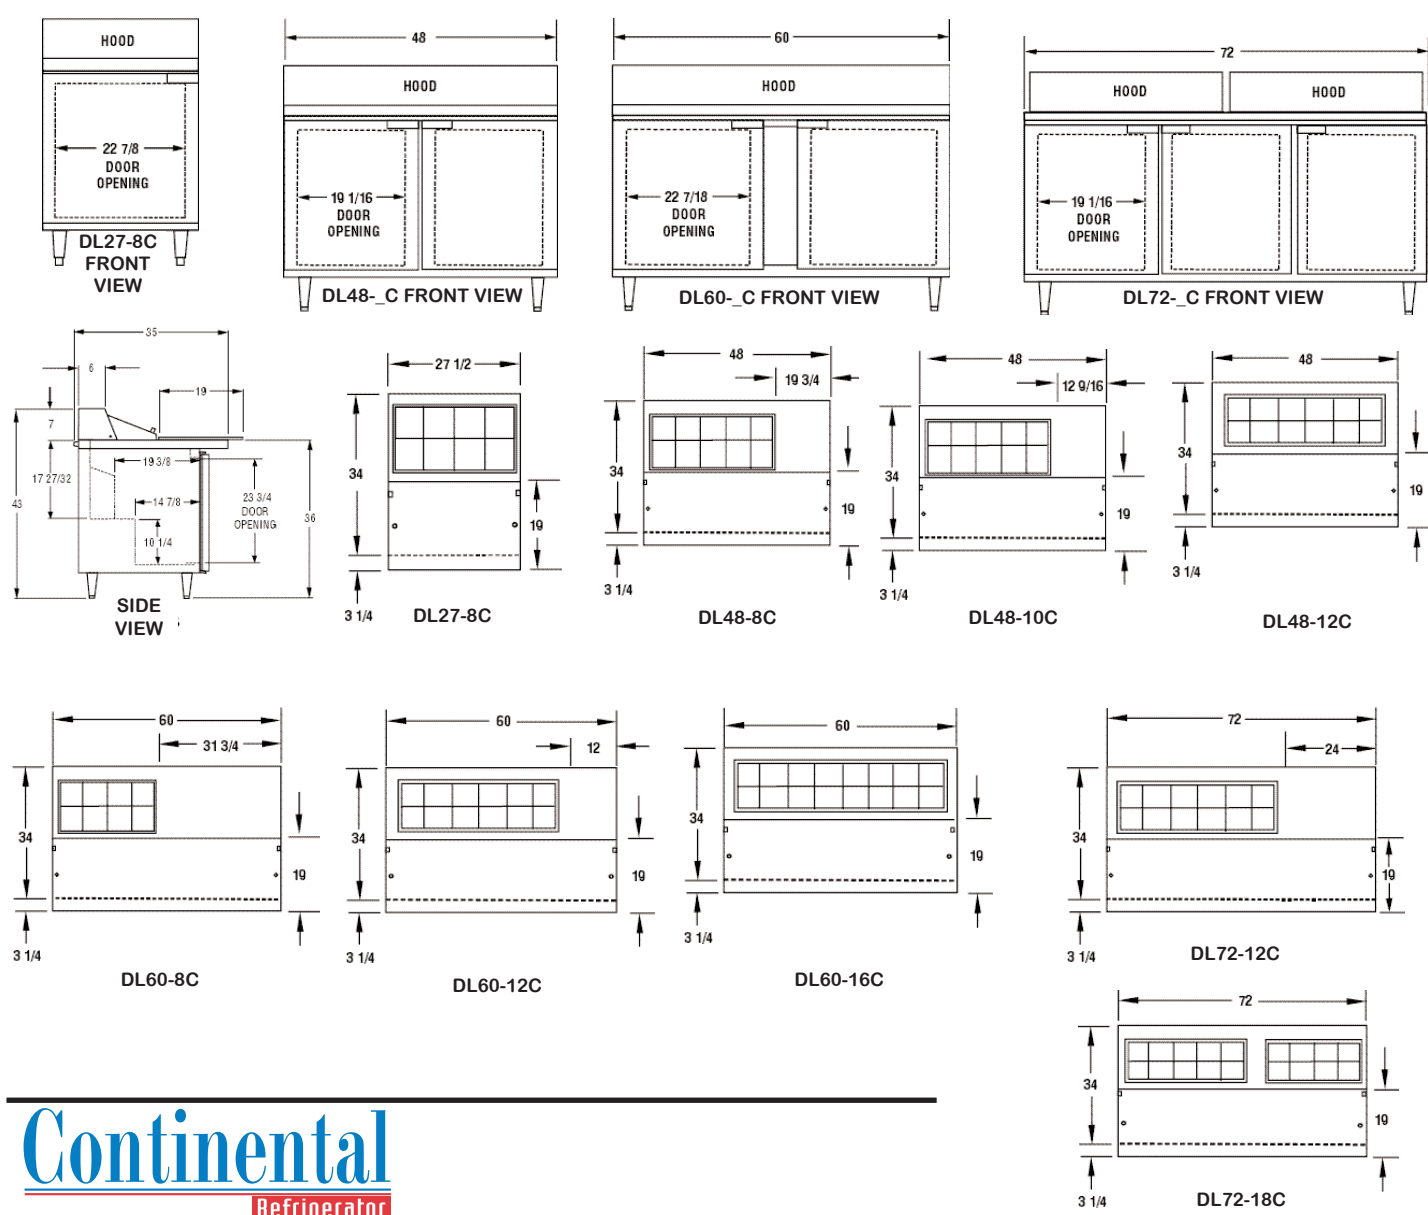

# Continental

Refrigerator

A Division of National Refrigeration & A/C Products, Inc.  
 539 Dunksferry Road Bensalem, PA 19020  
 (800) 523-7138 Fax: (215) 244-9579  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)