

DESIGNER LINE FISH FILE

Model: DLRA43-SS-F

43" Fish File Base

#304 Series stainless steel interior, stainless steel exterior.



Designer Line

Options and Accessories

(upcharge and lead times may apply)

Casters	Expansion valve system
Drawer locks	Automatic electric condensate evaporator
Remote models	Drawer section above the condensing unit*
Front breathing	6" Backsplash
Digital thermometer	

*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Non-corrosive, plasticized fin evaporator coil

Automatic, energy-saving, non-electric condensate evaporator

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

#304 Series stainless steel interior, stainless steel exterior

Adjustable, 6" stainless steel legs

Spring loaded, self closing door (over compressor) with magnetic snap-in gasket

Easy glide drawers on heavy-duty drawer track

Stainless steel pan per drawer (see back for pan configuration)

Refrigerated door section above the condensing unit

1" diameter floor cleanout drain

MODEL FEATURES

Designed for fresh fish storage on crushed ice

Easily serviceable slide out condensing unit

External dial thermometer

APPROVAL:

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	12 (340 cu l)
Width, Overall (in.)	43 (1092 mm)
Depth, Overall (incl. handles) (in.)	36 1/16 (916 mm)
Height, Overall (incl. 6" legs) (in.)	35 (889 mm)
No. of Door(s)	1
No. of Drawers	2
Interior Depth (above condensing unit) (in.)	30 (762 mm)
Interior Height (above condensing unit) (in.)	12 1/2 (318 mm)
Interior Width (above condensing unit) (in.)	17 (432 mm)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2610

ELECTRICAL DATA

Cabinet Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Condensing Unit Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	6.0 (2.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	355 (161 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	45 (1143 mm)
Depth - Crated (in.)	47 (1194 mm)

DRAWER PAN CONFIGURATIONS

(1) 16 x 18 3/8 x 6 per drawer (can accommodate 12 x 20 perforated pans)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole millimeter.



Equipped with one NEMA-5-15P Plug
(varies by country)

Continental

Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

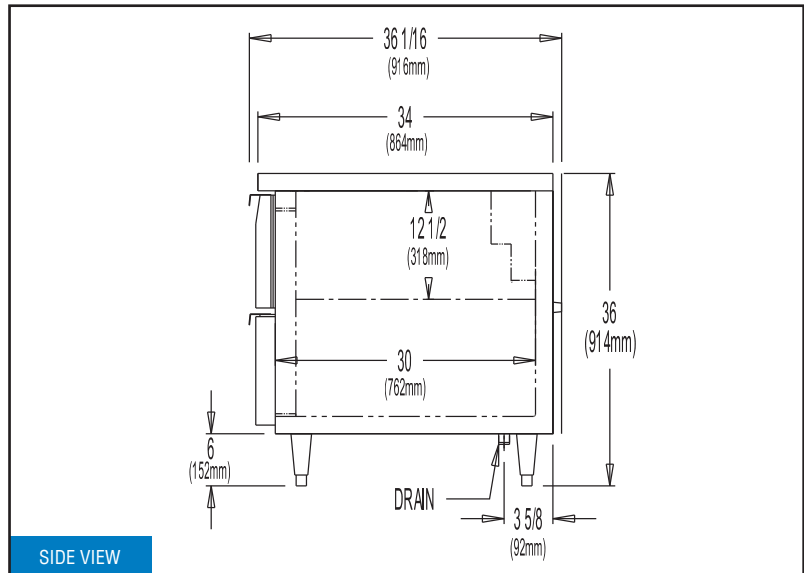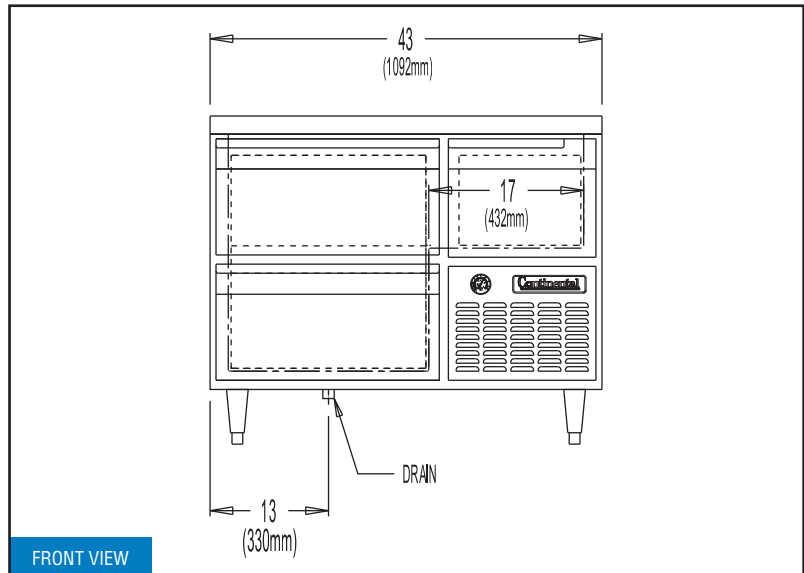

REFRIGERATION SYSTEM

The self-contained refrigeration system is rear mounted, concealed behind a removable louvered cover. Full-length front air grille allows for even air circulation to condensing unit. A "performance rated", air-cooled, hermetically sealed, capillary type refrigeration system is installed in model. Plasticized finned coil and air circulating fans are contained within an easily accessible rear mounted housing. Our refrigeration system, fully charged with R-134a refrigerant, is designed to maintain 38°-41°F while operating with an unrestricted air supply in an ambient temperature of 100°F. All condensate water is directed to a non-electric condensate vaporizer located in the compressor compartment, no plumbing is required. A strict quality assurance team inspects all materials and components to certify that the model conforms to the most exacting standards. Model is performance tested for a minimum of 16 hours prior to crating.

DOOR CONSTRUCTION

Door shell is constructed of heavy-gauge stainless steel and is internally braced and urethane foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gasket is self adjusting, heavy-duty, magnetic type. Door handle and hinges are chrome-plated and non-corrosive. Hinges are spring loaded, heavy duty and self-closing.

CABINET CONSTRUCTION

All materials are of top quality and are assembled under rigid supervision conforming to strict quality assurance requirements. Case is all welded metal construction and is internally supported and braced for rigid unit construction. Exterior, interior and worktop are heavy-gauge polished stainless steel for durability. Cabinet design eliminates overlapping panels with raw edges. Interior corners are rounded with a 1/4" radius for cleaning ease. All cabinet joints and seams are vapor-tight sealed. An easily removable anti-sweat drawer heater, concealed by a non-metallic, non-conductive, high impact thermal breaker strip, eliminates condensation build-up on case front.

INSULATION

All cabinet walls, top and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

DRAWER CONSTRUCTION

Drawer fronts and backs are constructed of heavy gauge, polished stainless steel with heavy-duty, safety grip, chrome plated handles. All drawer fronts are insulated with non-CFC polyurethane foam insulation. Full extension, lift-out type drawer frames are heavy gauge, welded stainless steel mounted on heavy-duty, easy glide, self closing drawer slides. Self adjusting, full perimeter, magnetic snap-in gaskets guarantee a positive seal.