SANDWICH UNIT REFRIGERATOR

Model: SW48-10-FB-D

48" Standard Top Sandwich Unit Refrigerator with Drawers - 10 Pans Front Breathing

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Rear-mounted cutting board	
Stainless steel end panels - SA models	Flat insulated night cover	
Glass doors in lieu of drawers - GD models	Remote models	
Stainless steel finished back in lieu of aluminum	Drawer locks	
Solid doors in lieu of drawers	Digital thermometer	
Overshelves (single or double)	Crumb catcher	
Automatic, electric condensate evaporator	Three tier drawers	
Expansion valve system		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Magnetic snap-in drawer gaskets
12" deep, full length nylon cutting board
Stainless steel roll-out drawers
Insulated lid
3 5/8" casters
Completely enclosed, vented and removable case back

MODEL FEATURES

(10) 1/6 size non-recessed pans, 4" deep	
Interior hanging thermometer	

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

APPROVAL:

Model Specifications

Mod	el P	lan \	liews

DIMENSIONAL DATA	
DIMENSIONAL DATA	

DIMENDIONAL DATA	
Net Capacity (cu. ft.)	13.4 (379 cu l)
1/6 Size Pans (4" deep)	10
Width, Overall (in.)	48 (1219 mm)
Depth, Overall (in.) (incl. handles & bumpers)	31 7/16 (799 mm)
Depth, Body Only (less drawers) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	12 (305 mm)
Height, Overall (in.) (incl. 3 5/8" casters)	40 7/8 (1038 mm)
No. of Drawers (two tier)	4
No. of Drawers (three tier)	6
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	7.3 (3.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	268 (122 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	46 (1168 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 18 x 6 pan per drawer or (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer

Three Tier: (1) $12 \times 18 \times 3 1/2$ pan per drawer or (1) 1/2 size $\times 4 \& (1) 1/3 \times 4$ pans per drawer

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.






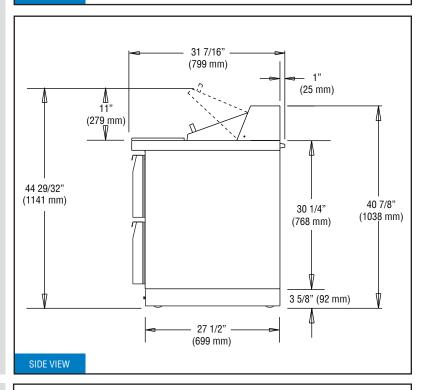

Note: Shown with two tier drawers.

FRONT VIEW

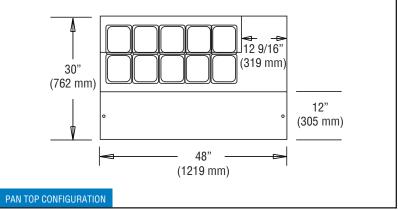

© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.