SANDWICH UNIT REFRIGERATOR

Model: SW48-18M-HGL-FB-D

48" Mighty Top Sandwich Unit with Drawers and Hinged Glass Lid 18 Pans - Front Breathing

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Rear-mounted cutting board	
Stainless steel end panels - SA models	Remote models	
Glass doors in lieu of drawers - GD models	Drawer locks	
Stainless steel finished back in lieu of aluminum	Adjustable legs	
Solid doors in lieu of drawers	Digital thermometer	
Automatic, electric condensate evaporator	Crumb catcher	
Expansion valve system	Three tier drawers	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Magnetic snap-in drawer gaskets
8" deep, full length nylon cutting board
Stainless steel roll-out drawers
3 5/8" casters
Completely enclosed, vented and removable case back
Energy-efficient, 2-pane, Low-E glass lid
Energy-efficient, 2-pane, Low-E glass lid Aluminum glass frame with satin finish
Aluminum glass frame with satin finish

MODEL FEATURES

(18) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	13.4 (379 cu l)
1/6 Size Pans (4" deep)	18
Width, Overall (in.)	48 (1219 mm)
Depth, Overall (in.) (incl. handles & bumpers)	35 (889 mm)
Depth, Body Only (less drawers) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	8 (203 mm)
Height, Overall (in.) (incl. 3 5/8" casters)	35 5/8 (905 mm)
No. of Drawers (two tier)	4
No. of Drawers (three tier)	6
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	7.3 (3.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	313 (142 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	46 (1168 mm)

DRAWER PAN CONFIGURATIONS


Two Tier: (1) $12 \times 18 \times 6$ pan per drawer or (1) 1/2 size $\times 6 \& (1) 1/3 \times 6$ pans per drawer


Three Tier: (1) $12 \times 18 \times 3 1/2$ pan per drawer or (1) 1/2 size x 4 & (1) $1/3 \times 4$ pans per drawer


* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



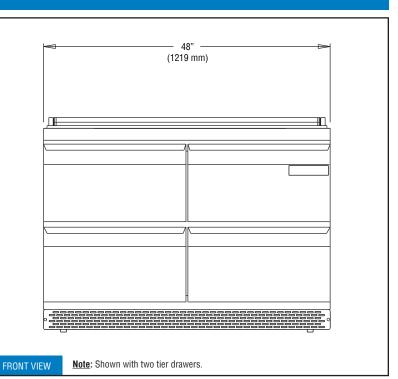

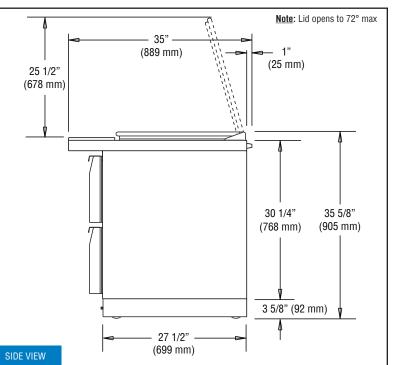

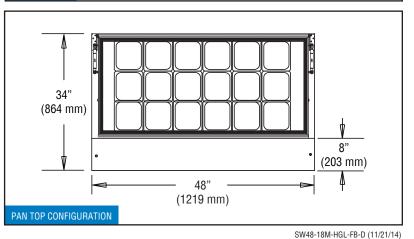

© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.