SANDWICH UNIT REFRIGERATOR

Model: SW48-8-FB

48" Standard Top Sandwich Unit Refrigerator with Solid Doors - 8 Pans Front Breathing

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel shelves
Expansion valve system
Rear-mounted cutting board
Flat insulated night cover
Remote models
Door locks
Digital thermometer
Crumb catcher

Consult factory for other model configurations, options and accessories

Project Name:

Model Specified:

Location:

Item No: Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique air flow distribution allows pan product to maintain 33° - 41°F

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

12" deep, full length nylon cutting board

Insulated lid

3 5/8" casters

Completely enclosed, vented and removable case back

MODEL FEATURES

(8) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable doors

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model	Specif	ica	ion

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	13.4 (379 cu I)
1/6 Size Pans (4" deep)	8

Width, Overall (in.) 48 (1219 mm) Depth, Overall (in.) 31 7/16 (799 mm)

Depth, Body Only (less doors) (in.) 27 1/2 (699 mm)

Depth, Cutting Board (in.) 12 (305 mm)

Height, Overall (in.) 40 7/8 (1038 mm) (incl. 3 5/8" casters)

Shelf Area (sq. ft.) 6.8 (.6 sq m)

No. of Shelves 2 No. of Doors 2

Interior Depth (in.) 19 3/8 (492 mm)

26 1/4 (667 mm) Interior Height (in.)

Interior Width (in.) 44 (1118 mm)

REFRIGERANT DATA

(incl. handles & bumpers)

Condensing Unit Size (H.P.) 1/5 Capacity (BTU/Hr)* 1620

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	7.3 (3.6)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	267 (121 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	46 (1168 mm)


^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest



Equipped with one NEMA-5-15P Plug (varies by country)

FRONT VIEW

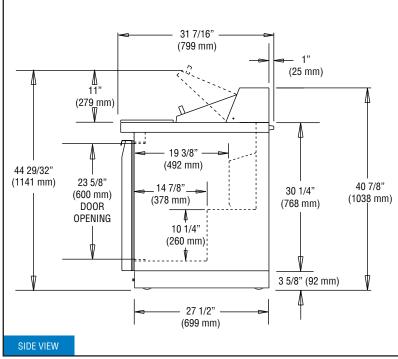

Model Plan Views

48"

(1219 mm)

19 5/8"

(498 mm)

DOOR OPENING

Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







 $\hfill \ensuremath{\text{\bigcirc}}$ Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

